

**All you want to
know about the
BBC MICRO**

electron
user

Vol 1 No 1 October 1983

THE MICRO USER

Volume 1
Number 8
October 1983
£1

INSIDE!
First FREE
issue of a
bright new
magazine

**We review
the Hobbit**

**How to link
two BBC micros**

**Make your own
light pen**

**Contour mapping
by computer**

**Win Acorn's new
teletext adaptor**



Gone Fishin'

**Join the anglers on
the banks of Lake Beeb**

**144
PAGES**

CHES

Excellent use of the high-res graphics help to make this the most flexible chess game available. A choice of hundreds of different skill levels control the playing strength. This game has been continually updated over the past few years and this latest version incorporates a host of new facilities, including the ability to:

- Change the board and piece colours.
- Replay a game, move by move.
- Change levels whilst playing.
- Ask the computer to suggest a move.
- Force the computer to make a move at any time.
- Save a game on tape or disc.
- Blitz play within a time limit.
- Mate in 2, 3 or 4 moves.
- Castle and en passant.

Quite simply the best chess game available for the BBC Micro.



Only
£8.95 including VAT, postage & packing.

... New Release ...

Draughts

from the same author as our best selling Chess program this game incorporates many of the features of that program — various skill levels, save a game to tape, replay a stored game, etc. etc. A high resolution colour display (the user may change the colours) and an option to choose the rules of play make this game extremely flexible.

Works with all Operating Systems.

Only
£8.95 including VAT, postage & packing.

Use this order form or phone us with Access/Barclaycard No. for prompt despatch.

Please send me a.s.a.p. cassette(s) at £8.95 each including VAT and delivery.

Cheque enclosed for £ payable to Computer Concepts or charge ACCESS ☐ or BARCLAYCARD ☐.

Account No.

Name

Address

Postal code

VAT No. 366 9483 01

CASH OR ROYALTIES. We specialise in quality software for the BBC machine and can offer the best rates around. We are always interested in obtaining new programs to add to our range and offer either a cash payment for the outright purchase or alternatively pay a royalty on each one sold.

JASMINE SOFTWARE

**ARE YOU A
PROGRAMMER?**

or

Do you have any ideas for
games or educational
software?

We are looking for programs
or ideas.

Royalties or lump sums paid
for quality work.

INTERESTED?

Contact Dave Hood on
0274 729306
or write to:

JASMINE SOFTWARE

**92 New Cross Street, Bradford BD5 8BS.
Telephone: 0274 729306**



Vol. 1 No. 8 October 1983

Managing Editor
Derek Meakin

Features Editor
Mike Bibby

Technical Editor
Mike Cook

Art Editor
Peter Glover

Advertisement Manager
John Riding

Advertising Sales
Mike Hayes

Marketing Manager
Linda Dobson

Tel: 061-456 8383 (Editorial)
061-456 8500 (Advertising)

Telex: 667664 SHARETG

Published by:
Database Publications Ltd,
Europa House, 68 Chester Road,
Hazel Grove, Stockport SK7 5NY.

Subscription rates for
12 issues, post free:

£12 - UK
£13 - Eire (IR £16)
£18 - Rest of world
(surface)
£30 - Rest of world
(airmail)

The Micro User welcomes program listings and articles for publication. Material should be typed or computer-printed, and preferably double-spaced. Program listings should be accompanied by cassette tape or disc. Please enclose a stamped, self-addressed envelope, otherwise the return of material cannot be guaranteed. Contributions accepted for publication will be on an all-rights basis.

© 1983 Database Publications Ltd. No material may be reproduced in whole or in part without written permission. While every care is taken, the publishers cannot be held legally responsible for any errors in articles or listings.

The Micro User is an independent publication and neither the BBC nor Acorn Computers Ltd are responsible for any of the articles in this issue or for any of the opinions expressed.

Distribution to the news trade in the UK and Ireland is by Wells Gardner, Darton and Co Ltd., Faygate, Horsham, West Sussex RH12 4SU (tel: Faygate 444). Enquiries regarding overseas distribution should be made direct to the publishers.

CONTENTS

NEWS

Keep in touch with all the latest happenings in the exciting world of the BBC Micro.

17

LOOPS

Get your micro going round in circles with the latest instalment of our beginners' series.

22

HARDWARE

We review the Hobbit – the fast, tape-based data storage system – and give our verdict.

24

EDITING

Our further explorations of the world of print fields and spaces result in neater output.

31

GONE FISHIN'

You'll fall hook, line and sinker for our gentle yet fascinating game of the month.

35

STRUCTURE

The last part of Roy Atherton's highly acclaimed series leaves you with three golden rules.

39

GRAPHICS

Circles made simple is the theme of this month's colourful exploration of computer graphics.

46

SOFTWARE SCENE

Our frank and thorough reviewers give their verdicts on latest programs for the BBC Micro.

49

BACK ISSUES

Make sure your Micro User collection is complete. All you've missed and how to get it.

53

INSIDE this issue



*The first edition of
ELECTRON USER –
the exciting new
magazine for users of
Acorn's latest micro,
the electrifying
ELECTRON.*

54 LINK UP

Paul Beverley shows you how to join two BBC micros, and make your own "second processor"

62 COMPETITION

Finish off a simple limerick and you could be the winner of an Acorn Teletext Adaptor.

65 UPGRADE

Add a light pen to your BBC Micro – the Beeb body building course shows you how.

76 CONTOURS

Let your micro put you on the map with this ingenious contour plotting program.

81 FORMAT

Our expert Jim Notman goes even further into formatting in the pursuit of neater listings.

87 WORKSHOP

This month we feature a program that allows you to add joystick control to your programs.

91 TAPE OFFER

Save yourself the chore of keying in programs from this issue with this month's cassette.

95 BASICODE

Micro shall speak unto micro with this revolutionary computer language from Holland.

113 MICROMAIL

The section you write yourself – a small selection from the letters pouring in every month.

BX-80 COLOUR PRINTER

Designed for use with the BBC Micro

Prints in 7 colours on plain paper


Colour screen printing in ALL Modes (inc. Mode 7)

Uses RS423 output. Cable supplied
(Note: OS 1.2 only)

Printer RS423 input has 3.5Kbytes buffer
Special Mode 7 Teletext 2 page store with printout size option.

125 CPS primary colour speed for listing, etc. (5 x 7 matrix)
Screen dump listing supplied

ONLY £495 + VAT

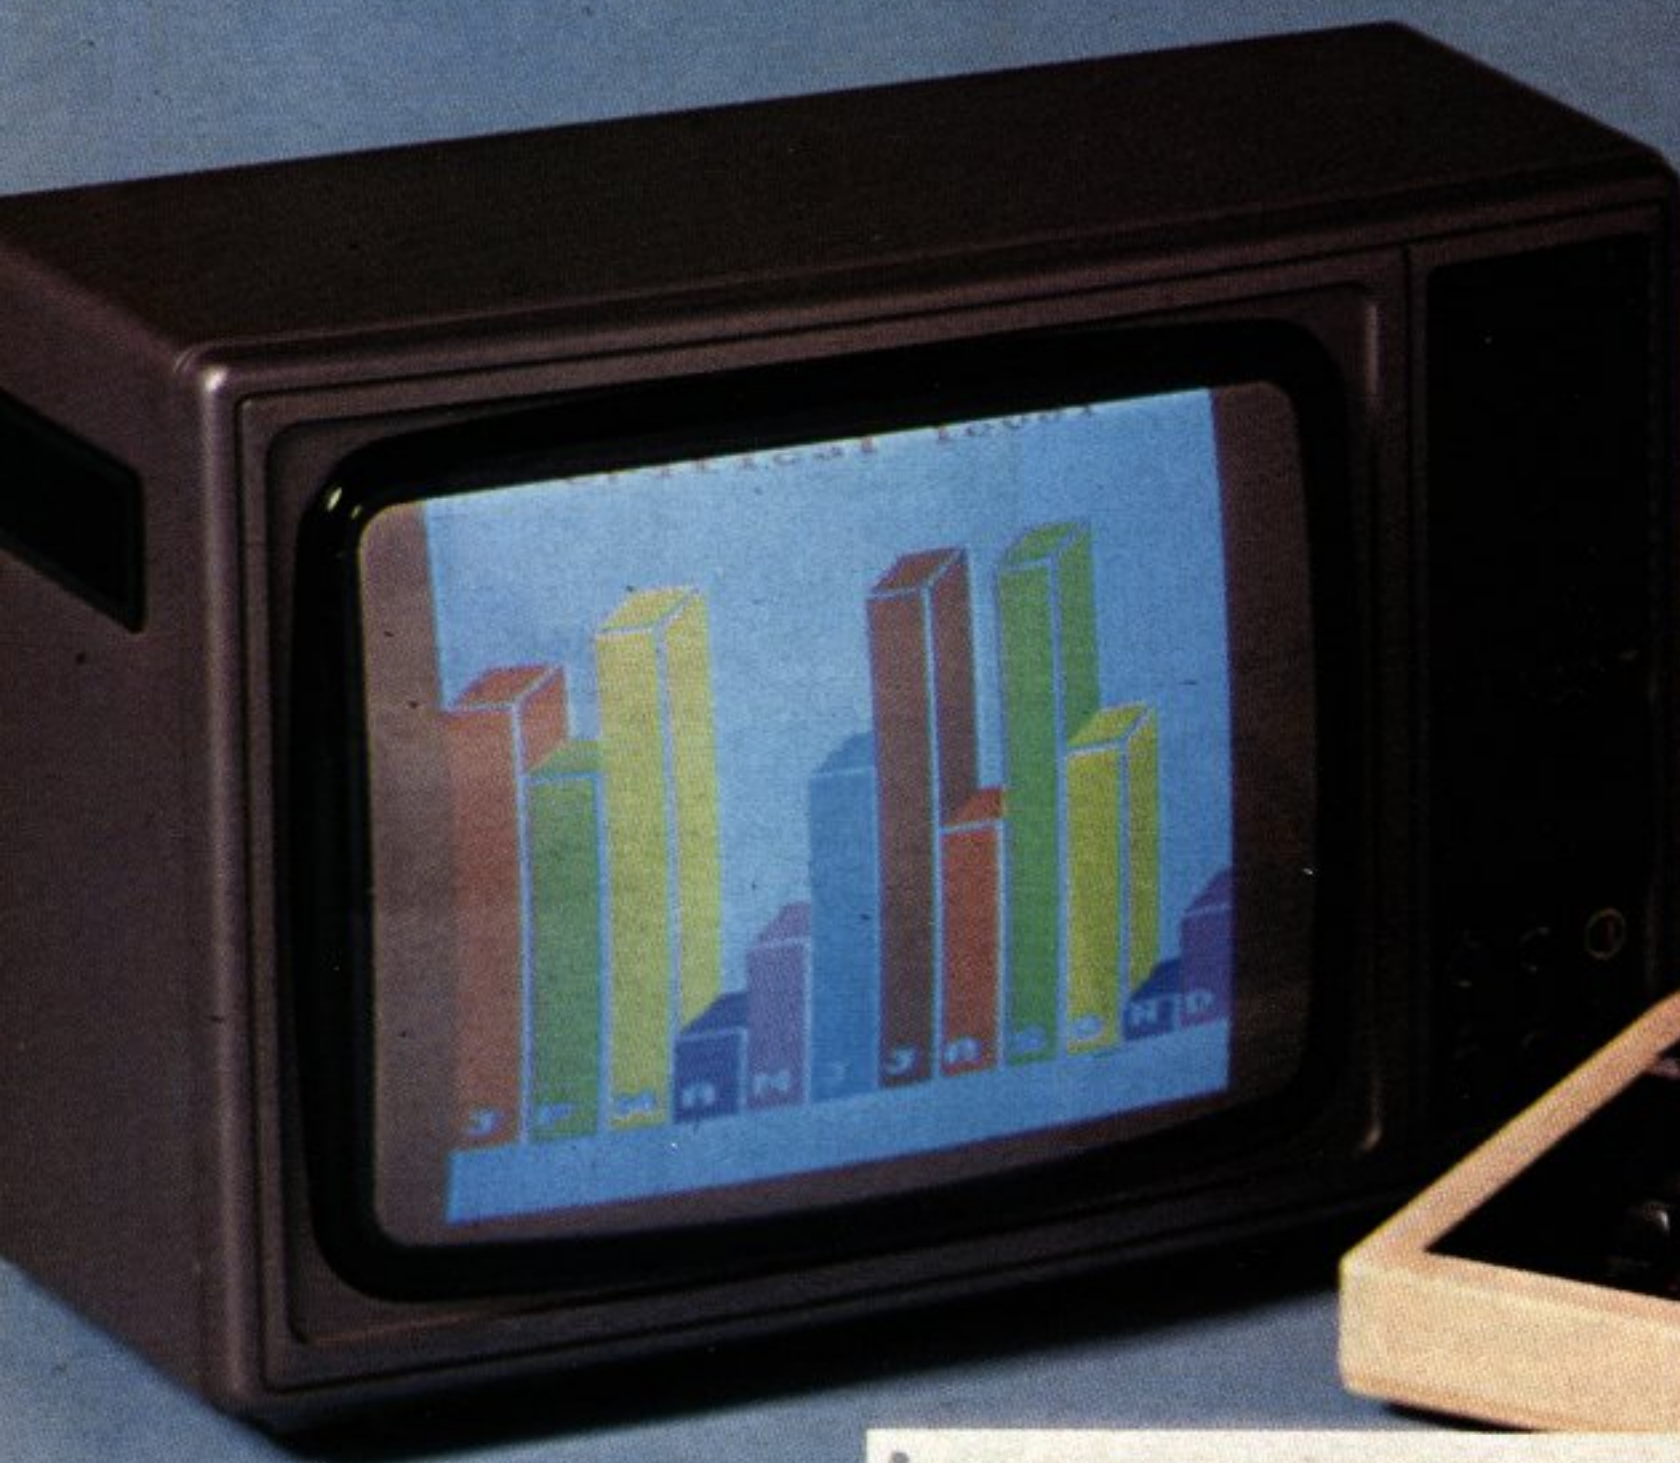

Black & White Interface Card with 3.5Kbytes buffer for Epson MX80*/RX80/FX80.

All BBC Micro modes, including Teletext Mode 7.

Board. RS423 cable plus software
ONLY £95 + VAT

Apple II parallel interface card for MX80*/RX80/FX80 high resolution screen dumps, C/W cable.

ONLY £59 + VAT

Apple II colour dump disc for BX80 £9 + VAT

***MX80 requires printer ROM change... add £15 + VAT**

INTEGREX LTD.

**Church Gresley,
Burton on Trent, Staffs DE11 9PT.
Tel: (0283) 215432. Telex: 377106.
Prestel: 200650**



Look at our buys!

TWILLSTAR COMPUTERS LIMITED

The computer dealer with the keenest prices and service.


NewsFlash!
We are opening another store at the end of September stocked with bargains and brand new products. Look out for news of our opening day at 47 Queens Road, Slough.

BBC MICROCOMPUTER

Model B	£399
Model B+Disc Interface.....	£469
Model B+Econet.....	£446
Model B+Econet+Disc Int.....	£516
Disc Interface Kit.....	£109
Speech Synthesizer (offical BBC).....	£54
BBC 6502 2nd processor.....	£195.50
280 2nd processor.....	£295
Teletext Receiver.....	£225
Upgrade Kit.....	£50
BBC 16K Memory.....	£18.50
BBC Print User input/output port.....	£8
BBC Analogue Kit.....	£7.30
BBC Serial.....	£7.80
BBC Expansion Basket.....	£7
1.2 Operating System (incl. fitting).....	£11.50

WORD PROCESSORS

View Word Processor	£59
Word Wise Word Processor.....	£45

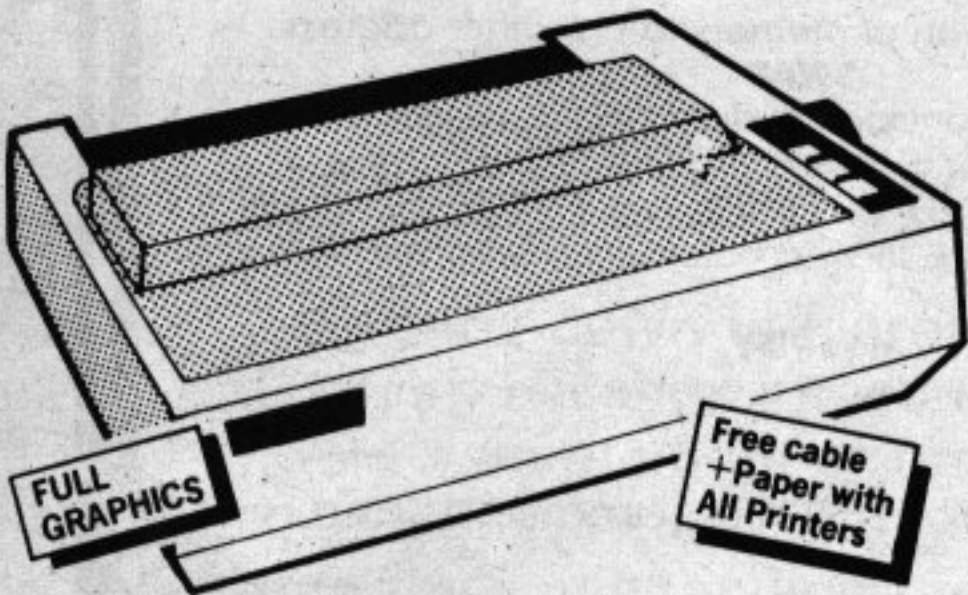

DOT MATRIX PRINTERS

Shinwa CP80 F/T	£395
Epson FX80 F/T	£425
Epson RX80 T.....	£305
NEC PC 80 20.....	£375
Parallel Printer Lead.....	£13
2000 Sheets Fanfold Paper.....	£15

Daisywheels

Juki 6100 Daisywheel with 2K Buffer.....	£431
Silver Reed Printer/Typewriter inc. RS232 Interface (just plugs into your BBC).....	£431

WORD PROCESSING PACKAGE


BBC Model B plus Disc/Interfaxe fitted view, Juki Daisywheel Printer, 200K Dual Disc Drives	
ONLY £1,360 (incl. all cables)	



SERVICE CONTRACTS TO EDUCATION AUTHORITIES AT DISCOUNT
OFFICIAL ORDER FORMS FROM DEALERS, GOVT. DEPTS. COLLEGES AND SCHOOLS WELCOME.

Barclaycard and Access

We can't possibly list all we stock, so pick up the phone and ring 574 5271 and just ask - we'll be pleased to give you our best prices. CARRIAGE ON COMPUTERS, PRINTERS ETC £8. No delivery charge on large orders.

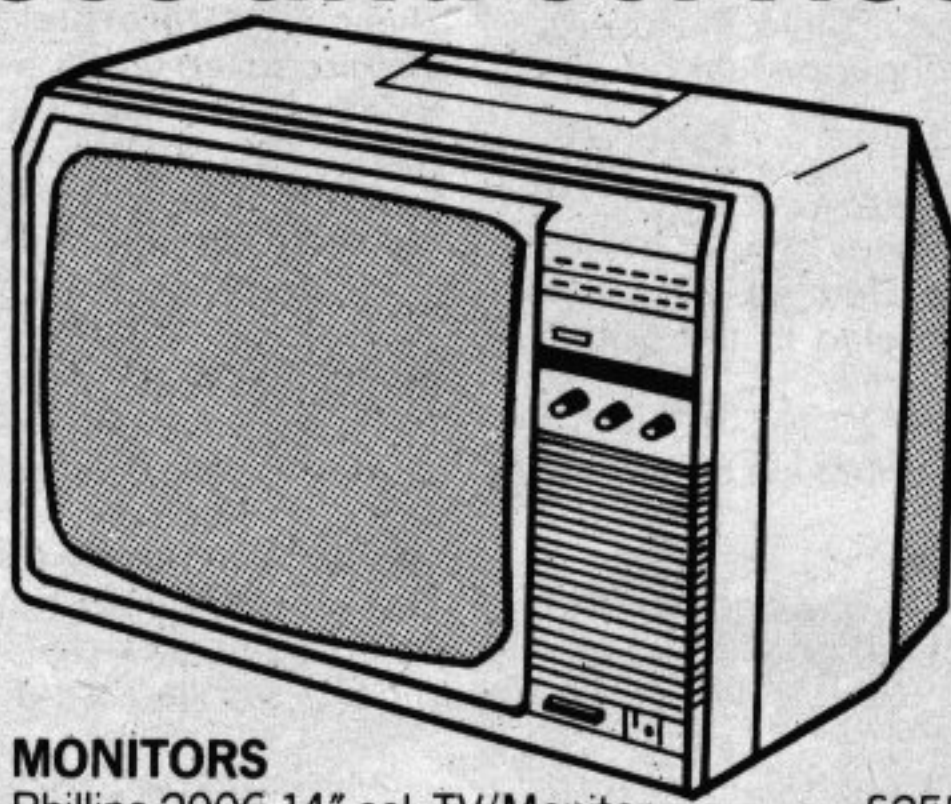

MONITORS

Phillips 2006 14" col. TV/Monitor.....	£255
Expertly converted, come to our showrooms and compare. Use it as a very high resolution colour monitor, then switch to your favourite TV programme.	
Microvitec 14" 1431.....	£287
Sanyo 14".....	£253
JVC (Electrohome) 14" High Res.....	£344
Green Screen Zenith 12".....	£89
BBC Official 12".....	£95

Disk Drives

Single Drives Cased

100K.....	£175.50
200K.....	£245
400K.....	£299

Single Drives Cased with Power Supply

100K.....	£210
200K.....	£279
400K.....	£345

Dual Drives Cased with Power Supply

200K.....	£379
400K.....	£499
800K.....	£599

Single Switchable 40/80 Track

200K.....	£255
400K.....	£310

Dual Drives Switchable 40/80 Track

200K.....	£399
400K.....	£450
800K.....	£599

Disc Cable Single.....	£9.50
Dual.....	£13.50
Disc Operating Manual & Formatting Disc.....	£10

Floppy Discs in packs of 10

Single Sided 40 Track	£20
Single Sided 80 Track	£29
Double Sided 80 Track.....	£35
Lockable Storage Boxes	£24
Library Storage Boxes.....	£2

Cassettes

All BBC Compatible	
Sanyo DR101	£44.85
Elftone.....	£32.20
Official BBC Cassette Recorder	29.95
Cassette Recorder Lead.....	£3



SOFTWARE

Business:-

Beebcalc ROM based spreadsheet	£39
Gemini Business Software	
Cashbook, Final Accounts	£52 each
Invoice & Statements, Commercial Accounts, Mailing, Lisp, Database, Stock Control, Home Accounts, Beebcalc spreadsheet Analysis, Beeb plot.....	£19.95 each
Utility:-	
Analysis Disc & Screen Dump ROM.....	£17.25
Compatible for MX80 FX80 etc. copy. Disc Doctor contains useful disc utility programs, String search, function key editing format ability.....	£25

Educational

Acornsoft:-

Speed & Light.....	£11.90
Density & Circuit.....	£11.90
Chemical Analysis.....	£13.80
Chemical Simulations.....	£13.80
Chemical Structures.....	£13.80
Jars.....	£13.80
LIPS/FORTH.....	£16.85 each
Games: Rocket, Raid, Chess, Missile Base, Snooker, and many more at	£9.95 each
We stock a large range of software from Bug Byte, Program Power, IJK, Superior A&F.	
Shuttle for BBC.....	£14.95
Flight Simulation (747)	£7.95

Books

Complete range of books including:-

Programming and Interfacing the 6502	£14.40
Easy Programming for BBC Micro.....	£5.95
35 Educational Programmes for BBC Micro.....	£6.95
Further Programming for BBC Micro.....	£5.95
Learning to use the BBC Micro	£4.95
Basic Programming on the BBC Micro.....	£5.95
21 Games for the BBC Micro	£5.95
Games for BBC Micro Play	£6.95



ODDS

Official Joysticks.....	£13
Compatible Joysticks Damping Control	£15
Dust Covers - for various machines - from.....	£3.95

All prices include VAT.

Twillstar Computers Ltd.,
17 Regina Road, Southall,
Middx. Tel: 01-574 5271
Open SIX DAYS A WEEK - 10 am-8 pm

THE ULTIMATE UTILITY ROM

Disc Doctor

This ROM started life as a few disc utility routines. However it has steadily been extended to include very many new commands and features, some of which have nothing to do with discs.

There follows a list of all the commands in this ROM. These can be entered from the keyboard or can be combined into the user's program. They are also accessible from other language ROMs such as WORDWISE.

*DIS

This is a very powerful disassembler. Special options allow 'offset' disassembly (which makes the disassembly appear to have come from another address), following of jumps and branches and skip calls to the MOS or BASIC. Output can be directed to file or the printer.

*DISCTAPE

This command will automatically transfer files, machine code and BASIC programs from a disc to tape.

*DOWNLOAD

Loads a file from tape or disc and moves it to any address. The normal address is &E00 allowing programs to be run on Disc systems without any loss of memory.

*DSEARCH

Will search the current disc for a string of characters or any sequence of bytes. The search starts from any track. When found the disc editing routine (DZAP) is entered.

*DZAP

This is a disc editing routine that displays any sector of the disc. The cursor may be moved around the sector and new values can be entered in hex, decimal or binary or as ASCII text.

*EDIT

Displays the contents of any function key for editing, so that long and complicated *KEY definitions do not have to be entered from scratch every time any alteration is needed.

*FIND

Allows a BASIC program to be searched for any string, such as variable or procedure names, displaying all line numbers in which that string occurs.

*FORM

Formats blank discs to any number of tracks. Options allow only specific tracks to be formatted. One special option will format discs that can have dual catalogues allowing 60 files per side of the disc.

This professionally written ROM contains a full help menu giving the syntax of all the commands and is totally compatible with the Acorn DFS.
Available now.

Complete with full spiral bound manual and fitting instructions.

£33.35 incl.VAT and p&p

*JOIN

This will join one or more disc files together as one file. It may also be used for making copies of any file on the disc.

*MENU

Typing *MENU or pressing M-BREAK will display a menu of all files on the disc saved under a special directory. Simply selecting one of the menu options will load and run the program.

*MOVE

Moves a BASIC program from any page to any new page in memory. Amongst many other uses this allows programs on disc machines to be moved to &E00.

*MSEARCH

Searches memory starting at the given address for any string or sequence of bytes. If the string is found, the area of memory is displayed with the memory editor (MZAP).

*MZAP

Very much like the disc editor, this displays a window into memory. Once the cursor has been moved to the correct byte, new values may be entered in hex, decimal, binary or as ASCII characters. The window may be scrolled up or down through memory.

*PARTLOAD

Allows any part of a file to be loaded into memory. This would allow a very large file to be split up into more manageable units.

*RECOVER

Any number of sectors can be loaded from the disc into memory with this command. Allows the recovery of any data from the disc such as deleted programs etc.

*RESTORE

The opposite of the above command. Puts back directly onto the disc any section of memory.

*SHIFT

Used to move any section of memory to any other address.

*SWAP

This swaps catalogues on special dual catalogue discs, allowing up to 60 files per side of a disc — almost twice the normal.

*TAPEDISC

The opposite of DISCTAPE, this will automatically transfer files from tape to disc.

*VERIFY

Verifies that the disc specified is readable.

Available NOW

NEW
RELEASE!

Termi

A Terminal emulation ROM. This ROM communicates via the RS-423 interface allowing the BBC machine to act as an intelligent terminal to other devices such as Modems, Acoustic Couplers, Mainframe computers, or other BBC machines.

This ROM may be used in several distinct modes — as a 'dumb' terminal so that it will only respond to a limited number of control codes; a custom mode which enables the user to define different defaults for the baud rates, screen modes, parity, etc; a VT52 emulation mode which makes the BBC machine act as a VT52 terminal allowing direct cursor addressing etc. Lastly, a BBC mode in which TERMI will respond to the normal BBC control sequences and so allows the micro to be used as a slave graphics terminal for instance.

£33.35 incl. VAT and p&p

A full specification of this and our range of other ROMs is available from the address below.



**COMPUTER
CONCEPTS**

Dept BMU
16 Wayside, Chipperfield, Hertfordshire. WD4 9JJ
Telephone: Kings Langley (09277) 69727



Sulis Software



An exciting new range of educational programs

Getting down to learning a tricky subject can become a good deal easier when there's an element of fun involved. And that is just what Sulis have introduced into their outstanding range of quality educational software.

In games like **BESIEGED**, (one of four in the **SPELLBOUND** series) the player learns to master the many quirks of English spelling. Correctly spelling some 'impossible' words helps to save a beleaguered city from a horde of infidels!

WORDSPLITS, available for two different age-ranges, offers hundreds of words that every child needs to recognise easily.

Not just content in getting to grips with the English language, Sulis helps tackle French verbs (regular & irregular) with **TENSE FRENCH**, takes a journey back in time with **TIME TRAVELLER** to get some historical facts right and even throws down a challenge to Shakespeare buffs with **MASTERBARD**.

Sulis's developing programme of software, initially cassette-based, is available for use on some of the most popular micros including the BBC Micro.

Each title in the Sulis range is attractively packaged (and priced!) and can be obtained from all good bookshops and computer stores. In the meantime, for a free copy of the Sulis Software catalogue, just return the coupon.

To: John Wilson, John Wiley & Sons Ltd.,
FREEPOST, Baffins Lane, CHICHESTER,
West Sussex PO19 1YP (No stamp required)
Please send me the complete Sulis catalogue

NAME
ADDRESS

BBC



Produced by
Sulis Software,
4 Church St., Abbey Green, Bath BA1 1NL,
England



Marketed by
John Wiley & Sons Ltd.,
Baffins Lane, Chichester, Sussex PO19 1UD,
England Tel. (0243) 784531

ARE YOU SERIOUS?

REPLICA is the fastest selling disc utility for the BBC Micro and THE KEY is a close second—BUT WHY?

REPLICA and THE KEY give you, the user, what you want. You have bought your disc drives and now want to take advantage of them, but most of your favourite software will not run with the disc interface and even if you are prepared to pay out for disc versions of everything you can't get them and if you have 80 track drives you might as well give up. If you know everything about the DFS, memory locations, saving procedures etc, you can probably save some of them onto disc. What's a half hour per program, and it only takes a few minutes to find, load and relocate it each time (if you can remember the sequence).

On the other hand you could buy REPLICA, enter a few details i.e. 1) program name, 2) number of sections, 3) CHAIN, *RUN or *LOAD 4) press play and then make a cup of tea whilst the program loads from cassette for the last time. When you return the program will be on the disc and shown in a menu under the name you gave it. There are now eight alternative storage methods and one of them will work with most programs. There are some exceptions but the outstanding sales figures for REPLICA indicate that they are not relevant. Many users have purchased 4 or 5 copies of REPLICA and it is now the recognised format that dealers use to display their software.

REPLICA will hold 8/10 programs on each disc, they can be erased if required and a new batch saved, but why not just buy another REPLICA and keep your programs on disc permanently (it costs about £1 per program).

REPLICA £9.95 (state 40 or 80 track)

THE KEY

THE KEY provides you with the facilities that should have been included in the Disc Filing System and also helps you reach the parts other discs can't reach. This new version of THE KEY has been made compatible with ECONET at the request of many schools, colleges and universities. The whole program has been turbocharged and the facilities are:

- 1) FORM40 – now much faster.
- 2) FORM80 – now much faster.
- 3) BACKUP – has that effect on some people because it allows even most of the protected discs to be backed up – faster too.
- 4) EDITOR – display, read and alter sectors, even if you can't list the program. Highlight any byte whilst searching, make additional searches, edit bytes – now allows entry in HEX or ASCII and in string format. Dump a sector to printer, file pointers etc etc. You can now see how data is stored on a disc and alter it if you wish. Of course, it's also faster.
- 5) RETRIEVE – don't despair when you have a corrupted disc or if a program is accidentally deleted, using RETRIEVE your worries are over.

With so much from one utility it is no wonder that THE KEY is outselling programs that cost the same but provide far less.

THE KEY £12.95 (state 40 or 80 track)

GRAFKEY/GRAFDISK

The first and best CAD program for the BBC Micro. Used in education, business, art, video etc. Recommended by LASERBUG, BBC MICRO USER, PCW, SOFT and thousands of satisfied users (see earlier issues of BBC Micro User for screen pictures). In a comparative review of the major CAD programs PCW said: "Considering the options it is by far the best value". Need we say more, if you need a graphics utility then this is it.

GRAFKEY (joystick & keyboard) £7.95
GRAFDISK (state 40 or 80 track) £12.95

SHADOW

A tape cloning program that will enable you to make security backups of your valuable cassette based software.

SHADOW works with 99% of all known programs including those with "locked" sections or those containing 2300 BAUD sections. Handles programs of any length and works with any operating systems.

SHADOW is the definitive tape backup system. Also on the same tape is a very useful program called "INSPECTOR" which allows the user to page through memory, search for a string, etc.

BOTH PROGRAMS £8 incl.
(This program for personal use only).

JOYSTICK UTILITY


Converts non-joystick programs to work with joysticks. Works with any program using INKEY(-), which applies to most programs. Easy to use, just press the keys you want to transfer. Supplied on cassette but can be transferred to disc.
CASSETTE £5.00

SINGLE KEY ENTRY Requires 1.2 O.S.

A very useful utility that provides single key input of 66 key words. Just like having 66 function keys. Compatible with issue 1 & 2 basic and discs.
CASSETTE £5 inclusive

JOYSTICKS

Pair of fully proportional joysticks of compact and handy size
£17.95

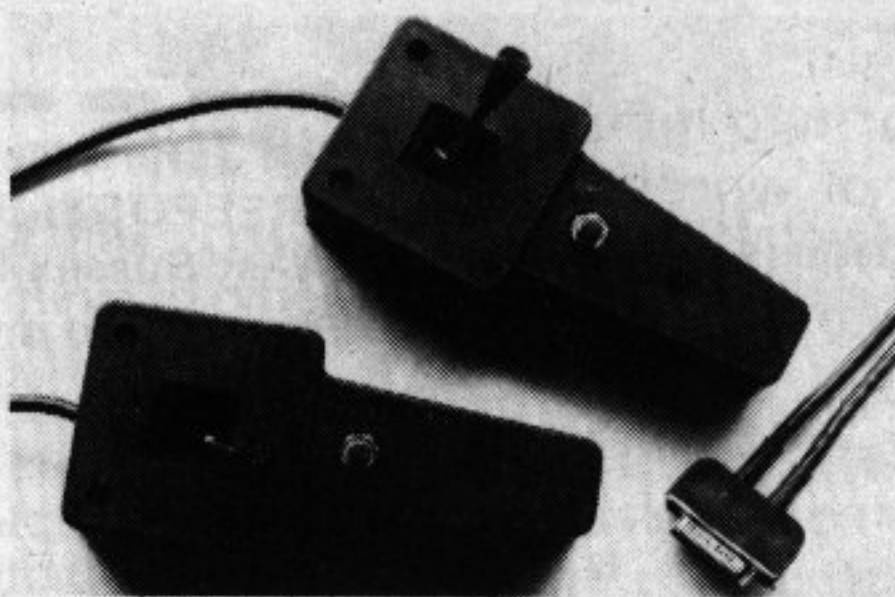

EDUCATIONAL CORNER

(for the 5-11 age group)

THE GARDEN – 3 programs with superb graphics. Covers: colours, spelling and understanding. Cassette £6.95

COUNTING – robots, rockets, flowers, etc. Excellent graphics, good range. Cassette £4.95

MATCHING – 4 programs covering numbers, words, shapes and patterns. Cassette £5.95

COLOUR MATCHING – A superb teaching-aid, using animation techniques in Mode 7. A hit with adults and children alike. Cassette £4.95

And now **SHAPE MATCHING** using the same techniques. This is the second in an integrated approach to teaching.
£5.00

INTRO – A simple programming language which uses the immediate visual response of "Turtle" graphics to introduce a number of programming concepts and techniques. Cassette (and 9 page manual) £7.95

PROGRAMMERS

We are constantly seeking new and interesting programs. Why not send yours for appraisal? Do not worry if the presentation is not to professional standards – we are looking for new ideas and we will advise and assist in bringing your program to the required standard. You have got nothing to lose but much to gain – So why not send your program today? 40 Track disc if possible or two copies on cassette. In some cases we will even provide disc drives against future royalties.

CLARES MICRO SUPPLIES



Dept. BMU9, Providence House,
222 Townfield Road, Winsford,
Cheshire CW7 4AX.
Tel: 06065 51374

All prices inclusive of
VAT + Carriage – No Extras.



A GREAT NEW 3D ADVENTURE FROM BRITAIN'S LEADING SOFTWARE HOUSE!

ESCAPE FROM MOONBASE ALPHA

ONLY £7.95

Fight for your life in this exciting, all action '3-D' graphics adventure. You have been left for dead by your crew members in the vast complex known as Moonbase Alpha. Dash from room to room, up and down stairs and ladders in your attempt to escape. Search for the kindly doctor, somewhere on level seven, and if you have collected enough gold, he will transport you to safety in his time machine. If you think that sounds easy, you haven't bargained for the Green Grappler, Deadly Doris, the Metal Mauler, Demon and Maryin. If you get into difficulties the Wizard is there to help you, and as a last resort, you may take a pill and increase your strength by turning into a Hulk. You may never find your way out, but you will have lots of fun trying!

MOON RAIDER (Model B)

£7.95

As pilot of the highly manoeuvrable Space Fighter you must try to penetrate the defences of the alien moon. Your craft is armed with a rapid-fire laser cannon and a large quantity of the latest Tryex bombs. Against you are self-firing rockets, nuclear Ack-Ack guns, spacemines, 'Fizzers' and meteors not to mention the network of narrow passageways that need to be negotiated. You have only limited fuel which must be replenished by either bombing the enemy fuel dumps or docking with the refuelling station. There are 6 phases to get through and 4 levels of difficulty. The game can be started at any phase and on any level. The controls are either from joysticks or from standard or user-defined keys. A game of the very highest standard.

DANGER! UXB

£7.95

An explosive new, machine code release from Program Power. Based on the popular arcade game, the object of Danger UXB is to run and slide from bomb to bomb, defusing them as you go. Three levels of starting difficulty cater for all levels of player, each level being progressively harder. Every skill level has its own 'Hall of Fame' with scores ranked from poor to master. Excellent graphics and sound, along with great attention to detail (such as the Stomping Boots and Bonus points), make this a very addictive game.

CHES

(Model A £5.95 Model B £7.95)

Our excellent machine code program — now with superbly MODE 1, colour graphics. Six skill levels, play black or white, illegal moves rejected, 'en passant', castling, take-back of moves, and include Blitz Chess where you must move in 10 seconds, set-up of positions for analysis, replay of a game just played and saving of part completed games on tape. On loading, a 1972 Spassky/Fischer game can be replayed.



DANGER! UXB



CHES



MOON RAIDER



WATCH OUT FOR FELIX

Other programs available: Killer Gorilla £7.95/
Demon Decorator £6.95/Croaker £7.95/
Alien Swirl £6.95/Reversi (A & B) £5.95/
Asteroid Storm £7.95/Laser
Command £7.95/Swoop £7.95/Wall £5.95/
Beebtoe £5.95/Caveman Adventure £6.95/
Labyrinths of Lacoshe £7.95/Adventure £7.95/
World Geography £6.95/Where? £6.95/
Constellation £6.95/Physics £6.95/
Chemistry £6.95/Junior Maths Pack £6.95/
Barrage £7.95/Galactic Commander £7.95/
Timetrek £7.95/Footer £7.95/Poker Dice £5.95/
Filer £9.95/Beebmon £7.95/Draw £9.95/
Disassembler £6.95.

Written any Programs? We pay 20% Royalties
for DRAGON, SPECTRUM, B.B.C. PROGRAMS

Guarantee
THAT ALL OUR ADVERTISED
PROGRAMS HAVE BEEN
COMPLETED AND ARE
READILY AVAILABLE

WE ARE AUTHORISED DEALERS
FOR ACORN ATOM, BBC MICRO
& DRAGON 32

SPECIAL
OFFER

Deduct £1 per cassette
when ordering
two or more

MICRO POWER LTD.
Dept. BMU10
8/8a REGENT STREET,
CHAPEL ALLERTON,
LEEDS LS7 4PE
Tel: (0532) 683186 or 696343

All prices inclusive of VAT. Please add 55p
per order Post and Packing.



Please note: All programs are available at all good
dealers or direct from MICRO POWER LTD.

*Now also available at selected W.H.Smith stores

ALL LEADING TITLES
WILL BE AVAILABLE
FOR THE NEW
ELECTRON

DISK DRIVES FOR THE BBC AT THE BEST PRICE



FIRST TIME EVER. INCLUSIVE PACKAGES AT EXCLUSIVE PRICES.

100K standard 5¼in. single sided (including casing, cabling and DMFS) – £239.95

400K 5¼in. slimline double sided (including casing, cabling, disk interface and DFS kit) – £389.95

800K 5¼in. double sided (including casing, cabling, disk interface and DFS kit) – £649.95

All prices are inclusive of VAT and every drive comes with a free disk.

The greatest problem for most BBC users is that they cannot afford a disk drive to make the best use of their equipment.


But our prices put disk drive ownership within reach. Which is particularly good news for the enthusiasts who would never have dreamed of getting their hands on 400K or 800K.

And then there is the DMFS disk filing system which will cost you only £45.95 if bought with one of our disk drives.

Normal price is £91.95! Or £138 with interface!

It should be obvious now that doing business with PaperLogic means a great deal.

Dealer, educational and government enquiries are welcome.

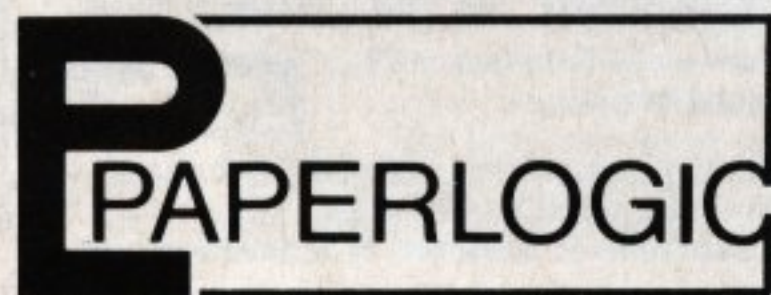


PaperLogic Limited,
12 Nottingham Place, London W1M 3FA.
Telephone: 01-935 0480. Telex: 295043.



SEE US ON STAND No440
AT THE PCW SHOW.

SIR ROM BOARD

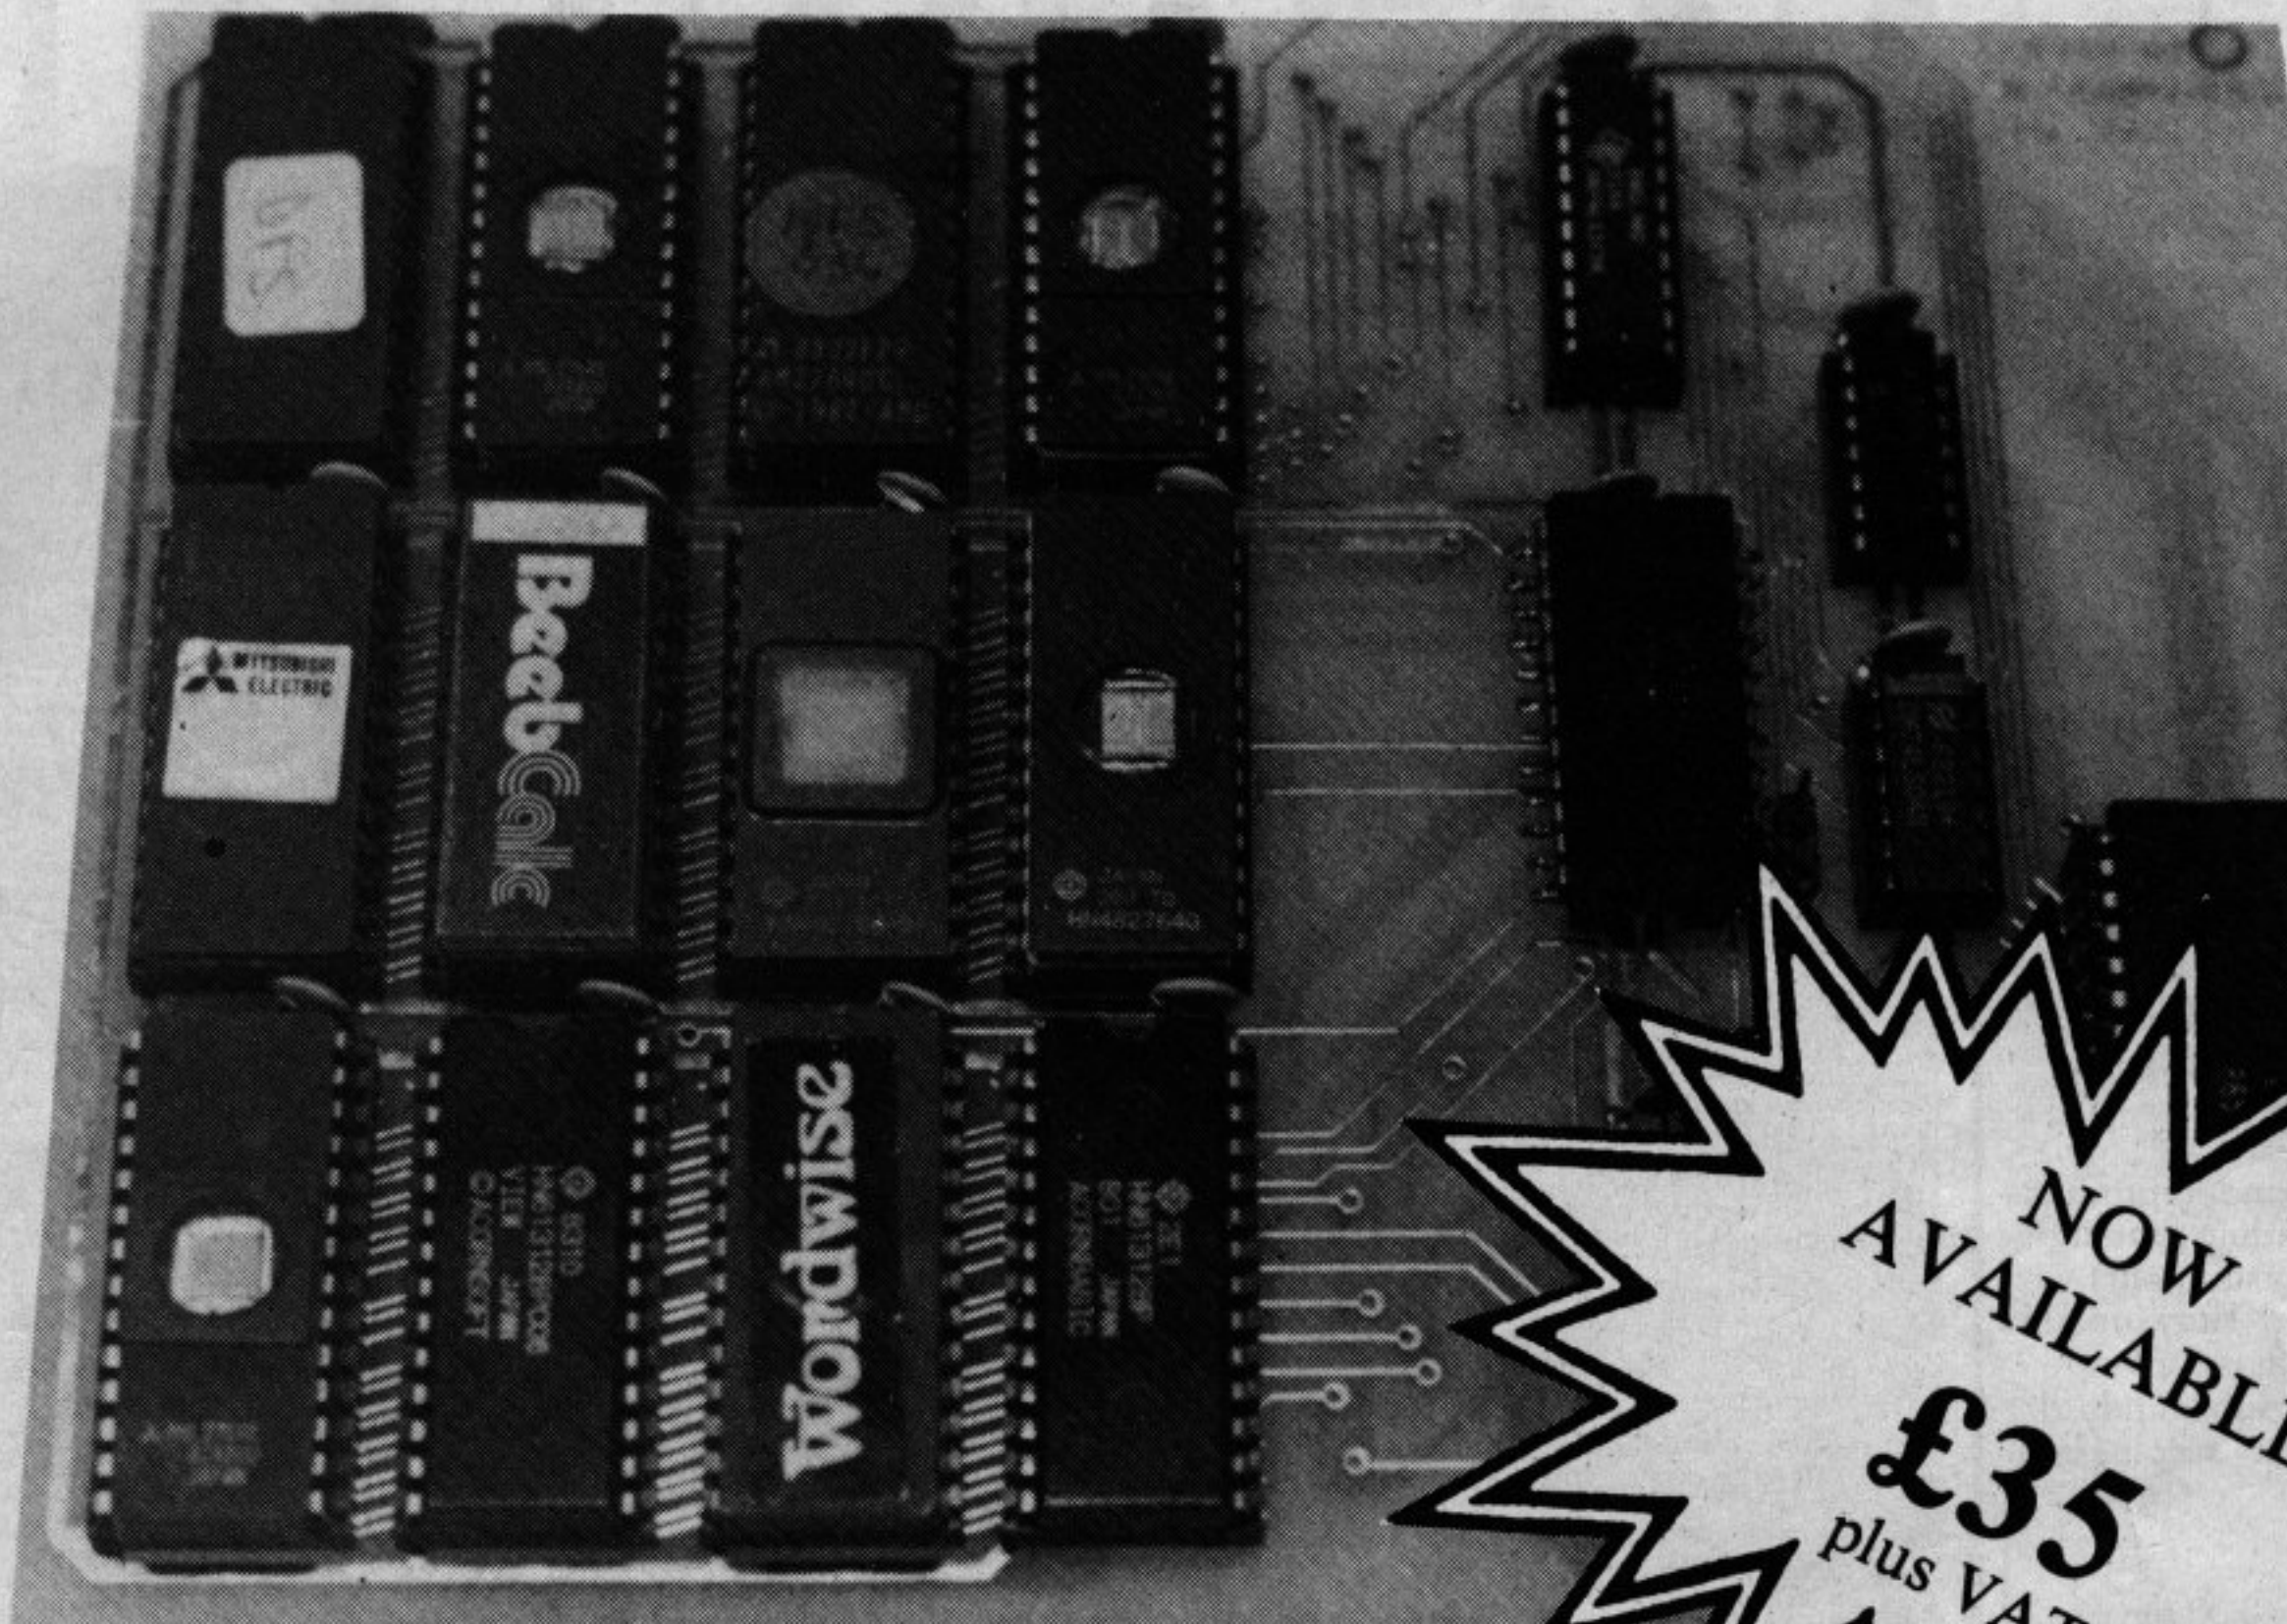

the ROMboard for the BBC micro

- * 12 extra sockets allow up to 192K of ROM space.
- * Easy installation, just plugs in, no soldering required.
- * Fits snugly inside BBC case — only 7" x 5".
- * Write or ring us for full details. Price £35 plus VAT.
- * ELECTRON:
We have a range of hardware add-ons available for the Acorn Electron including A to D (joystick) port, printer interface, ROM Board and Teletext (Mode 7) adaptor.
- * We also stock a complete range of BBC and Torch hardware and software.

Plus £1 postage and packing.



Sir Computers Ltd
91 Whitchurch Road,
Cardiff
Telephone (0222) 21341

If you think our prices are keen, wait 'til you try our service.

“I was pleasantly surprised to receive your parcel yesterday only 2 working days after I first wrote to you – not many suppliers in the small computer market manage such a fast turnaround time.”

J.L., London

Prices: all prices exclude V.A.T. and carriage. Please add these to your order.

Quality:

We only sell prime branded products from the industry's leading manufacturers such as Texas Instruments, Motorola, National etc. They are all current production with recent date codes. We do not buy sub standard products, manufacturers surplus or job parcels.

Service:


All orders received by 3.30 pm are despatched that same day by 1st class post or Datapost, stock permitting. Better than 95% of the product range is in stock in depth at any one time.

Reliability:

All systems products are fully tested before despatch and are guaranteed to be in good working order. All faults reported are fully investigated and promptly put right. Investigation has revealed that the vast majority of these faults have occurred as a result of damage caused in transit.

Value for Money:

Due to our bulk buying power and low overheads we are able to offer very attractive prices for even modest quantities. A straight comparison of our price list with any franchised distributor will reveal a huge difference – in some cases our price is a third of the competition. There are no minimum order charges and our post and packing costs are actual costs. In addition we frequently have special purchases and we always pass the benefit of these reduced prices onto our customers.

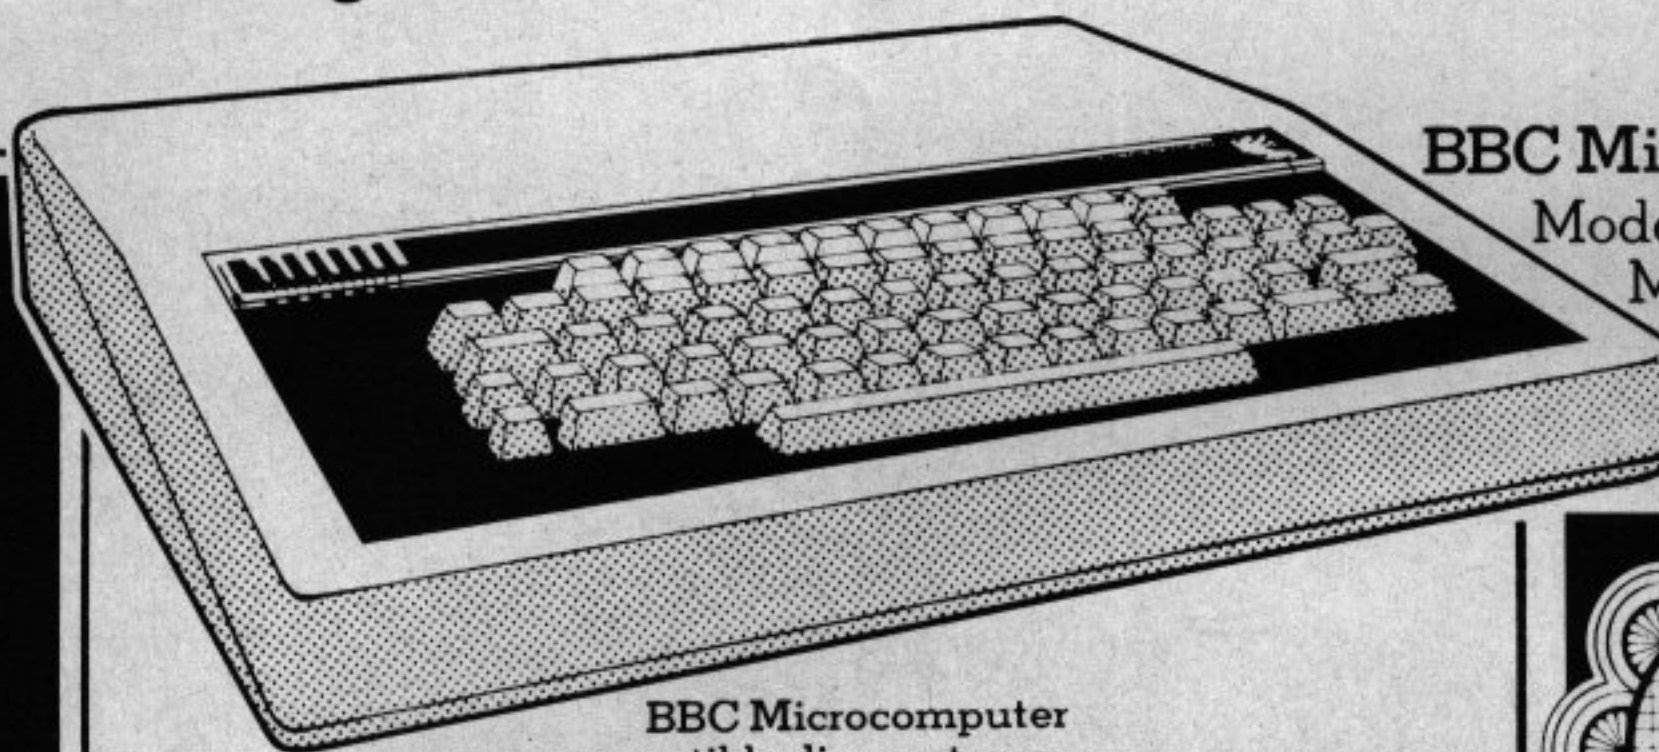

BBC Microcomputers

Model B £346.95

Model B fitted with disc interface £431.95

Carriage £7.50

BBC Microcomputer compatible disc systems

Capacity	Uncased £	Sgle. cased £	Dual cased £
100k (40 track)	140.00	175.00	315.00
200k (40 track)	195.00	225.00	420.00
400k (80 track)	240.00	285.00	525.00
carriage	3.00	5.00	5.00

All cased drives supplied complete with cables utilities disc and manual. 400k drives are 40/80 track switchable.

Single cased drives may be upgraded to the dual configuration by the addition of the appropriate mechanism.

Box of 10 discettes

single sided 40 track	£15.00 + £1.00 p&p
double sided 40 track	£25.00 + £1.00 p&p
double sided 80 track	£32.00 + £1.00 p&p

Utilities disc and manual

(specify 40 or 80 track) £14.50 + £0.50 p&p

BBC Microcomputer upgrade kits

All kits include full instructions. Fitting service available.

post & packing	£ 0.50
Disc interface kit	84.95
Speech synthesis kit	47.82

BBC Microcomputer Firmware

post & packing	£ 0.50
1.2 Operating System	10.00
Basic 2	15.00
View	52.00
View printer drivers (cassette)	8.65

BBC Microcomputer Econet system

Model B fitted with Econet interface	£ 387.82
Model B fitted with Econet + disc interface	472.77
Level filesaver on disc	86.09
Printer server firmware	42.61
Clock box	39.13
Terminator box	30.43
Econet upgrade kit	60.86
Note:	
Econet systems require a dual disc drive (2 x 400k)	
Installation service available	
Cables and connectors supplied to order	

BBC Microcomputer compatible printer

Epson FX80	£ 387.00
carriage	10.00
Box listing paper (2000 sheets 9.5 x 11.5)	13.00
carriage	3.00



BBC Microcomputer connectors and cables

post & packing	£ 0.50
BBC21/A Printer cable including Amphenol connector	13.00
BBC21/B Printer port connector & 36" ribbon cable	3.24
BBC22 User port connector & cable	2.46
BBC23 Cassette recorder cable (2 x 3.5mm + 1 x 2.5mm jacks)	3.50
BBC24 7 pin din plug (cassette int.)	0.60
BBC25 6 pin din plug (RGB output)	0.60
BBC26 5 pin din plug (serial I/O)	0.60
BBC27 5 pin din plug (econet int.)	0.60
BBC35/S Disc drive data cable (single drive)	8.50
BBC35/D Disc drive data cable (dual drive)	12.50
BBC36/S Disc drive power cable (single drive)	3.20
BBC36/D Disc drive power cable (dual drive)	3.50

BBC Microcomputer Software on cassette and disc

Please send for full list of software available by leading suppliers including Acornsoft, Program Power, Superior Software etc.

“Thank you for your prompt, helpful service.”

J.W., Langley, Berkshire

“I am impressed with your quick and efficient service.”

R.N., Peterborough

BBC Microcomputer compatible monitors

Microvitek 14" RGB Colour monitor	£ 249.00
NEC High resolution green phosphor 9"	129.00
NEC High resolution green phosphor 12"	139.00
*NEC monitors are ideal for word processing carriage	£10.00

BBC Microcomputer accessories

post & packing	£ 1.00
6502 Second processor	170.00
280 Second processor	POA
Teletext adaptor	195.65
carriage	5.00
Pair of joysticks	11.30

“Fantastic service- I wish more people were as 'on the ball' as you are.”

T.P., Tiverton, Devon



FOR FAST, IMMEDIATE SERVICE YOU CAN TEL. YOUR ORDER TO: DISS (0379) 898751

Midwich

EAST ANGLIA'S LEADING SUPPLIER OF MICROCOMPUTERS AND COMPONENTS TO EDUCATIONAL ESTABLISHMENTS.

Rickingham House, Hinderclay Road, Rickingham, Suffolk IP22 1HH. Telephone Diss (0379) 898751



For more information about the hardware and software available send for our **FREE CATALOGUE**

Post to: Midwich Computer Company Limited, Rickingham House, Hinderclay Road, Rickingham, Suffolk IP22 1HH.

Name _____

Address _____

Postal Code _____

Telephone _____

BMU

The height of compatibility



↑
£209
 SINGLE DRIVE
 WITH PSU

↓
£373
 DUAL DRIVE
 WITH PSU

STANDARD INTERFACE COMPATIBLE WITH: BBC[™] MICRO+TRS 80[™] + VIDEO GENE[™] + NASCOM[™] + + + +

Canon

MDD $\frac{2}{3}$ Height 5 $\frac{1}{4}$ " Mini Floppy Disc Drives

DRIVE MODEL

PRICE (Inc. V.A.T.)

	Naked	Single Drive Boxed	Single Boxed with power supply	Dual Drive Boxed	Dual Boxed with power supply
MDD 110 (SS 40TK)	£163	£187	£209	£348	£373
MDD 210 (DS 40TK)	£209	£233	£255	£440	£465
MDD 220 (DS 80TK)	£290	£323	£345	£611	£635

Prices on additional items (inc. V.A.T.)

Ribbon/Data Cable to Single Drive £11. Ribbon/Data Cable to Dual Drive £16. D.C. Cable for BBC Micro £7. Utilities Disc & Manual for BBC Micro[™] £20. N.B. The MDD 220 is selectable 40/80 TK with L.E.D. mode display. Boxed units are fitted with an external 40/80 TK switch. U.K. carriage on any size of consignment £10.

Lower Profile,

Higher Performance & More Data Capacity

The MDD range of floppy disc drives includes units giving capacities from 250K unformatted (MDD 110) to one megabyte of unformatted data (MDD 220). They support both MFM and FM recording formats and incorporate the superior reliability, maximum performance and extended service life inherent in all Canon products.

DISC DRIVE UNFORMATTED CAPACITIES

Drive Model	Single Density (FM)	Double Density (MFM)
MDD 110	125K	250K
MDD 210	250K	500K
MDD 220	500K	1000K

Dealer enquiries welcome



MDD SINGLE/DUAL BOXED & PSU.



ALPHA DISC LTD

UNIT 2, CRABTREE ROAD, THORPE INDUSTRIAL ESTATE, EGHAM, SURREY TW20 8RN.

TELEPHONE: (0784) 35357/8/9

SPECIAL OFFER!
Deduct £1 per cassette or disc when ordering 2 or more.

THE BEST BBC MICRO SOFTWARE

PRODUCED BY AN INDEPENDENT SOFTWARE HOUSE

— TOP QUALITY MACHINE CODE PROGRAMS —

BBC



HUNCHBACK (32K)

£7-95

An excellent version of the arcade game where Quasimodo attempts to rescue Esmeralda. Beautifully detailed animation (the best we've yet seen!) as Quasimodo leaps over the ramparts dodging rocks and arrows, swinging on ropes, avoiding the guards' spears, and ringing the bells. Twelve different screens of action, starting easy and becoming extremely difficult. Choice of starting speed and skill level. A programming masterpiece! (For use with KEYBOARD or JOYSTICKS).

... BEEBUG MAGAZINE



Q*BERT (32K)

£7-95

A great new arcade game reaches the BBC micro. In this game, you have to move over a pyramid of blocks altering the colour of the blocks as you pass over them. Easy! Except that you have to avoid the balls, which tumble down towards you, and the pyramid's snake, which has a deadly sting. Transportation discs can be used to help you in your increasingly difficult task. Sound effects, hi-score, rankings, skill levels.

... NEW RELEASE ...




CENTIPEDE (32K)

£7-95

Incredible arcade type game featuring mushrooms, snails, flies, spiders, and the centipedes of course. Excellent graphics and sound. 6 skill levels, hi-score, rankings, bonuses, and increasing difficulty as the spiders become more lively and the number of mushrooms increases.

(For use with KEYBOARD or JOYSTICKS).
"Visually this game compares well with the arcade version, being colourful and clear."
... YOUR COMPUTER

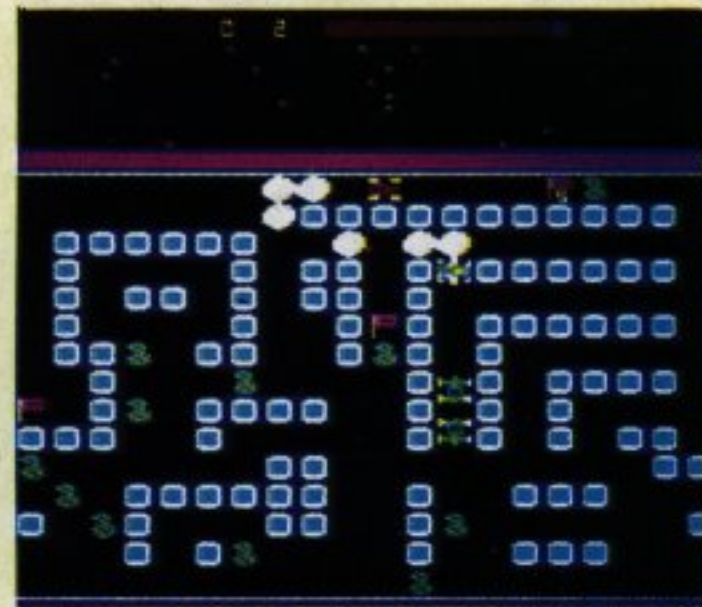

ROAD RUNNER (32K)

£7-95

The only full feature machine-code version of the arcade game available for the BBC micro. Features include: scrolling screen, radar display, checkpoint flags, fuel gauge, smoke screens, 6 skill levels, rankings, increasing difficulty, and sound effects. (For use with KEYBOARD or JOYSTICKS).

"The game becomes very hard and has very smooth graphics. Excellent."
... BEEBUG MAGAZINE




FROGGER (32K)

£7-95

Not just another version of Frogger ... this is the arcade-quality version that you've been waiting to see. Graphically brilliant with gaping-mouthed crocodiles, diving turtles, flies, and frogs that flex their legs as they jump along. Increasing difficulty, and responsive controls.

(For use with KEYBOARD or JOYSTICKS).
"... very good indeed ... fast flicker-free graphics and a frog that really hops!"
... BEEBUG MAGAZINE

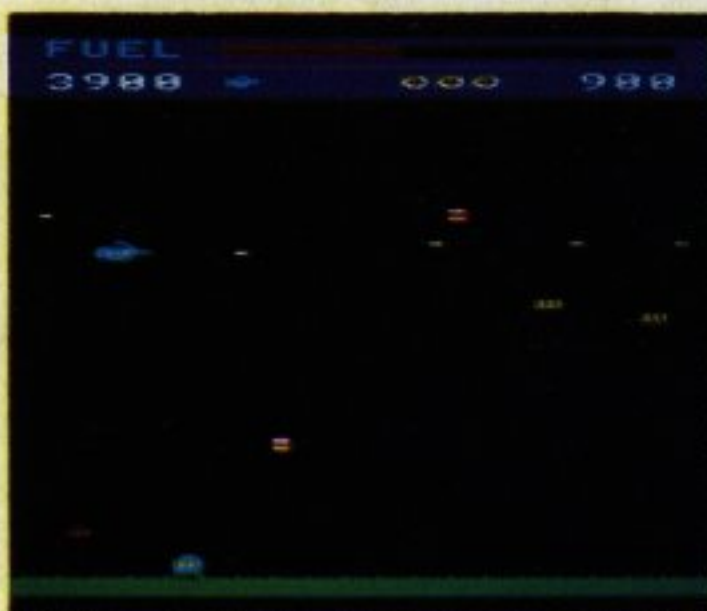

SPACE FIGHTER (32K)

£7-95

Arcade-style game based upon features from DEFENDER and SCRAMBLE. 5 types of menacing alien fire at you and may attempt to ram you. Separate attack phases, fuel dumps, repeating laser cannon, asteroids, smart bombs, hi-score, rankings, 6 skill levels, sound effects.

"A thoroughly enjoyable program, well worth the money ..."
... HOME COMPUTING WEEKLY



ALIEN DROPOUT (32K)

£7-95

Based upon the arcade game of ZYGON, but our version improves upon the original arcade game itself. You have to shoot the aliens out of their "boxes" before the "boxes" fill up. Once full, the aliens fly down relentlessly, exploding as they hit the ground.

(For use with KEYBOARD or JOYSTICKS).
"... these moths are out to get more than the clothes in your wardrobe" ... YOUR COMPUTER



GALAXIANS (32K)

£7-95

Fast action version of the popular arcade game. 4 types of Galaxian (in 3 initial screen formations) swoop down individually or in groups of two or three. 6 skill levels, hi-score, rankings, bonus laser bases and increasing difficulty. Superb sound effects and graphics.

"... well produced, with colourful graphics, responsive controls and the usual bunch of extra terrestrials." ... YOUR COMPUTER



INVADERS (32K)

£7-95

Superb version of the old classic arcade game, with novel enhancements. 48 marching invaders drop bombs that erode your defences, and two types of spaceship fly over releasing large bombs that penetrate through your defences. Increasing difficulty, hi-score, superb graphics and sound.

(For use with KEYBOARD or JOYSTICKS).
"... well produced, with colourful graphics."
... YOUR COMPUTER

DEALERS ... DEALERS ... DEALERS ...

Our software is now available at all good dealers including:

W. H. SMITHS – Selected branches

BOOTS – Selected branches

ELTEC COMPUTERS, 217 Manningham Lane, Bradford.

BUCON LIMITED, 18 Mansel Street, Swansea.

WEST COAST PERSONAL COMPUTERS, 47 Kyle Street, Ayr.

MICROSTYLE, 29 Belvedere, Lansdown Road, Bath.

ELECTRONEQUIP, 36-38 West Street, Fareham, Hants.

BYTEWARE LIMITED, Unit 25, Handyside Arcade, Newcastle.

MICRO MANAGEMENT, 32 Princes Street, Ipswich.

3D COMPUTERS, 230 Tolworth Rise South, Tolworth, Surrey.



FRUIT MACHINE (32K)

£7-95

Probably the best fruit machine implementation on the market. This program has it all ... HOLD, NUDGE, GAMBLE, spinning reels, realistic fruits and sound effects.

"The graphics are very good ..."
... YOUR COMPUTER

COLDITZ ADVENTURE (32K)

£7-95

Can you escape from Colditz with everything you need to get home? Graphics are used at important stages in the game, and a haunting tune plays as you start the quest. A challenging adventure requiring careful logical thought to make your escape.

... NEW RELEASE ...

CRIBBAGE (32K)

£6-95

An impressive version of the card game of cribbage. Play against the computer, and see the scores being pegged onto the cribbage board. Very good graphics, and the computer plays extremely well. Full verification at all stages of play.

... NEW RELEASE ...

PONTOON (32K)

£6-95

Up to 6 players can play against the computer as banker; or you can play individually against the computer, with alternating banker. Very good graphics, and the game features all standard rules, including "splitting pairs".

... NEW RELEASE ...

WE PAY 25% ROYALTIES FOR HIGH QUALITY BBC MICRO, ORIC-1, AND ELECTRON PROGRAMS

SUPERIOR SOFTWARE

Dept. BM10,
69 Leeds Road, Bramhope, Leeds.
Tel. 0532-842714

DISC SOFTWARE AVAILABLE NOW

All our programs are ready for despatch on 40-track discs at £11-95 each.

OUR GUARANTEE

- (1) All our software runs correctly on all current operating systems and BASIC ROMs.
- (2) All our software is available before we advertise.
- (3) All our software is despatched within 48 hours by first-class post.
- (4) In the unlikely event that any of our software fails to load, return your cassette or disc to us and we will immediately send a replacement.

Sprite boosts Basic speed

AT last everyone can write fast-moving, all-action games for the BBC Micro in Basic!

That's the claim of software house DACC. Their latest product, Sprite-Gen, allows you to

control up to 32 multi-coloured "sprites" — creatures rather like user defined characters — and animate them in a manner previously only found in machine code games.

The software comes complete with documentation, including full listings of the two free games programs on tape, which illustrate the way Sprite-Gen can be included in users' own programs.

In a unique move in the software field, DACC have granted permission for other software houses to incorporate Sprite-Gen routines into their programs, provided they are informed, and the use acknowledged.

Iceland opts for Beebs

THE BBC Micro has even reached Iceland. It's been officially adopted by the Icelandic Ministry of Education as the computer that schools should have — in its English version — as it is considered that English is the universal language of computing.

WH Smith takes Electron on trust

No waiting period to see how it sells

start sales of the Electron from Day One.

It is believed that this is the first time a high street network has taken such action.

Until now leading retail organisations have

delayed stocking micro products until market acceptance has been confirmed.

This comes just two months after W.H. Smith's decision to distribute the BBC Micro.

"We are very excited to be the only multiple retailer selling the new Electron", says Stewart Binnie, the merchandise controller of the group's computer section.

"It is a mark of our confidence in the new machine that we are happy to be involved from the first day of its appearance".

A MAJOR retail chain has gone against traditional market trends by starting to sell a micro-computer from day one of its launch.

W.H. Smith gave the green light for more than 100 of its "Computer Know-How" departments in branches throughout the UK to

The chip that spills the beans . .

AN eprom to deter would-be BBC Micro thieves has been developed by Software Services.

On power-up, the chip causes the name, address and telephone number of the computer to be displayed on the screen along with the machine's serial number.

Code

To enter Basic you have to type in an identity code, from which point the machine functions normally.

An additional feature — ideal for those wishing to preserve their work from the depredations of colleagues — is a temporary software lockout. Once activated, the program cannot be accessed until the user code has been entered.



Minister for Information Technology Kenneth Baker at the Concerned Technology Exhibition

NOW BBC MICRO AIDS DISABLED

THE BBC Micro is playing a leading role in a travelling exhibition designed to show how the latest technology can benefit the disabled.

The show has just begun a 27-stop nationwide tour.

Known as "Concerned Technology", it is being funded by the Department of Trade and Industry to help encourage the development of information technology aids for those with special needs.

Opened in Hastings last month, the exhibition is scheduled eventually to wind up in Inverness in

July of next year.

Manned by the disabled — who will also receive on-site training — it will display a wide range of electronic aids.

Each venue has catered specifically for the needs of the disabled, and the exhibition is free.

Opening times at all the locations will be from 10am to 6pm on Fridays and Saturdays and 10am to 4pm on Sundays.

During October, "Concerned Technology" will be in Exeter (October 1-2), Plymouth (7-9), London (12-14), Newquay (21-23) and Milton Keynes (28-30).

EDUCATION CHANGE-OVER AT ACORN

JOHN Coll, perhaps best known among BBC Micro owners as the author of the User Guide, has left Acorn.

Previously manager of Education Services there, he has taken up a post at the Microelectronics in Education project.

This is ironic as his successor, Maurice Edmundson, an HMI with the Department of Education, has been working closely with the MEP project for the past three years.

Respect

He told *Micro User*, "John and myself have been associated for some time in our respective roles. I have great respect both for himself and the work he did at Acorn.

"I won't be taking on all of his responsibilities,

such as the software and the hardware. John will be helping us out with these over the next three months as a freelance lecturer.

"I'm not a second John Coll. I'm Maurice Edmundson and I'll be dealing directly with the school side of things".

With 40 years of experience as teacher, headmaster and then HMI, Maurice certainly brings a great deal of experience to the job. But isn't it all very different from the Department of Education?

Said Maurice, "It's more demanding than I expected, but it really is very exciting".



David Hunt with his Acorn-sponsored Ralt RT3

ROM 'teething problems'

A CARDIFF company has admitted that it is having "minor teething problems" with the new ROM board it recently launched on the market.

However, Sir Computers has no plans to withdraw the 120 units it has already sold or to stop selling before the necessary modifications have been made.

"The board itself is working perfectly but the problem lies in the

supports", says Paul Kathro of Sir's research and development team.

"At the present time, it is resting on its power connectors but we intend to rectify this shortly by introducing a plastic leg".

The extension circuit board has been designed to fit into the BBC case and is capable of holding 12 extra ROM chips. When used in conjunction with the four existing sockets, this provides

256k of memory sideways-paged in blocks of 16k.

To date, only five customers have complained about the problem with the supports and have been offered their money back or promised the modified board as soon as it becomes available.

"We see this as only a minor teething problem", says a company spokesman.

Upgrade doubles memory

A NEW double density disc controller for the BBC Micro has been launched by Microware.

The present controller permits only single density operation. With the new system, a disc which previously held a maximum of 100k will now hold up to 204k.

Additional features include up to 1,500 files on each disc, file names of eight characters plus three characters suffix,

40/80 track switching and a variety of possible disc formats to allow for compatibility with future systems.

Compatible

The system is also claimed to be 100 per cent compatible with the Acorn DFS, using the same memory locations as workspace.

The upgrade requires the new DFS to be in the sideways ROM socket,

plus a piggy-back board, containing three PALS and the new controller, that plugs into the old 8271's socket.

If you have a DFS already, the upgrade costs £79, otherwise it is £99.

★ ★ ★

SALES of the BBC Micro continue to boom. More than 140,000 have been produced and it now represents the majority of micros in schools.

Not what it seems

A NEW software company has come up with what it feels is an appealing package for BBC Micros under a most unattractive name – AIDS.

Fortunately, what SoftSmith of Hersham is offering is not the killer disease, Auto Immune Disease Syndrome, at present striking fear into the hearts of residents of leading American cities.

AIDS – the software variety – is supplied on a single 4k eeprom which can be fitted in 10 minutes to any BBC Micro model A or B, providing it has MOS release 1.0 or greater.

"I realise now that the name will cause a few eyebrows to be raised", admits Brian Smith, the proprietor of SoftSmith.

"But there are a lot of daft names around in the software business at the moment so I don't suppose it matters all that much.

"Let's just hope it catches on – our type of AIDS, that is".

User Guide updated

LATEST book on the market for the BBC Micro is the "Advanced User Guide".


Published by the Cambridge Microcomputer Centre, it is not an official Acorn product, although the authors did get a great deal of co-operation from Acorn.

The 512-page volume supplements the original User Guide, covering both software and hardware.

Details

Included are full details of the assembler, the operating system workspace, paged ROMs, the OSBYTE calls, the 1MHz bus – and almost everything else that wasn't in the original guide.

The book is already causing a huge amount of interest – not least at Acorn, who have ordered 200 copies themselves.

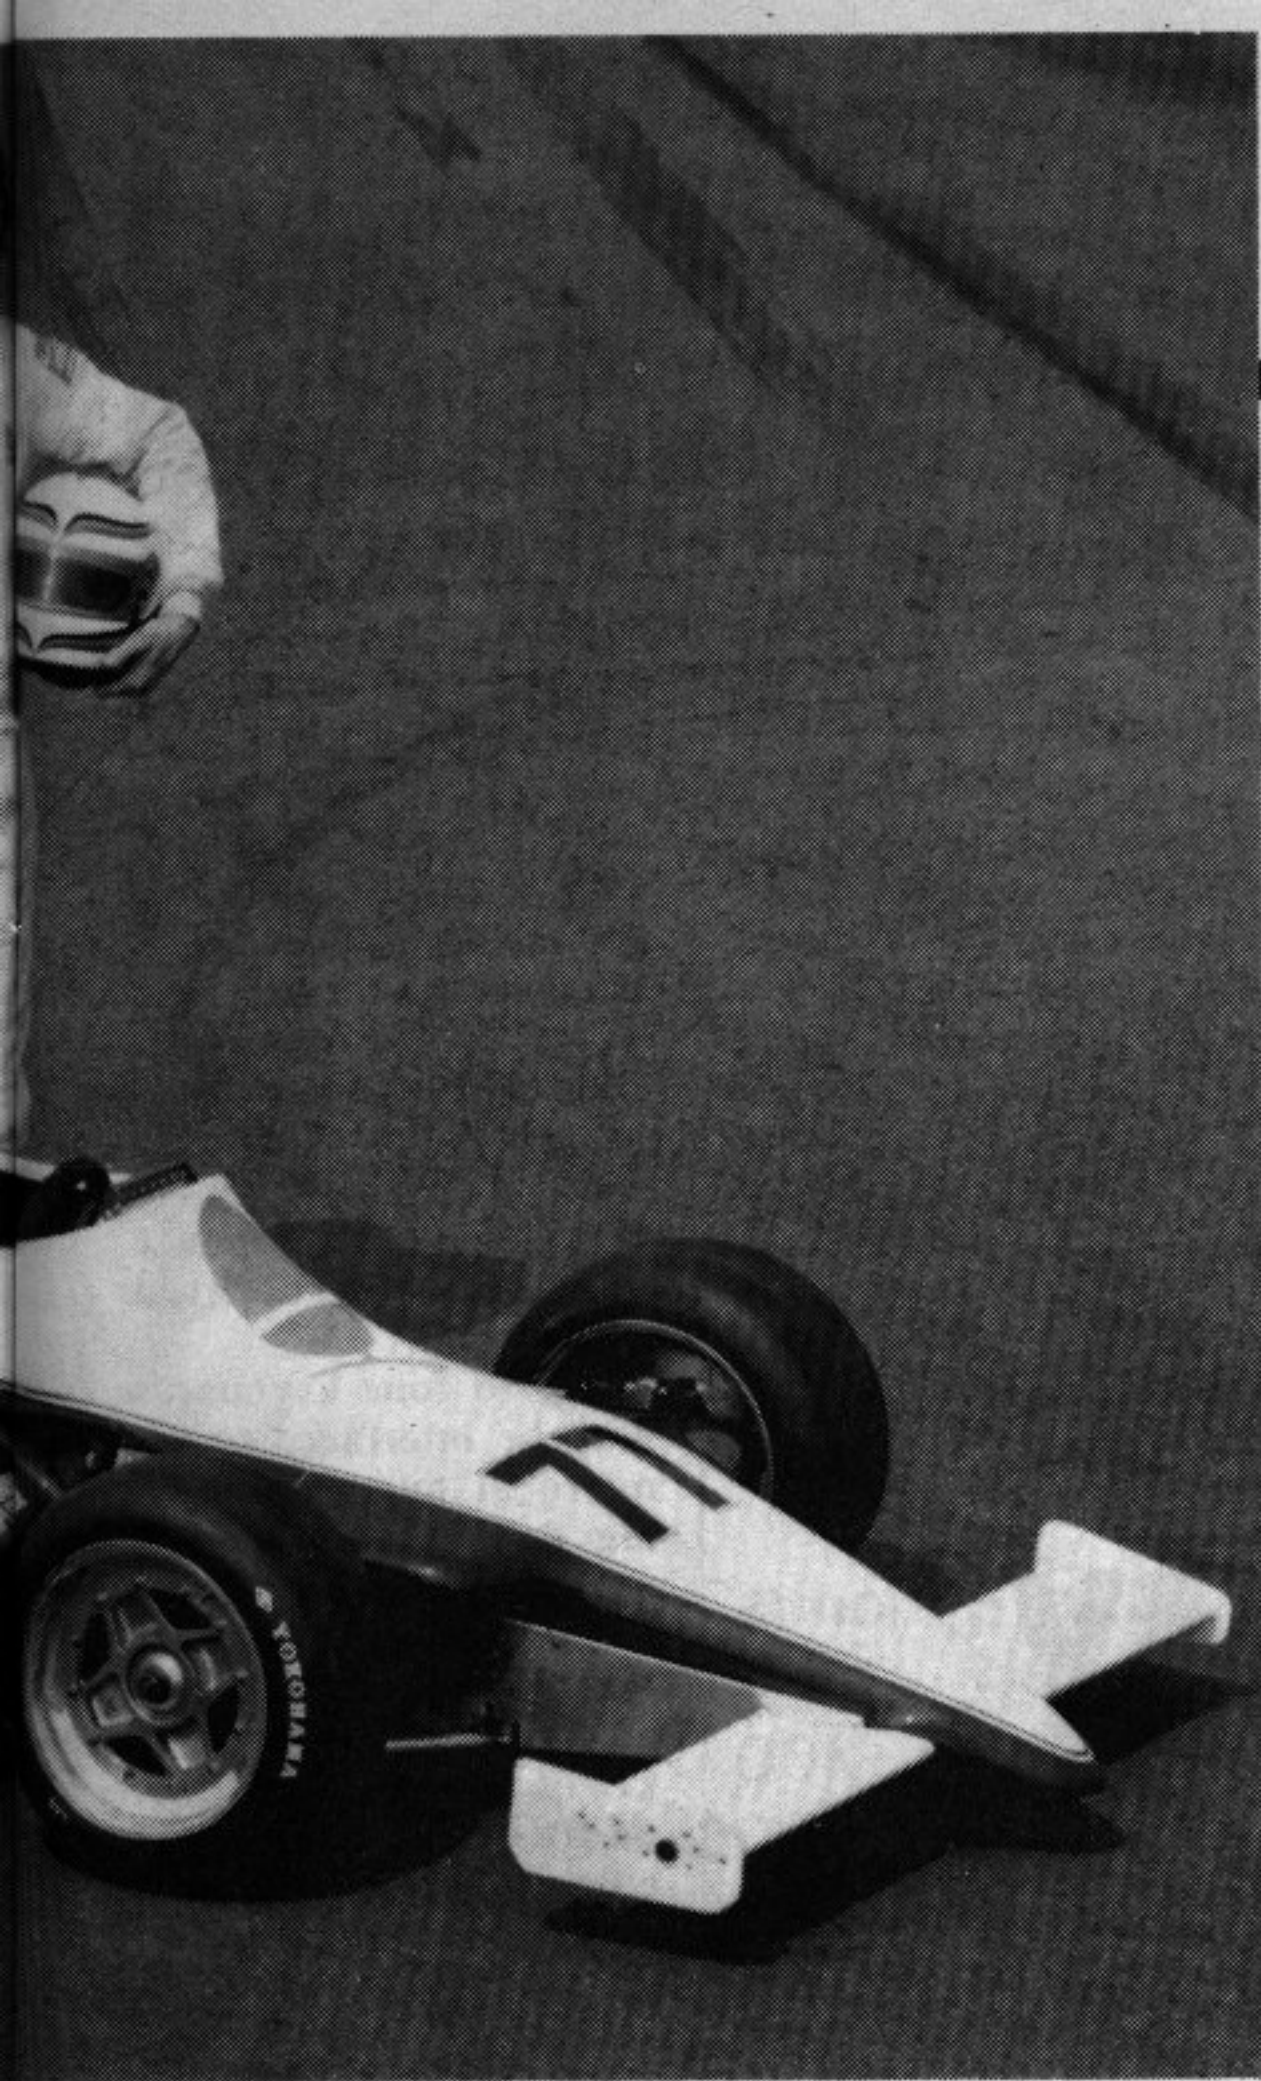

Micros enter Formula Three racing

ACORN Computers have branched out into the world of motor racing.

Not to be outdone by Clive Sinclair's electric car, they will be sponsoring a Formula Three car throughout the next racing season at a cost of £90,000.

Driving the Acorn car will be 23-year-old David Hunt, brother of ex-world champion James Hunt.

Already a success on the motor racing circuit, this year sees his entry into the more demanding

and expensive world of Formula Three racing. Acorn's sponsorship comes at just the right time.

With the car appearing in Acorn livery, the venture has all the hallmarks of a well-planned marketing campaign. Acorn boss Chris Curry, however, points out that one of the chief reasons for the sponsorship was to provide an "exciting diversion" for Acorn staff.

Also, the car's appearance on the racing

tracks of the country fits in well with Acorn's policy of regionalisation.

Acorn aren't just pouring money into the venture. They intend to use their computer expertise to devise a general computer model of Europe's race tracks that will enable the car to be set up optimally for each event.

Promising

So far, David Hunt has had one outing at Silverstone which, while not being a winning performance, was certainly promising.

If you want to see David and the Acorn car in action, you'll be able to catch them at Donington on October 8-9 and at Thruxton on October 23 and November 12.

New look centre for BBC Micro User Show

THE BBC Micro User Show in December will be one of the first major events to be held in the world famous Westminster Exhibition Centre in London following a £500,000 refurbishment programme

that is now under way.

Fifty tradesmen are currently on site working against the clock to complete the facelift.

Originally built for the Royal Horticultural Society in 1904 to hold flower shows – and still

owned by that organisation – the roof had begun to leak and the brick skin deteriorate.

The roof has now been completed replaced, the walls repaired and now extensive interior work is being undertaken.

In the 20,000 sq ft main hall, which is to house the BBC Micro User Show from December 8 to 11, some 16 miles of scaffolding tube and six miles of board were needed to carry out the necessary repairs.

SHARING ADD-ONS

BUSINESS as well as educational users often want more micros but fewer peripherals.

A manual switch box, developed by Softronics, is being marketed as a solution of the problem.

The 3-20 switch links two or three computers.

BASIC II ROM IS COMING

GOOD news for all those who want to upgrade their micros to Basic II. Acornsoft are shortly to release the Basic II ROM.

The price of £15 must represent good value for any language, particularly as full documentation is included.

NEWCOMERS to the BBC Micro now have two new ways of learning to program the machine.

Micromode have devised a "correspondence course with a difference". Not only are students able to monitor their own progress with the aid of self-tests but they also have access to a

tutor via a special "hot line" telephone number.

Micromode feel that this interactive element is vital if true learning is to take place.

Features

The 10-module course, costing £18, is designed to make full use of BBC Basic's special features

and to encourage structured programming.

Alternatively, programming novices can learn programming from the Master Class video training cassettes. Three titles are devoted to the BBC Micro: Starting to Learn Basic, Further Basic and the BBC Micro in Primary Education.

The tapes, lasting about an hour, are intended to give a thorough grounding in the use of the BBC Micro. There is also a video ready on the Electron.

The tapes, costing £19.95, will be on display at the BBC Micro User Show in London in December.

Getting programming taped

Microwriter link with the Beeb

A KEYBOARD claimed to allow you to be touch-typing within an hour has just been interfaced to the BBC Micro.

The hand-shaped, six key Microwriter keyboard is said to be far simpler and more natural to use than the standard typewriter keyboard.

The BBC Micro has been chosen because of its widespread use in

Britain's schools.

Said a Microwriter spokesman: "People are completely conditioned to the QWERTY keyboard, and the reconditioning has to be started with children. Given a choice, children pick the Microwriter."

"With the new keyboard they can write two to three times faster than their own handwriting. Any child can produce neat, well presented work".

Up to four keyboards may be interfaced to the micro at one time, sharing a split screen when necessary.

The basic interface unit, with one keyboard, adaptor and software, sells for £39.50, additional keyboards costing £15.75. Games and educational software are also available.

Acorn in top five

FIVE years after its formation, Acorn Computers turnover has reached £42 million, placing it in the top five UK computer companies along with ICL, Ferranti, Systime and Sinclair.

The company's staff will grow to 400 by mid-1984.

PRESENT HELPS WIN A HONG KONG HOLIDAY

A CHRISTMAS present from his wife has led to David Hubbard of Welwyn Garden City winning the £3,500 holiday of a lifetime for two in exotic Hong Kong.

Kathryn Hubbard gave her husband a BBC Micro last Christmas which enabled him to enter the *Micro User* contest to design a chess board.

But although she provided the key to scooping the star prize, she won't be going along on the dream trip. The couple have three small children - Helen, aged nine months, Louisa, five, and Alice, eight - who will keep her at home.

Instead, David Hubbard will be taking along his 70-year-old father Leslie, a retired horticulturalist, to sample the delights of the Far East.

"We talked about the possibility of winning when I entered - although we didn't hold out much hope - and that's what we had decided", he told *Micro User*.

The computer controller at British Shipbuilders in St Albans,

David Hubbard was left almost speechless when told of his good fortune.

His winning entry was selected from more than 500 received for the contest which offered the most fabulous prize ever offered by *Micro User*.

Now, David and his father will be flown by Cathay Pacific from London to Hong Kong where they will spend five nights as guests at one of the most luxurious hotels in the Far East, the famed Sheraton.

A highlight of the trip will be an escorted tour of the bustling Wong

factory in Kowloon from where thousands of BBC Micros flood out to service the world market.

It took the contest winner 50 hours, working mainly after his family had gone to bed, to come up with the winning entry.

Not that David Hubbard is a stranger to the world of computers. After teaching himself the basics for a number of years, he signed on for a part-time course at Hatfield Polytechnic in 1978, emerging with an MSc in computer science last year.

BARRY WOOD'S TAILPIECE

SORRY about the non-appearance of my column last month. (The rumour I'd been taken prisoner by Acorn was untrue.)

I did actually write my column, then saved it onto disc. The trouble was that I was using one of the new DFS chips and it took so long I missed the deadline.

★★★
IT appears that Acornsoft are going into the business of marketing and distributing other companies' software for them.

Given the difficulties

getting their own products out of them, it seems to me like a case of the blind leading the blind.

★★★
WHAT with this upstart beast the Electron being so wonderful, we can confidently expect that demand will outstrip supply. No doubt some enterprising software house will soon be selling a program to turn BBC Micros into Electron emulators.

★★★
I HEAR that The Micro User was going to print an error trap-

ping program which, when run, would make it impossible for people to make an error when typing in a listing.

They abandoned the idea when they realised that it was so complex that no one would be able to type it in without making a mistake...

★★★
IT'S amazing what you can discover at computer shows. My last visit to one led me to discover Woods' Law which states:

The length of the skirt worn by the girls at any stall is directly

proportional to the quality of the software they're selling.

★★★
IN an effort to prove just how versatile the BBC Micro is, I wrote a series of articles for The Micro User but our editor threw them out.

Is there another editor out there interested in publishing my "Hands-on Approach to Computer Fraud"?

★★★
SO Acorn are sponsoring a racing car are they? Rumour has it that next year they're bringing out a slightly


cheaper version. The pedals are arranged differently - and it goes at half the speed.

Actually, it's quite a good idea to have a racing car. The name Acorn emblazoned on it will probably appear on all the TV screens of the country.


Good luck David. Let's hope you're one of Acorn's 1.2s, not a 0.1.

★★★
I'VE been told that Acorn are going public soon. I think I'll invest some of my hard earned pennies. See you at the shareholders meeting, fellows!

Forget
Cassettes

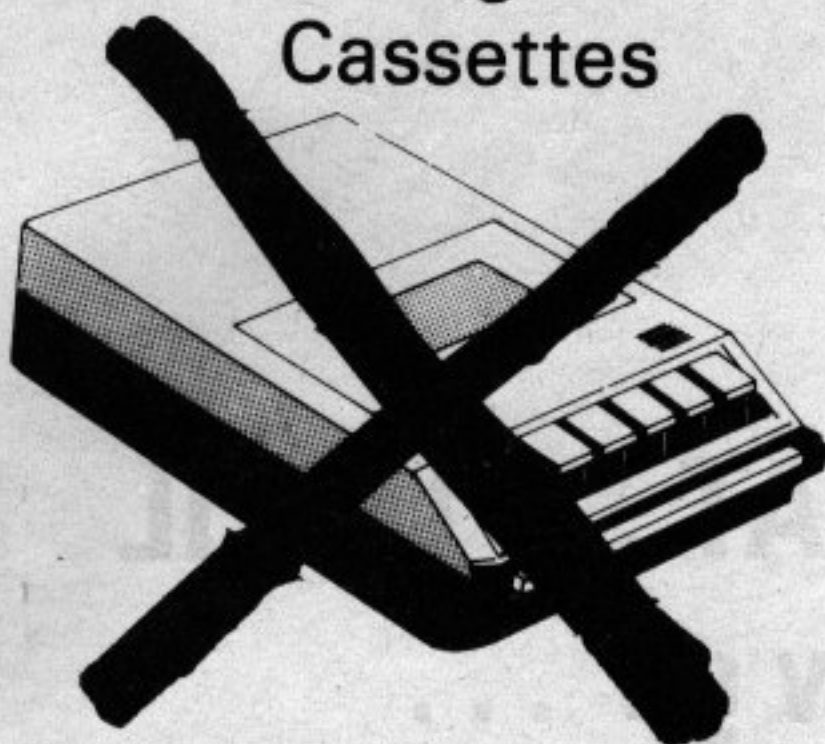

REMEMBER
Disc Drives

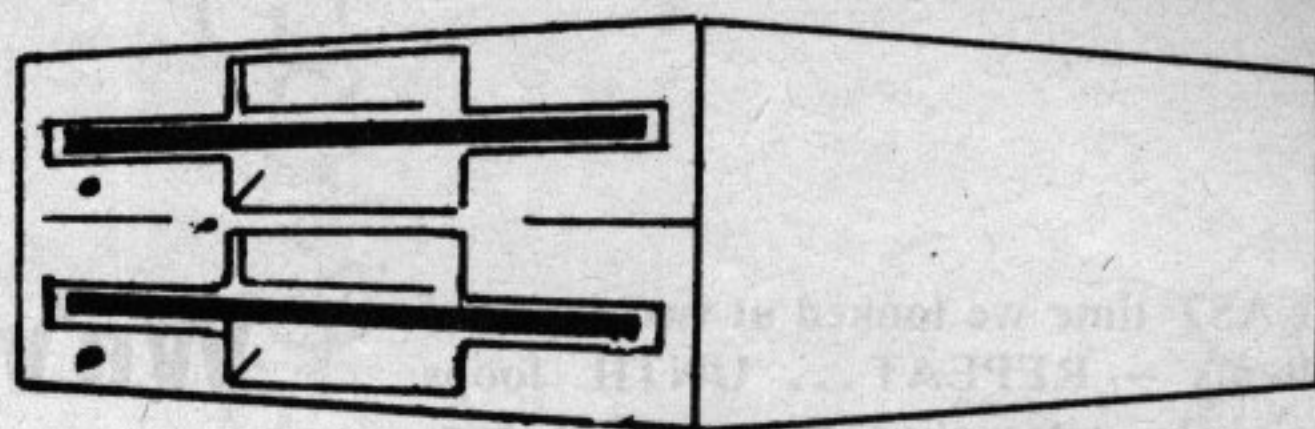

There's only one IMPORTANT name in
Specially Designed Computer Supplies


Viglen
Acrylic Limited



TEACS and Cannon Slimline Drives

Single Drives

★ 40 Track 100K	£166
★ 40 Track 200K	£230
★ 40/80 Track Switchable 200K	£207
★ 40/80 Track Switchable 400K	£269

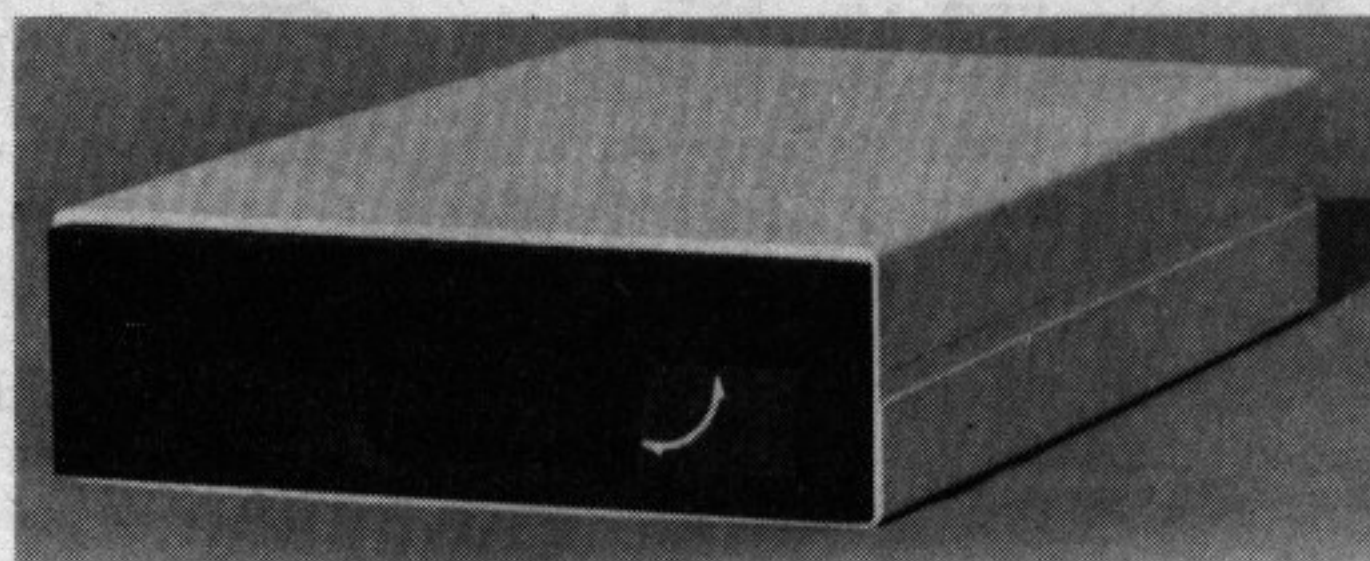

Dual Drives

★ 40 Track 200K	£365
★ 40/80 Track Switchable 400K	£425
★ 40/80 Track Switchable 800K	£550



ALL PRICES INCLUDE 15% VAT —
LEADS & CASE

Free Disc Formatter and Manual. Please add £8 for Special Delivery and packing.



Complete order form and send together with
cheque or postal order made out to:

VIGLEN COMPUTER SUPPLIES,
Unit 7, Trumpers Way,
Hanwell W7 2QA.

Or phone in order with
B/card or Access No.

01-843 9903

ORDER FORM

Please supply

Type and make of drive

Quantity

I enclose cheque/PO for

My Access/Barclaycard No.

.....

Name

Address

.....MU3

Educational establishment orders welcomed.

Part seven of MIKE BIBBY'S introduction to programming

LAST time we looked at two types of loops — REPEAT... UNTIL loops and an alternative that used a conditional statement and a GOTO.

However, if you just want your micro to do something a fixed number of times, there is another kind you can use, the FOR... NEXT loop.

If you have a number of lines of a program that you want repeating, you mark them out by putting the FOR statement at the beginning and the NEXT statement at the end of those lines.

When the BBC Micro reaches a FOR it knows it has a loop on its hands. It will repeat the lines (or code, as the professionals say) between the FOR and the NEXT as many times as needed.

To do this, the micro needs to use a variable as a counter to keep track of how often the loop has been performed.

In our previous loops we've always used a numeric variable for our counter — *number*. Each time the loop was performed we increased *number* by one until we reached our finishing condition.

In a FOR... NEXT loop the variable you use for your counter increases automatically on each repetition of the loop. However, you need to tell the micro where to start and where to finish.

To see how we do this in practice, let's look at Program I, which prints out HELLO 10 times.

```
10 REM Program I
20 MODE 6
30 FOR number=1 TO 10
40 PRINT "HELLO"
50 NEXT number
60 PRINT "GOODBYE"
```

Program I


Lines 30 and 50 mark out the lines we want repeating (line 40). Line 30 reads:

```
30 FOR number=1 TO 10
```

The FOR indicates the beginning of the loop. This is followed directly by the counter variable, in this case *number*. After the '=' sign the 1 to 10 tells the micro to start *number* at 1 and keep on increasing it by one each time the loop is repeated until you get past 10.

The loop is then finished and the

We've tried REPEAT... UNTIL and GOTO, so now go...

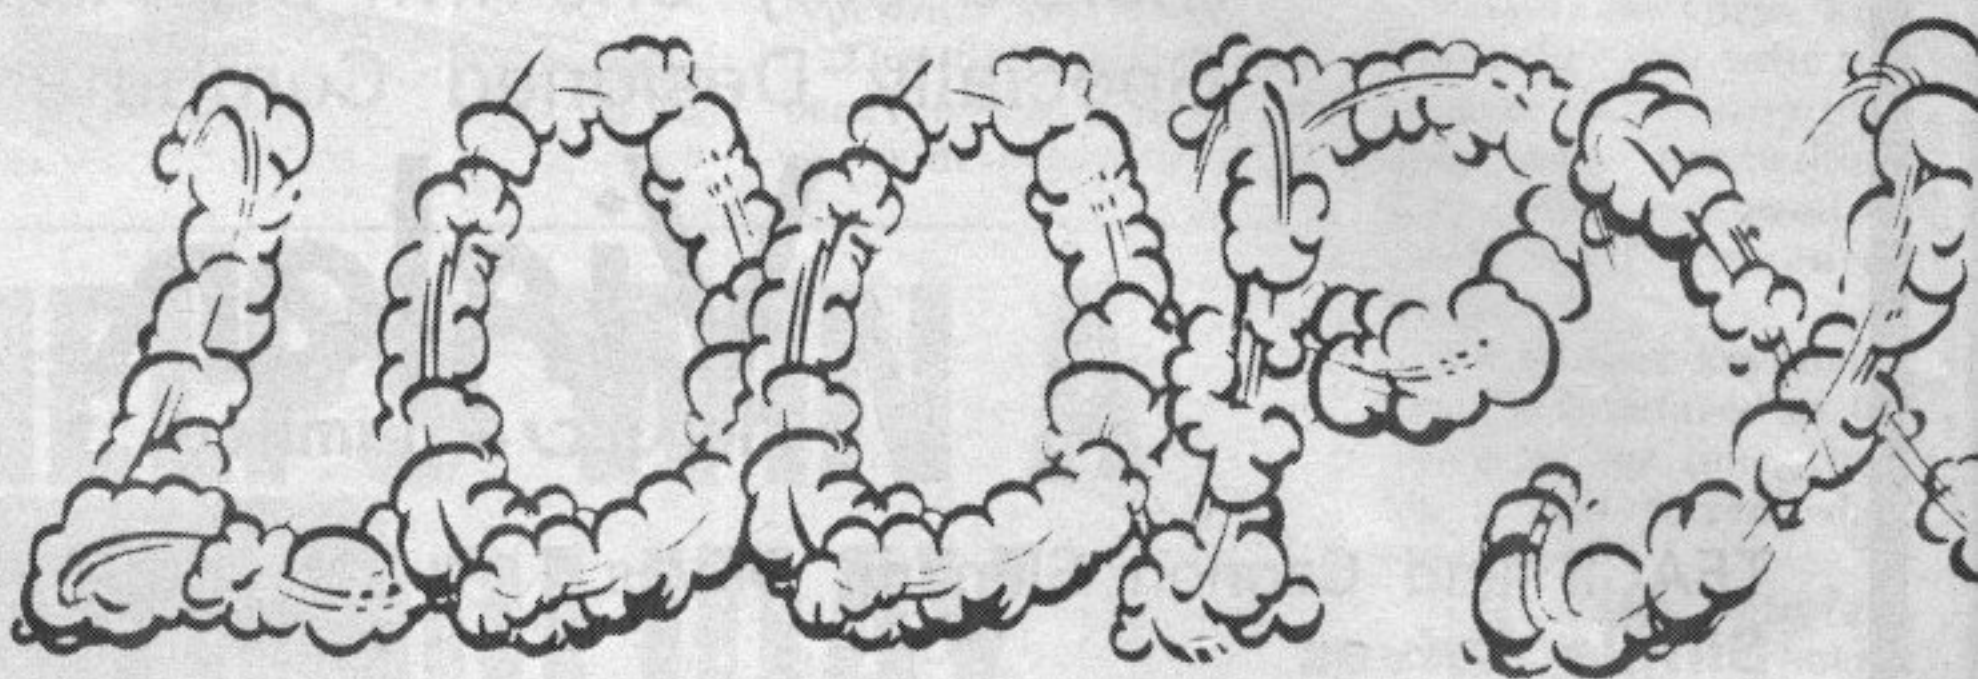

micro carries on with the rest of the program, in this case line 60.

The outcome of all this is that HELLO is printed 10 times followed by a final GOODBYE.

The micro's thought processes go like this:

number=1. Print "HELLO".

Increase number.

number=2. Print "HELLO".

Increase number.

number=3. Print "HELLO".

Increase number.

and so on until

number=9. Print "HELLO".

Increase number.

number=10. Print "HELLO".

Increase number.

number=11. But the loop is TO 10.

So go on to line 60.

Let's learn some jargon:

- *What we've called the counter is, not surprisingly, called the loop variable.*

- *The "limits" of the loop — in this case 1 and 10 — are called the loop parameters.*

- *The lines of the code to be repeated are termed the body of the loop.*

- *When you finish a loop and continue with the rest of the program we say that you have dropped out of the bottom of the loop.*

Notice that we've put the loop variable, *number*, after NEXT in line 60. This isn't strictly necessary (try leaving it out), but if I were you I'd get into the habit of putting loop parameters after

NEXT — they make your program far more readable.

All the above has been a rather long-winded explanation of a simple method of getting the computer to do something a fixed number of times.

Try the following versions of line 30, and keep a careful count of the number of HELLOs you obtain. Are they what you expected?

```
30 FOR number=1 TO 20
```

```
30 FOR number=10 TO 20
```

```
30 FOR number=11 TO 20
```

```
30 FOR number=11 TO 20
```

```
30 FOR number= 0 TO 11
```

Just to warn you of a possible source of future errors, try changing line 30 to

```
30 FOR counter=0 TO 11
```

Assuming that you haven't changed line 50 from the original Program I, you'll get a syntax error message. This is because the loop variable you've specified in the FOR statement (*counter*) doesn't match the one after the NEXT (*number*).


Before we leave Program I, try altering lines 30 and 50 to read:

```
30 FOR number%=1 TO 10
```

```
50 NEXT number%
```

If you run it you'll find it works perfectly with this change of loop variable. However, we aren't just dealing with another character (%) tagged onto the end of a numeric variable — we're using a completely different type of variable, an integer variable.

Integer variables are similar to numeric variables in the sense that they

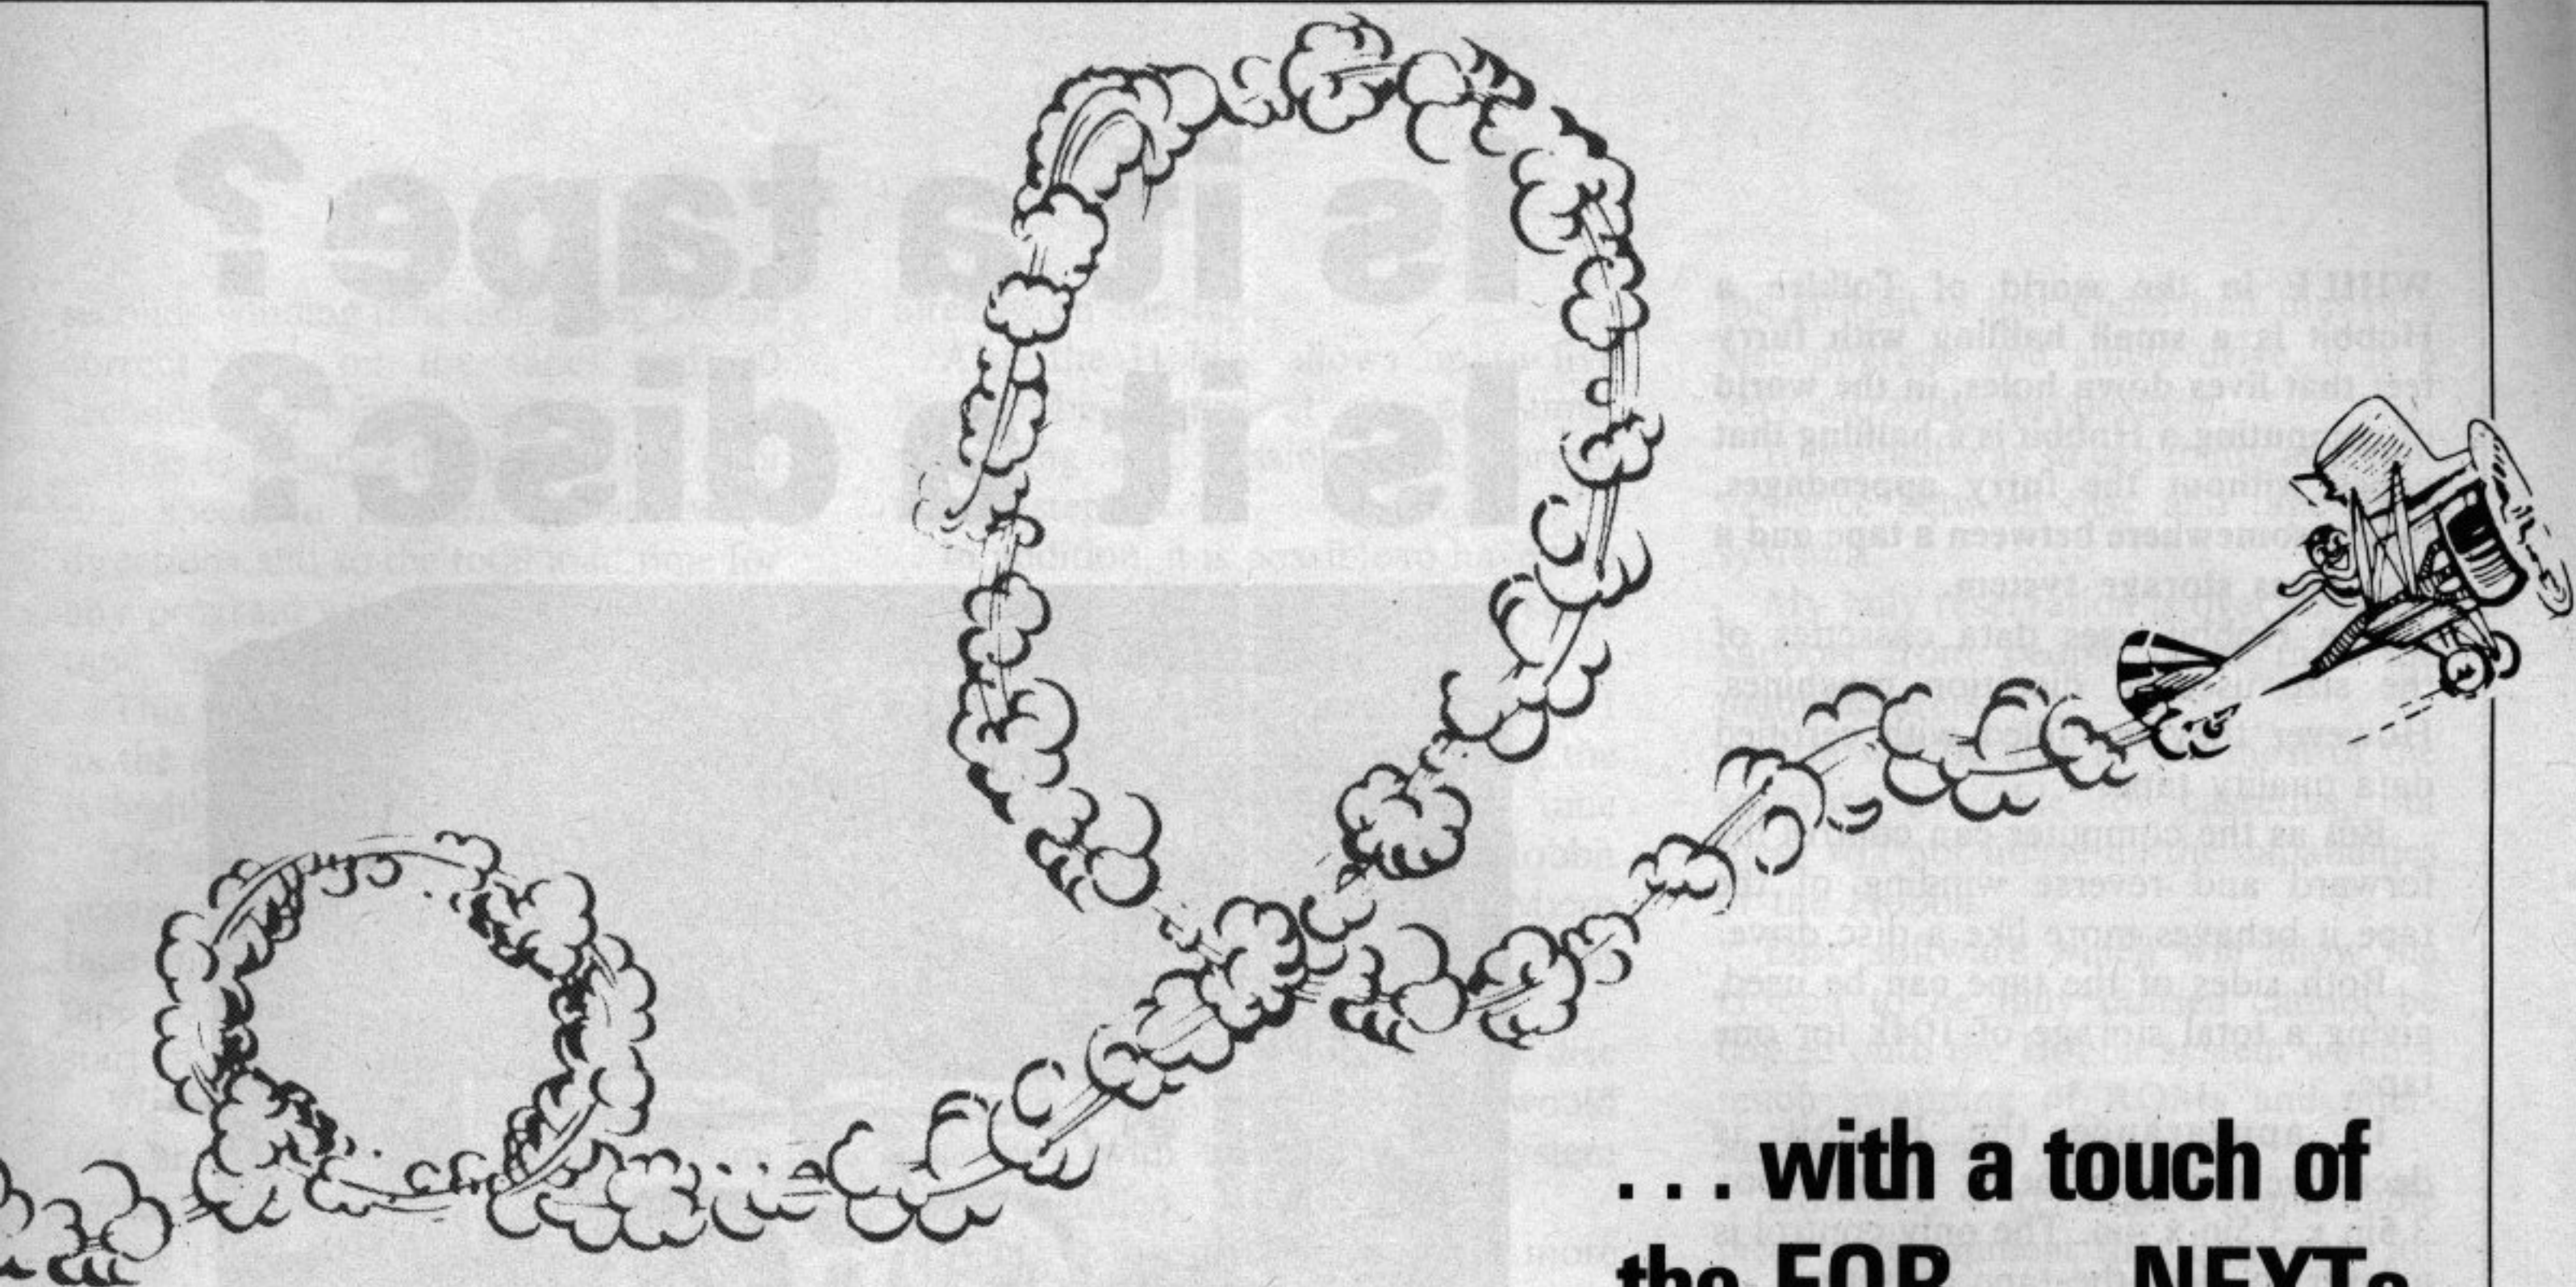

... with a touch of the FOR ... NEXTs

label numbers and we can do sums with them. However, they only deal with whole numbers, not decimals – “integer” means “whole number”.

Just as we used \$ on the end of our label to show that we were using string variables, so we use % on the end of our label to indicate numeric variables.

Now try Program II:

```
10 REM ***PROGRAM II***
20 MODE 6
30 number=5
40 number%=6
50 PRINT"number is ":number
60 PRINT"number% is":number%
70 PRINT"number%/2 is ":number%/2
80 number=7.5
90 number%=7.5
100 PRINT"number is now ":number
110 PRINT"number% is now "number%
```

Program II

In lines 30 and 40 we assign different values to *number* and *number%*. Lines 50 and 60 then print these out, proving that the computer does indeed consider them to be entirely different variables.

Line 70 demonstrates that we can do sums with integer variables, in this case a division.

In lines 80 and 90 we try to assign the value 7.5 to each of our variables. But, as I mentioned above, you can't do this with integer variables, you need numeric variables for handling decimals.

However, the BBC Micro does not throw line 90 out. It simply turns 7.5 into an integer by ignoring the numbers

after the decimal point! In other words, *number%* takes the value 7.

This rather uns subtle approach of ignoring the figures after the decimal point is known as taking the integer part.

(Notice that this isn't the same as the "rounding up" or "rounding down" that you may have learnt at school. The BBC Micro simply turns a blind eye to whatever is after the point and deals with the whole number.)

So why use integer variables instead of numeric, which do sums and are capable of dealing with decimals?

The reason is that the integer variables are far easier to handle, so programs with them in run much faster. Also they take up less of the computer's memory than numeric variables. Use them!

Let's return to loops now. Try Program III:

```
10 REM ***Program III***
20 MODE 6
30 FOR loop%=1 TO 10
40 PRINT loop%
50 NEXT loop%
```

Program III

If you recall, the loop parameter increases by one each time the loop is repeated. In a burst of wild originality I've called the loop parameter *loop%*.

The first time through the loop, *loop%* is 1, so line 40 prints out the value 1. Then *loop%* is increased to 2 since it is the counter, so line 40 prints out 2, and so on.

Once you've worked out what is happening here try adding:

```
60 PRINT loop%
```

The new line prints out the value of *loop%* after the loop has ended. Can you explain the result?

```
10 REM ***Program IV***
20 MODE 6
30 FOR loop%=1 TO 10
40 PRINT loop%,loop% * loop%,loop% *
  loop% * loop% 50 NEXT loop%
```

Program IV


Program IV prints out the squares and cubes of the numbers up to 10. Rather nice isn't it?

Of course, there's no need for you to stop at 10 – try increasing it to 100. That's the good thing about loops – you can get the micro to do a considerable amount with very little coding on your part.

Program V will print out whatever multiplication table you want.

```
10 REM ***PROGRAM V***
20 MODE 6
30 INPUT "Which table do you want",
  number%
40 FOR loop%=1 TO 12
50 PRINT:loop% " multiplied by ":
  number% " is ": loop% * number%
60 NEXT loop%
```

Program V

Finally, can you alter line 40 of Program III so that the output starts with a 10 and decreases to 1? 

WHILE in the world of Tolkien a Hobbit is a small halfling with furry feet that lives down holes, in the world of computing a Hobbit is a halfling that copes without the furry appendages, falling somewhere between a tape and a disc mass storage system.

The Hobbit uses data cassettes of the size used in dictation machines. However they are filled with certified data quality tape.

But as the computer can control the forward and reverse winding of the tape it behaves more like a disc drive.

Both sides of the tape can be used, giving a total storage of 104k for one tape.

In appearance the Hobbit is deceptively simple, being a small box 3.5in x 3.5in x 4in. The only control is a lever to eject the tape cassette.

It comes with ribbon cable for connection to the user port and wire for connection to the auxiliary power supply connector on the BBC Micro.

Its exterior matches the BBC Micro, and it sits neatly on the top of it.

Also included is the Hobbit ROM, which needs to be installed in a specific socket. On my machine the Basic ROM occupied this position and so this had to be moved down a socket.

On powering up you are informed that the Hobbit filing system is installed. You can at any time switch back to the normal tape system with a *TAPE command.

Just like a disc, a Hobbit tape has to be formatted before it can be used. This is the writing of data onto the tape which will act as block headers or compartments in which data can be stored.

Also the directory needs to be initialised to keep tabs of which blocks belong to each program.


This procedure took just over four minutes to complete involving much winding and rewinding of the tape.

If it seems like a long time, remember it will only have to be done once for each of your tapes.

I then set about transferring some programs from the normal tape system into the Hobbit. First was Deathwatch (March 1983 *Micro User*) which took 1 min 35 seconds to load from conventional tape and took the Hobbit 50 seconds to save. When I got the Hobbit to load it back however it only took 20 seconds.

The Hobbit has a *CAT command just like the disc or tape filing system, but it is more sophisticated.

Is it a tape? Is it a disc?

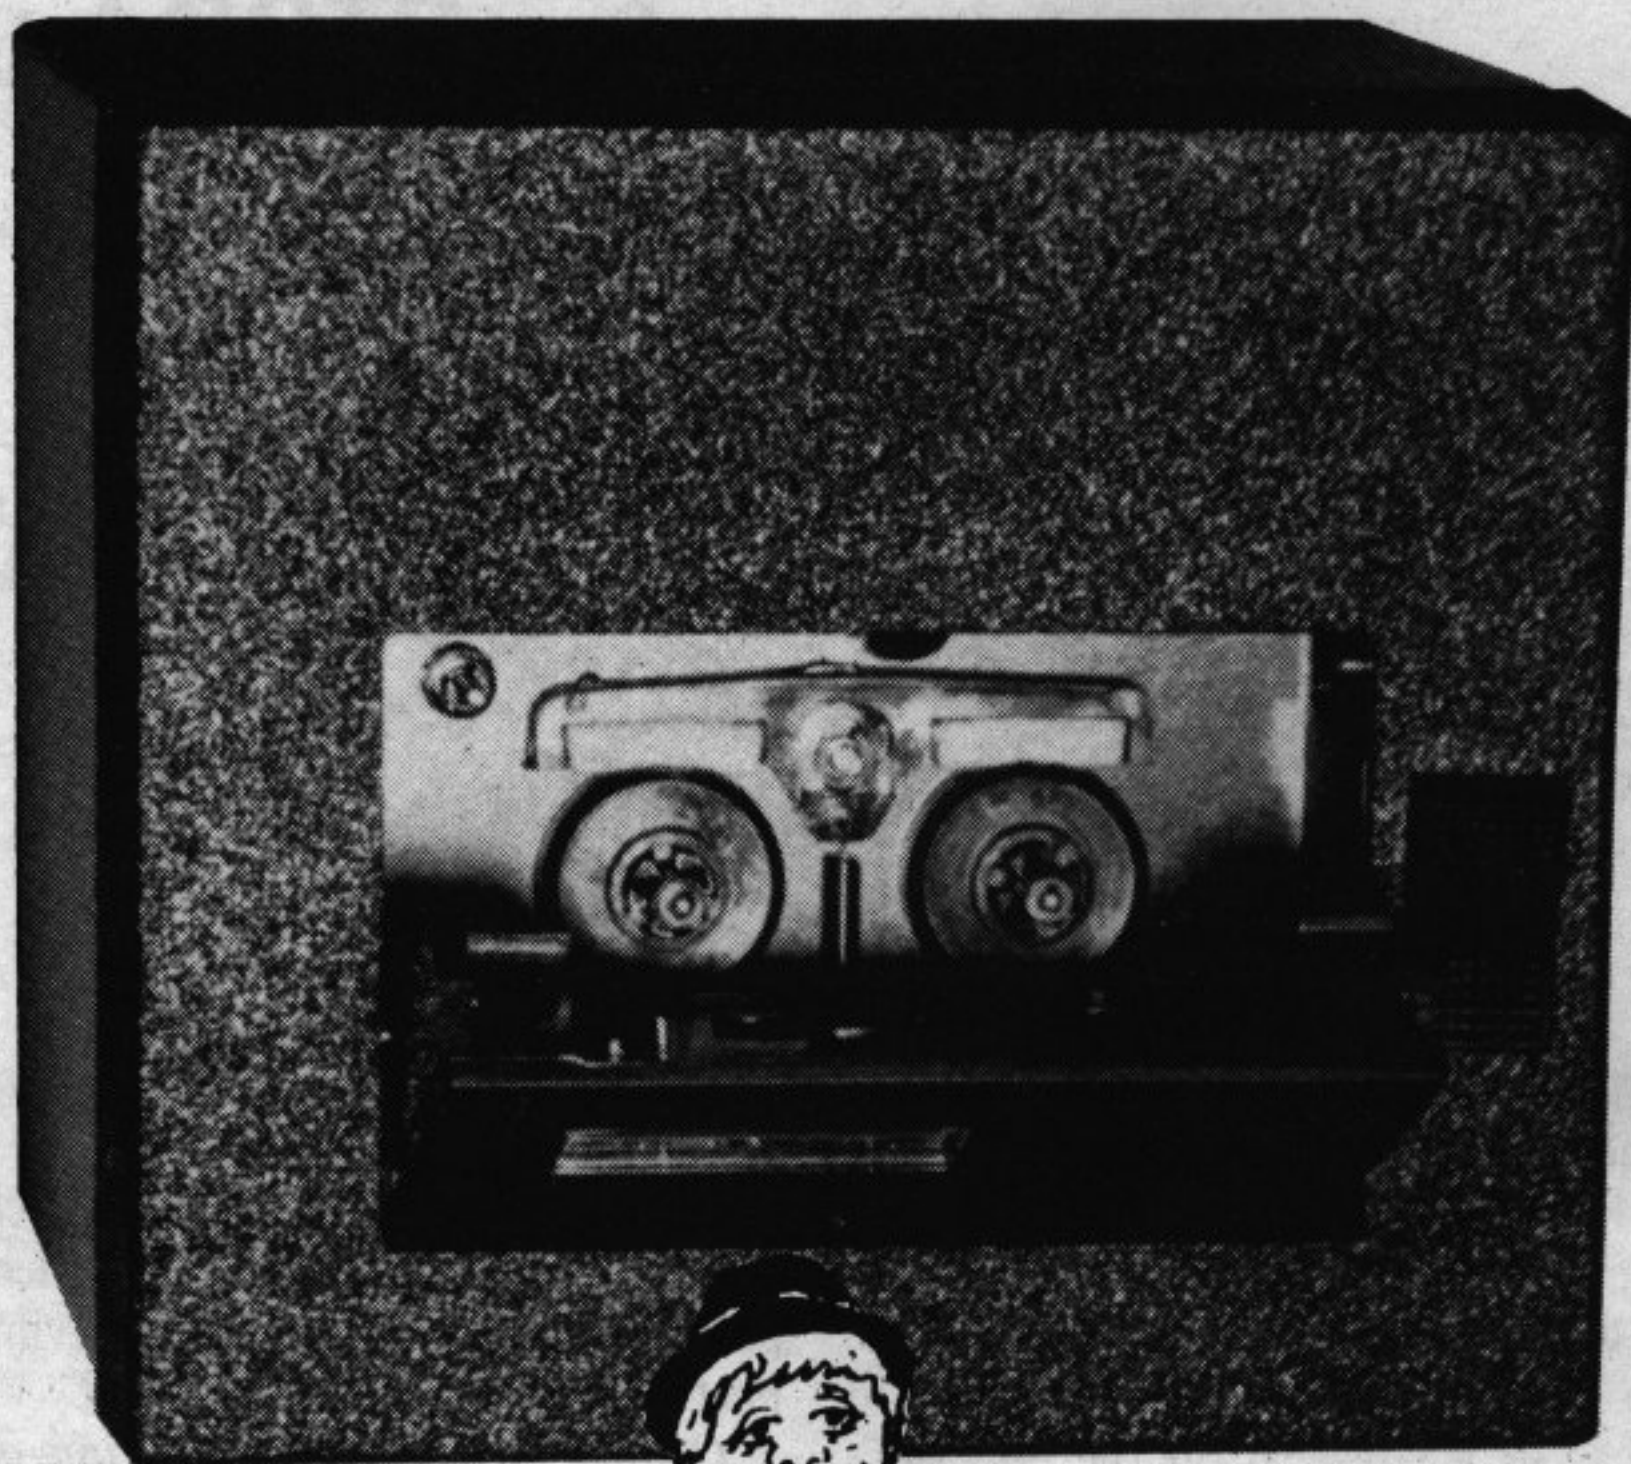

**Reviewed by
MIKE COOK**

No! It's a HOBBIT

As well as "the volume" and a list of all the files stored, you are told how many blocks they take up on the tape as well as the type of file.

In this case "the volume" is nothing to do with loudness but is the name given to the tape during formatting.

Each file in the catalogue (which has

space for 60 files) is given a number. This allows the file to be loaded or chained by typing just its number and one of the function keys, thus saving a considerable amount of typing.

From the catalogue I loaded Deathwatch again, but this time it took 40 seconds to load. This comprised 20

seconds winding time (searching for the correct spot on the tape) and 20 seconds load time as before.

This is because the Hobbit has only one speed in forward or backward directions and so the total load time for any program will depend on where the tape starts from.

This winding time is often referred to as the access time, and on this system is highly variable.

On a conventional tape system the access time involves finding the right tape and rewinding it, then zeroing the tape counter before winding onto the start of the program.

Viewed in this light, the Hobbit is fast and convenient, but when compared to a disc it is painfully slow.

The Hobbit handles files in a much more sophisticated way than the Acorn disc filing system.

It uses what are known as "File Control Codes", careful use of which allows several different options when saving a file of the same name as one

already on the tape.

Also the Hobbit allows up to five files to be opened at any one time, something not possible with normal tape systems.

In addition, it is possible to have two Hobbit drives connected at the same time.

When the Hobbit was operating I noticed that any flashing colours on the screen stopped, as did the real time clock. This is because the Hobbit disables the interrupts while the Micro "concentrates" on finding the right place.

I tried to transfer some of my disc files onto the Hobbit but found it would not work with the disc filing system ROM installed.

When in use the Hobbit uses more RAM space than discs, as PAGE is set to 1C00. Some programs are supplied with the Hobbit which enable you to relocate the software needing the extra RAM.

When you consider that the price of

the Hobbit is just under half that of a disc upgrade and single drive, it is a very attractive proposition.

It lies half way in capability and convenience between disc and tape filing systems.

My only reservation is over software support from people other than the manufacturers.

You will be able to use most of the software available for cassettes, but these will not utilise all the capabilities of the Hobbit.

Disc software which will allow the Hobbit to be fully utilised cannot be copied onto the Hobbit system without much swapping of ROMs and intermediate storage on tape.

However, it remains a remarkable piece of equipment that is a must for speed and convenience if you are not thinking of going to the expense of discs.

This little halfling knocks spots off the humble domestic tape recorder for speed and reliability.

The *BBC* Microcomputer Specialists


GUILDFORD COMPUTER CENTRE offers a complete range of Computers for Home, Business and Educational applications.

Large stock of additional equipment available includes:- Printers, Hard/Floppy Disc drives, Monitors etc., for most makes.

An extensive range of Business software (Accounts, Stock, Payroll, Word Processing etc.).


Drop in for a frank discussion and expert advice on your requirements or arrange a demonstration. We give a full and expert backup to ALL our sales.

Stockists of:- BBC/Acorn, Torch, Oric, Olivetti, Hitachi, TRS-80, Commodore, Dragon, Sharp, Sirius, Osborne, IBM, Newbrain, Epson, Seikosha, Cumana, etc.

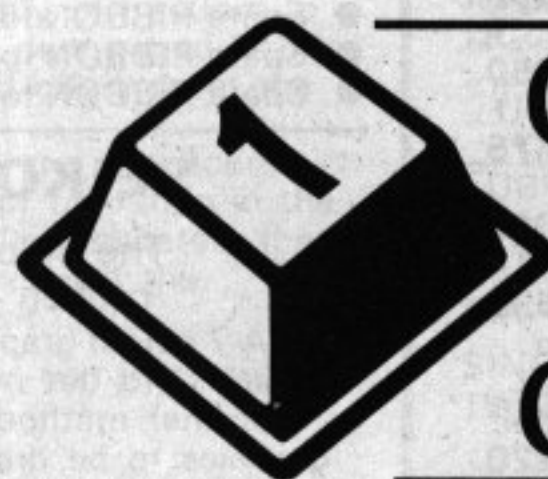

**GUILDFORD
COMPUTER
C·E·N·T·R·E**

1 The Quadrant, Bridge Street,
Guildford, Surrey GU1 4SG
Telephone (0483) 578848

 **commodore**

olivetti

 **ACORN
COMPUTER**

 **HITACHI**

BBC


TRS-80®

WATFORD ELECTRONICS

33/35 CARDIFF ROAD, WATFORD, Herts, England

Tel: Watford (0923) 40588/37774 Telex: 8956095 WAELEC

BBC MICROCOMPUTER

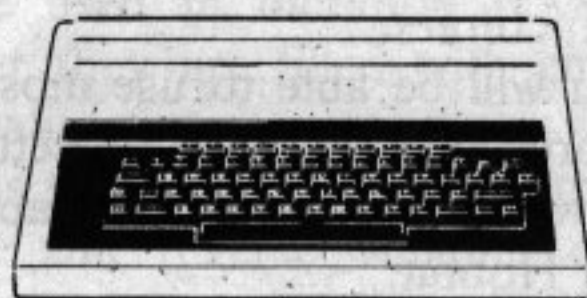

BBC Model A – £260

BBC Model B – £346

Upgrade your Model A with our Upgrade Kits and save yourself £ s s s


- BBC1 16K Memory (8 x 4816AP-3 100nS) **£20.00**
- BBC2 Printer User I/O Port **£6.98**
- BBC3 Disc Interface Kit **£85.00**
- BBC4 Analogue I/O Kit **£7.00**
- BBC5 Serial I/O Kit **£7.30**
- BBC6 Expansion Bus Kit **£6.60**
- Complete Mod. A to B Upgrade Kit **£48.00**

Dust Cover for BBC Micro

Protects your expensive Micro from foreign bodies. **£3.95**

DISC DRIVES (CUMANA)

BBC COMPATIBLE

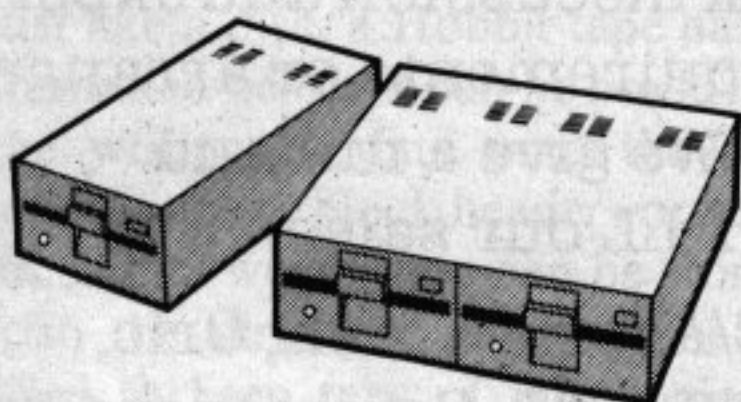

- **New TEAC** Slimline Uncased Drive S/S 40 track, 5 1/4", 100K **£135**
- **New TEAC** Slimline Cased without PSU, S/S, 40 track, 5 1/4", 100K **£155**
- **CS50A – TEAC** Cased with own Power Supply, S/S 40 track, 5 1/4", 100K **£180**
- **CD50A – TEAC** Twin Cased with own PSU, S/S, 40 track, 5 1/4", 200K **£350**
- **CS50E – TEAC** Single Cased with own PSU, S/S, 80 track, 5 1/4", 200K **£250**
- **CD50E – TEAC** Twin Cased with own PSU, D/S, 80 track, 5 1/4", 400K **£475**
- **CS50F – TEAC** Single Cased with own PSU, D/S, 80 track, 5 1/4", 400K **£310**
- **CD50F – TEAC** Twin Cased with own PSU, D/S, 80 track, 5 1/4", 800K **£599**
- **MITSUBISHI** Slimline – Uncased, double density. Double track, 5 1/4", 1 Megabytes, track density 96TPI, track to track access time 3mSec. Plugs directly to BBC Micro. **ONLY £220**
- **SINGLE MITSUBISHI** Slimline – Cased with own PSU, DS/DD, 1 Megabytes. (400k with BBC) **£275**
- **TWIN MITSUBISHI** Slimline Cased with own PSU, DS/DD, 2 Megabytes. (800K with BBC) **£535**
- Single Drive Cable for BBC Micro **£8**
- Twin Drive Cable for BBC Micro **£12**

5 1/4" DISKETTES

- (5 year warranty on VERBATIM Diskettes)
- 10 Verbatim or 3M Diskettes, 5 1/4", S/S **£20**
- 10 Verbatim or 3M Diskettes, 5 1/4", D/S **£30**
- (2 year warranty on WABASH Diskettes)
- 10 WABASH Diskettes, 5 1/4", S/S **£15**
- 10 WABASH Diskettes, 5 1/4", D/S **£25**
- Carriage on Drives **£7**

PLASTIC LIBRARY CASES for Disc Storage

- 5 1/4" (holds 10) **£2**
- 8" (holds 10) **£2.90**

BBC PRINTER

GP100A



10" Tractor Feed, 80 columns, 30CPS
Normal & Double width Char,
Dot res graphics. Parallel Interface standard.
ONLY £175 (£7 carr.)

SEIKOSHA GP250X:

10" Tractor Feed, 80 columns, 60 CPS, normal and double – width/height characters, 128 characters with true descenders in ROM, 64 user definable characters in RAM (384 bytes) Programmed printing (80 bytes of memory) for storing your own print sequences, dot addressable graphics with repetitive graphics data printing, RS232 and Centronics parallel interfaces standard, paper empty function and buzzer, self test routine. All this for

ONLY £235 (£7 carr.)

INTERFACES CABLE

BBC to Seikosha Cable **£10.00**

DUST COVERS

For SEIKOSHA GP80 **£3.75**
For SEIKOSHA GP100/250 **£3.95**

FRICTION FEED ATTACHMENT

For SEIKOSHA GP100/250 **£22**

- Spare RIBBON for GP80 **£4.50**
- Spare RIBBON for GP100 **£4.95**
- Spare RIBBON for GP250 **£5.95**

SEIKOSHA GP-700


The Colour Printer that has broken all price barriers.

A 7 colour graphic printer at the price of a standard dot matrix printer. Its unique 4 hammer method enables text and high res graphics to be drawn in 7 basic colours or 30 shades. 7 x 8 matrix. Up to 106 char. per line at 50 CPS. Variable line spacing to 1/120". Tractor or Friction feed. Centronix interface standard.

ONLY £399

GP-700 Colour Printer Screen-dump routine in ROM FOR BBC Micro **£12**

EPSON PRINTERS

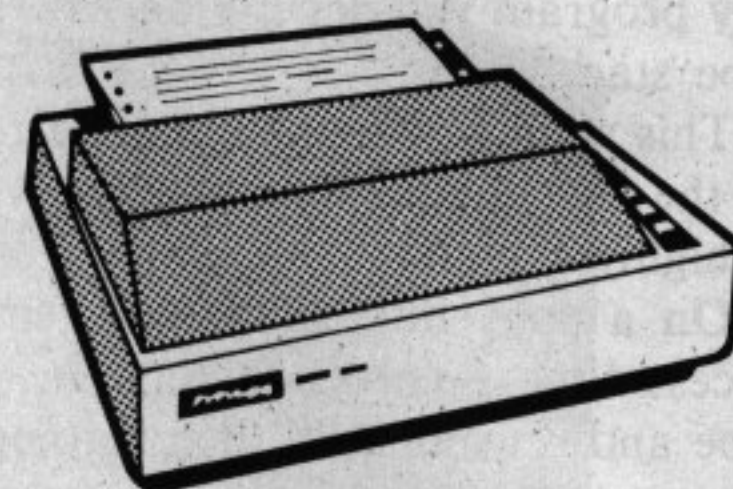

Epson RX80

100 CPS, 9 x 9 matrix, dot addressable graphics, condensed and double width printing. Normal, Italic and Elite Characters. Tractor feed, 10" max width, bi-directional, logic seeking. Centronics Interface standard.

ONLY £285 (£7 carr.)

Epson FX80

160 CPS, 11 x 9 matrix, proportional spacing, superscripts, subscripts, dot addressable graphics. Normal, Italic and Elite characters. Up to 256 user definable characters. Down loadable character set. Condensed and double width printing. Full proportional spacing. Four user defined margin positions. Tractor and Friction feed. 10" maximum width Bi-directional, logic seeking Centronics interface standard.

ONLY £388 (£7 carr.)

INTERFACES RX & FX PRINTERS

RS232	£38.00
RS232 plus 2K Buffer	£75.00
IEEE 488	£70.00
Parallel 2K	£62.00

	Ribbons	Dust Covers
MX80FT	£4.75	£4.50
MX100	£10.00	£5.25
FX80	£4.75	£4.95
RX80	£4.75	£4.50

NEW

JUKI 6100 DAISYWHEEL PRINTER

Elegantly finished; 18 cps; bi-directional - logic seeking; 10, 12, 15 CPI; proportional spacing; 100 character "drop-in" daisywheel; Triumph-Adler compatible; supports all Wordstar features; Diablo protocols; IBM Selectric ribbon; 2K buffer standard; connects directly to BBC Micro.


A bargain at **£385 (£7 carr.)**

BROTHER 8300 DAISY WHEEL PRINTER/TYPEWRITER

Provides high quality type in six interchangeable styles. Ideal for business use. Friction feed; 11 cps; 12 inch max. width; 5 different colour ribbons; portable; hard top cover with carrying handle; connects directly to BBC Micro.

ONLY £395 (£7 carr.)

NEC PC8023BE-C:

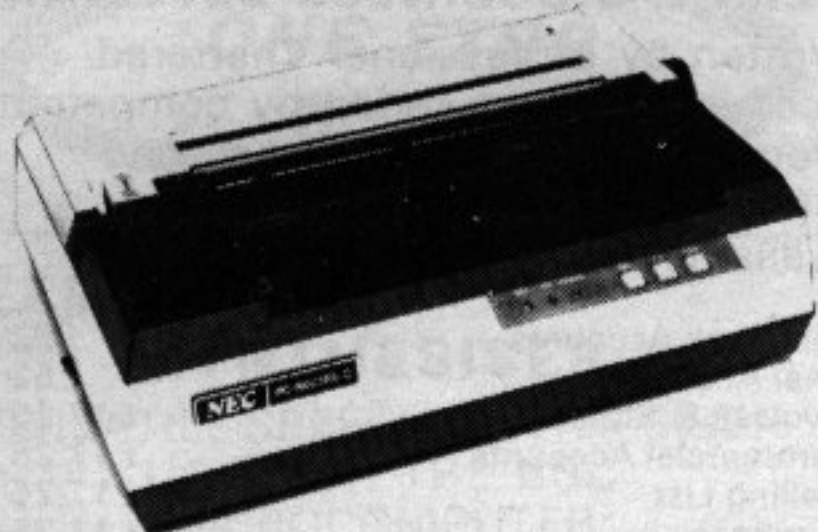

100 CPS, Bi-directional, logic seeking, 80 columns, 7x9 Dot Matrix head, true descenders on lower case, Superscript, subscript and underlining. Single sheet Friction or Tractor feed. Hi-resolution block graphics, 2K Buffer, etc. All this for only **£320 (£7 carr.)**

INTERFACES

BBC - NEC Interface Cable **£11.00**
RIBBON £6.90
DUST COVER £4.50

LISTING PAPER

8½" x 9½" Fanfold paper plain or ruled (1000 sheets) **£7 (£1.50p carr.)**
 15" Fanfold paper (1000 sheets) **£9 (£1.50p carr.)**
 Teleprinter Roll (econo paper) **£4 (£1.50p carr.)**

PRINTER LEAD 36"

Ready made printer lead to interface BBC Micro to EPSON, SEIKOSHA, NEC, etc., Printers.

ONLY £11

NEW

BBC Micro WORD-PROCESSING Package

A complete word processing package consisting of: BBC Model B, Zenith 12" Green Monitor, Twin 200K highly reliable (1 year warranty) Twin Cased Disc Drives with own power supply, the popular WORDWISE word processor, Watford's own highly sophisticated 62 File DFS interface fitted, the world renowned Brother 8300 Daisy Wheel Printer/Typewriter, Gemini's Beebplot & Beebcalc Spreadsheet Analysis Software tapes, 10 blank diskettes, 500 sheets of Fan-Fold paper, Manuals and all the leads. All you require is a mains power point to have it up and running (we even supply the 4 way mains socket).

ONLY £1,350 (carr. £15)


MONITORS

MICROVITEC 1431

14" Colour Monitor, RGB Input. (as used in BBC programmes) FREE Interface Lead. **£249 (carr. £7)**

- **KAGA RGB 12" Medium Resolution Colour £219 (Carr. £7)**
- **KAGA RGB 12" High Resolution Colour £259 (Carr. £7)**
- **BNC Connecting Lead £3**
- **RGB Connecting Lead £5**

ZENITH 12" Green Monitor. Hi-resolution **£75 (£7 carr.)**

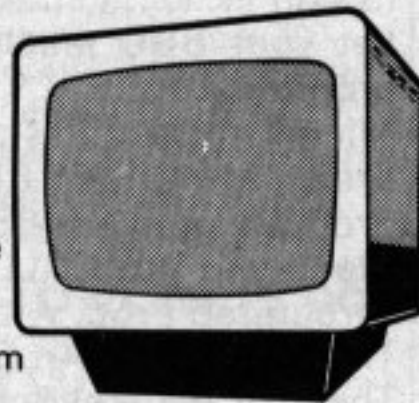

CASSETTE RECORDER & ACCESSORIES

Top quality Slimline, portable Cassette Recorder for Computer use. Mains/Battery, operated with counter.

£24.00
(Carr. £1.50)

CASSETTE LEAD

For our Cassette Recorder to BBC Micro **£2.00**

C12 Computer Grade **CASSETTES** in library cases. **40p**

READY-MADE LEADS for BBC

CASSETTE LEADS 7 pin DIN Plug to 5 pin DIN Plug + 1 Jack Plug **£2.00**
 to 3 pin DIN Plug + 1 Jack Plug **£2.00**
 to 7 pin DIN Plug **£2.50**
 to 3 Jack Plugs **£2.00**
6pin DIN to 6 pin DIN Plug (RGB) £2.50
 Monitor Lead, BNC to PHONO **£3.00**
 Disc Drive to BBC Micro Power Lead
 Single: **£3.00** Dual **£3.75**

MISCELLANEOUS CONNECTORS

	Plugs	Sockets
RGB (6 pin DIN)	30p	45p
RS423 (5 pin Domino)	30p	40p
Cassette (7 pin DIN)	25p	65p
ECONET (5 pin DIN)	15p	25p
Paddles (15 pin 'D')	£1.10	£2.15
Disc to BBC Power Plug 6pin	70p	
Disc Drive Power Plug 4pin	60p	

BEEBLOTTER

The Unique Graphic Tablet

Watford Electronics' BEEBLOTTER will work with 32K BBC Micro. Connects to Analogue port. The unique design makes it accurate and simple to use. Attractively finished. The comprehensive booklet supplied describes its use in detail and shows some of the possible applications.

The special features include:-

- * Works in all graphics mode and any colour selectable.
- * Commands printed on Tablet and On-screen instructions.
- * Special routines enable pictures to be quickly loaded from tape.
- * Works with all operating systems and ECONET. Tape and Disc versions available.
- * Large drawing area (32cms x 23cms).
- * Maps, Pictures and Diagrams produced quickly and easily.
- * Transparent tablet enables maps and diagrams to be copied directly from books.
- * Commands include line, circles and rectangle drawings, infilling, full editing and an easy to use copy and move feature.
- * Screen dump routines included for Seikosha and EPSON printers.
- * Routines are included to allow user to incorporate pictures in their own programs.
- * Designed by a professional teacher with educational uses in mind.

ONLY £75 (£3 carr.)

13 ROM SOCKET BOARD

Are you wondering where to fit new ROM based software inside your computer in addition to the BASIC, WORDPROCESSOR, DFS, and FORTH ROMS? Then our add-on 13 ROM Socket Board is the answer. Simply plugs into one of the four ROM sockets currently available in BBC Micro. There are only 4 solder connections to be made. Full instructions are supplied.

Our 13 ROM SOCKETS BOARD enables the User to increase the Sideways ROM capacity the basic four sockets on the main board upto the full SIXTEEN capable of being supported by current operating systems. In addition the board is designed with the facility to hold upto 16K RAM, which when switched into operation is automatically selected by any WRITE signal to the Sideways ROM area. This gives the User the ability to write a utility or language and upon pressing break have the utility or language up and running (new ROM software can be developed and tested in situ.)

The Board gives the User, plenty of freedom to explore the possibilities of the new paged ROMs due in the coming months and offers them the chance to develop their own.

All essential lines are buffered and the Board meets or exceeds all timings for operation in the BBC Microcomputer. When fully populated, the ROM Board consumes less than half the recommended maximum current limit.

Supplied ready-built and tested complete with fitting instructions.

ONLY £35 (carr. £1)
(Fitting optional extra £10)

CMOS RAM for the 13 ROM SOCKET Board

6116-150nS (2K) **£3.40**
 6264-150nS (8K) **£38.00**

EPROM for the BBC MICRO & 13 ROM SOCKET BOARD

	1+	25+
2764-250nS	£ 4.20	£ 3.75
27128-250nS	£23.00	£19.00

EPROM PROGRAMMER for BBC MICRO

At last! - the EPROM Programmer for BBC Micro Computer from WATFORD ELECTRONICS that will suit both your pocket and all your requirements. Programs all popular types of EPROMS from 2K bytes up to 16K bytes - **2764 — 2516 — 2532 — 2564 — 2764 — 27128.**

This extremely powerful system is designed for your needs of TODAY & TOMORROW! - BBC Basic programs can be copied into EPROM and subsequently re-loaded faster than from a disc! Suitable for both hobbyist and professional users!

Just look at these features:


- **COMPLETELY SELF CONTAINED** - Housed in its own sturdy case - Uses its own Power Supply - Connects directly to the 1MHz Bus - Simple and Safe!
- **FULL SOFTWARE SUPPORT** - Comes complete with simple to use ROM based software - Facilities include Verification, Reading, Virgin Testing, Writing, Editing, Saving, Loading and more! NOTE!! - This software does NOT simply comprise hastily prepared routines to get you going, but is a professional, purpose designed applications package.
- **ACORN BUS COMPATIBLE** - Use of the 1MHz connection complies with all Acorn addressing recommendations - That means you can still add-on such things as the TELETEXT, IEEE 488 and PRESTEL Adaptors without having to disconnect everything.

You don't need just any Eprom Programmer - you need **WATFORD ELECTRONICS EPROM PROGRAMMER** System.

ONLY £78 (£2 carr.)

Price includes software in ROM and Manual)

NEW - NEW - NEW

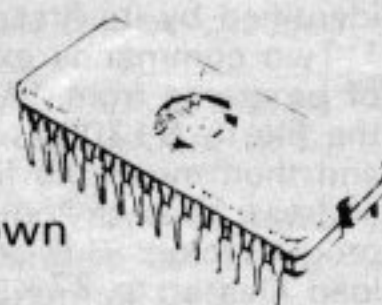

Watford Electronics' own BEEBMON

A ROM based machine code Monitor for the BBC Micro. It enables machine code programs to be debugged and altered easily and quickly. Being a ROM, its Commands are always readily available and occupy no USER memory.

The special features includes facilities like: TABULATE, MODIFY, FILL, COPY, COMPARE, SEARCH (Hex & ASCII), CHEKSUM, DISASSEMBLE, RE-LOCATE, SINGLE STOP, SET BREAK POINTS, SCREEN DUMP ROUTINE, DUMB TERMINAL and many more facilities.

£22

BBC LIGHT PEN KIT

All parts available as per Acorn User's 'SHINE A LIGHT' Light Pen article.

Kit Price: **£9.95**

BBC JOYSTICKS

Two versions available:

SINGLE: Player type **£7.00 each**
 TWO Players type **£11.50 per pair**

WATFORD ELECTRONICS

Continued →

★ NEW ★ BBC MICRO DFS

by Watford Electronics

This powerful new DFS is fully compatible with ACORN DFS yet has much increased power due to additions, carefully designed to make life easier in normal use. It consists of over 14K of efficiently written machine code. It is entirely self contained and so does not require a utilities disc to function.

- * The system can either use the ACORN standard 31 files per disc side or DOUBLE THE CAPACITY to 62 files. The size is selected at formatting time. Copying between discs with different catalogue sizes works perfectly normally.

- * A FORMATTING PROGRAM is built in, permitting formatting to 35,40,80 track formats with either 31 or 62 files. Since the formatter is built in to the DFS it can be used without affecting whatever program you are using.

- * A DISC VARIFIER is also built in. This checks the internal checksums on each sector to identify any corrupted data. This is extremely useful when saving valuable data as it shows faulty discs quickly and easily. Again it does not affect the program you are using.

- * A built in DISC SECTOR EDITOR gives a screen window onto the disc enabling detailed editing of any byte on the disc. This is very useful for recovering accidentally deleted files and can save weeks of work.

- * A double step mode allows the user of 80 TRACK DRIVES TO READ 40 TRACK DISCS. This mode is software selected for each drive individually, thus allowing a 40 track disc to be copied onto an 80 track one very easily. THIS ELIMINATES THE NEED FOR EXPENSIVE SWITCHABLE DRIVES.

- * A WORKFILE function sets the name to be used when the null filename is issued. This allows a program to be edited and repeatedly saved having only typed its name once.

- * When using LOAD, CHAIN, etc. it is possible to specify an ambiguous filename. This will result in the first file whose name matches the specification being used. This saves typing the end of a filename that you know is uniquely identified by its first few characters.

- * Two commands exist to simplify the transfer of programs from TAPE TO DISC. These load the file to &1200, switch off the disc system and then move the file to its correct load address; thus saving a lot of complicated programming. This command can be used to load files up to 27.K5 long.

- * An advanced COPY command is included which will prompt the user, requesting whether to copy each file.

- * RENAME has been extended to allow the use of ambiguous filenames. This allows you to change BERT1, BERT2, BERT3 to FRED1, FRED2, FRED3 with only one command.

- * OPENOUT has been improved to give you fewer annoying 'Can't extend' errors, as it automatically picks the biggest space on the disc in which to put a file. A SPACE command lets you know how much space *COMPACT could create before you waste time doing it.

- * 1.75K of RAM can be taken over from the DFS for your large BASIC programs while still retaining LOAD, SAVE and *CAT and other simple commands.

- * Comprehensive and clearly written Manual (available separately) gives the user a complete package deal.

Price **DFS ROM ONLY £42**

Complete interface kit incl. DFS ROM **£85**

Comprehensive and clearly written manual
£7.50 (No VAT)

P.S.

We will exchange your existing ACORN DFS for the highly superior Watford's DFS ROM for **£35**

FORTH ROM for BBC

This superb (FIG FORTH) compiling language now available in ROM. Simply plugs into one of the ROM Sockets. Full FORTH manual included. **£39**

ONLY THE BEST AT WATFORD

BBC FORTH on Cassette

Follows FORTH-79 standard and has fig-Forth facilities – Provides 260 FORTH words – infinitely extensible – Full screen editor – Allows full use of MOS – Permits use of all graphic modes, even 0-2 (just) – Easy recursion – Runs faster than BBC BASIC. **ONLY £15**
FREE 70 page manual and a Summary card.

BBC FORTH TOOLKIT

Adds following facilities to FORTH. 6502 Assembler, providing machine-code within FORTH – Turtle graphics enables easy to use colour graphics – Decompiler routines enables versatile examination of your compiled FORTH programs – Full double number set – An example FORTH program and graphics demonstration – Other useful routines – 64 page manual included **FREE. ONLY £13**

LOGO II

This language is very popular in American schools as it is an ideal educational program. It can graphically demonstrate the ideas of defined procedures, sub-routines, loops and even recursive programming. Gives excellent introduction to LOGO language for young and old alike.

£9.95

DISASSEMBLER

Will generate fully labelled assembly listings of any machine code program. Data is automatically differentiated from code and displayed together with its ASCII equivalent. Assembly listing can be saved in *EXEC format and subsequently incorporated into user programs. In our opinion this is an excellent software at an incredibly low price.

£6.95

EMULATOR

An extremely powerful and flexible machine code interpreter. Allows you to write and debug machine code as easily as BASIC. Features single step, breakpoint register display, edit modes, etc.

£7.25

Computer Concept's Firmware

BEEB-CALC

£33

A ROM based spreadsheet program, like wordwise this firmware is fast and simple to use – yet is a powerful spreadsheet analysis program, considerably better than the original 'calc' program – full floating point maths. Works in 40 or 80 column screen modes – variable column widths. Works with either cassette or disc. This ROM coupled with Wordwise can turn your micro into an ideal small business machine.

DISC DOCTOR

£22

This ROM contains useful disc utility programs. Enables recovery of any data off the disc including deleted files etc. The full disc editor allows the alteration of any bytes directly on the disc (or in memory), or the loading and saving of any track or sector on the disc. Automatic transfer of programs from tape to disc and vice versa. Also includes a whole host of other useful utilities – string search, function key editing, the ability to format 35, 40 & 80 track discs.

Wordwise

Without doubt the most sophisticated piece of software yet written for BBC Micro. It has all the features of a professional word processor yet is easy to use.

SPECIAL OFFER: ONLY £34

GEMINI'S BUSINESS SOFTWARE

Written by professional Chartered Accountants and coded by competent programmers. Ideal for small and medium sized companies. Now available from stock.

Cashbook Accounts	£52
Final Accounts	£52
Invoices & Statements	£17.25
Commercial Accounts	£17.25
Mailing List	£17.25
Database	£17.25
Stock Control	£17.25
Home Accounts	£17.25
Beebcalc Spreadsheet Analysis	£17.25
Beebplot	£17.25

N.B. All the above Gemini software is on tape. For Disc Based (40/80 track) please add £3.

BOOKS (No VAT on Books)

30 Programs – BBC Micro	£4.95
30 Hour BASIC (BBC Micro)	£6.00
6502 Application Book	£10.25
6502 Assembly Lang. Programming	£12.50
6502 Assembly Lang. Subroutines	£11.80
6502 Software Design	£10.50
ACORN ATOM Magic Book	£5.50
Advanced 6502 Interfacing	£10.95
Assembly Lang. Programming for BBC	£8.95
Assembly Lang. Prog. on BBC Micro	£7.40
BASIC Programming for BBC Micro	£5.95
BBC Forth	£7.50
BBC Lisp	£7.50
BBC Micro An Expert Guide	£6.95
BBC Micro ROM PAGING System Explained	£2.95
BBC Micro DFS Manual	£7.50
BBC Micro Revealed	£7.95
BBC Micro Instant Machine Code including Software Cassette	£34.00
Creative Adventure Programs on BBC Micro	£6.95
Creative Graphics on BBC Micro	£7.50
Discover BBC Machine Code	£6.95
Discover FORTH – Osborne	£11.25
Easy Prog. for BBC Micro	£6.50
35 Educational Programs for BBC Micro	£6.95
Further Prog. for BBC Micro	£6.90
FORTH Programming (Sams)	£12.50
Games BBC Computer can Play	£6.95
Getting Acquainted/Acorn ATOM	£7.95
Graphs & Charts on BBC Micro	£7.50
Intro to Micro Beginners Book (3 Ed.)	£9.90
Let your BBC teach you to program	£6.75
Micros in the Classroom	£4.90
Practical Prog. for BBC & ATOM	£5.95
Programming the 6502	£10.75
Mastering VISICALC (Sybex)	£11.95
Structured Prog. with BBC BASIC	£9.50
The BBC Micro An Expert Guide	£7.90
The BBC Micro Book, BASIC, SOUND & GRAPHICS	£7.40

BBC DFS MANUAL

A fully comprehensive disc manual for BBC Micros. All extra commands are included. A bargain at **£7.50** (no VAT).

BBC MICRO ROM PAGING SYSTEM Explained **£2.75**

A comprehensive explanation of the requirements for Sideways ROMs to be used in the BBC Micro. Language and Service entries are explained with their call numbers. This book contains all the information that we have discovered in writing our 16K BBC DFS. A must for all serious users of BBC Micro.

ONE STOP SHOP

BEEB SPEECH SYNTHESISER

VERSATILE SPEECH SYNTHESISER UNIT FOR THE BBC MICROCOMPUTER

Watford Electronic's very own Speech System. Specially designed so that even a novice can make his BBC talk:-

- SIMPLY** the best! - An unlimited speech synthesis system. Complete with easy-to-follow manual. Controlling software is in ROM so no Cassette Loading problems!
- PHONEMES** for word synthesis - That means unlimited vocabulary! No extra speech dictionary chips to buy!
- BUILT-in** Library of approximately 500 words to get you started.
- ENGLISH** accent - Utilises inflexion techniques to produce highly comprehensible speech.
- EASY** to use system - Just plug the software ROM into a socket, the Speech unit into the User Port, and away you go! No specialised 'dealer upgrade' required!
- COMPACT** unit - The whole system is built into a small case - easily tucked behind the computer. Auxillary output socket provided for direct connection to an external amplifier.
- HOURS** of fun! - Suitable for any application - Games, Educational Programs, Specialised Packages.

We know this all seems to good to be true but **DON'T BE LEFT SPEECHLESS!** Order your Versatile Speech Unit now!

Only £39

TEX EPROM ERASERS

* New Broom for EPROMS *

EPROMs need careful treatment to survive their expected lifetime. Rushing it could burn their brains out. So cop-out of this helter-skelter world; take it **easy** the TEX way and give your chips a well earned break. Cool, gentle and affordable. EPROMPT does it properly.

Two versions available:

- **EPROMPT EB** - The standard version. Erases up to 16 chips. **£32.00**
- **EPROMPT GT** - Erases up to 32 chips. Has an incorporated safety switch which automatically switches off the UV lamp when the Eraser is opened. **£37.00**

TEXTIME

(SOLID STATE ELECTRONIC TIMER)

EPROM Erasers need just half an hour to finish their job. It is the proper erase time for all EPROMs. While the Eraser is busy you may take a break but not for too long without our **TIMER** on the job. Over erasing can shorten data storage time. **TEXTIMER** will remember to switch off the lamp and your chips will forget nothing new. **TEXTIMER** will pay for itself in no time.

ONLY £15.00

GAMES SOFTWARE PROGRAM POWER

ADVENTURE	£6.95
ALIEN DESTROYER	£6.95
ANDERDROID ATTACK (C.Concept)	£6.95
CHESS	£6.95
COWBOY SHOOTOUT	£5.95
CROACKER	£6.95
ELDORADO GOLD	£5.95
Escape from Moonbase ALPHA	£6.95
GALACTIC INTRUDER	£6.95
GALACTIC COMMANDER	£6.95
KILLER GORILLA	£6.95
LASER COMMAND	£6.95
MUNCHYMAN	£5.95
MASTERMIND	£4.95
MOONRAIDER	£6.95
MICRO BUDGET	£7.95
ROULETTE	£6.95
SPACE MAZE	£6.95
SWOOP	£6.95
SEEK	£5.95
TIMETREK	£6.95

LEVEL 9 ADVENTURE GAMES

COLOSSAL ADVENTURE. The classic mainframe game "Adventur" with all the original treasures and creates + 70 extra rooms.

£8.65

ADVENTURE QUEST. Through forest, mountains, desert, caves, water, fire, moorland and swamp on an epic quest vs tyranny.

£8.50

DUNGEON ADVENTURE. The vast dungeons of the Demon Lord have survived his fall. Can you get to their treasure first.

£8.50

EDUCATION Software

JUNIOR MATHS PACK (32K) £6.95

Makes learning fun for 5-11 year olds. This package consists of 3 programs (menu driven) that increase in difficulty as your child becomes competent. A very good supplement to standard educational methods.

WHERE? £6.95

Do you know WHERE? you are? This well written program, using high resolution graphics offers timed tests on the geography of Great Britain.

WORLD GEOGRAPHY (32K) £7.00

Beautifully drawn Hi-Res colour map of the world illustrates and aids this graded series of tests on capital cities and populations of the world.

WORDHANG £7.80

(Age 7-13). A word guessing program based on the well known Hangman game. Uses full colour graphics. Complete with 260 words and the facility save your own list of words.

WORLDWIDE £7.80

(Age 7-15). Two constructive geography programs allowing children to build detailed data bases covering both the UK and the world. Encourages children to refer to atlas and reference books. Save the database anytime.

ANIMAL/VEGETABLE/MINERAL £4.95

(Age 7-13). Provides an opportunity for children to teach the computer to differentiate between objects. The program tries to guess the object the child has thought of, using personalised responses like Mmm ... I am thinking.

BRITISH GEOGRAPHY £6.95

Teaches a child the locations of Cities and Ports using directional keys.

CAROUSEL £5.50

Aimed at junior school age. Sequences of colours and sounds teaches a child to concentrate.

HAPPY NUMBERS £7.80

(Age 4-6). No reading skills are required to use this colour graphics number recognition and counting program. Children build patterns of flowers corresponding to figures, quickly learning their significance.

INTRO TO ARITHMETIC £10.45

4 programs - Additions, subtractions, multiplications and divisions. Help stage, moving graphics and colours. Worksheet produced at the end of program. (5-7 years old).

WRITING £5.50

Full screen demonstration of correct formation of lower case alphabetic characters. Several choice of sequence (5-7 years).

PLINTH FOR BBC MICRO

Protect your micro from the weight of the heavy TV/Monitor. This sturdy plinth is attractively finished in BBC colour. It can be used to support a monitor or a printer. The micro slides underneath comfortably. A must for every BBC Micro owner, specially for those who have to move/open their computer frequently.

Price: £11.95 (carr. £1.50)

PLINTH FOR PRINTERS

Keeps your desk tidy. Place the printer on the plinth and the paper underneath. Finished in BBC colour.

£11.95 (carr. £1.50)

★ NEW ★

CORONA SOFTWARE

Highly acclaimed at the BBC Micro User Exhibition

GEOGRAPHY - FRANCE	£5.50
GEOGRAPHY - GERMANY	£5.50
GEOGRAPHY - SPAIN	£5.50
GEOGRAPHY - ITALY	£5.50

(for Disc based software please add £2.75 to the above prices)

These separate packages teach basic geography of each country - seas, rivers, towns and mountains. There are tests on these which allow for some spelling errors. Praise is given for good results. It utilises BBC's Colour, Graphics and Sound facilities. The Italy package consists of two programs.

MATHS TRANSLATIONS (Age 9-19yrs)

This package explains how to translate Triangles and Quadrilaterals, moving these geometrical shapes on a grid. It goes step by step through the concepts and the matrix calculations involved. Excellent software.

£5.50

★ COMING SOON ★ DISC-FIX ROM

This ROM is an integrated, menu-driven DISC MAINTENANCE PACKAGE. Using simple menu selections, with intelligible prompts for any input required, the user can recover data from damaged discs. Facilities include:-

- Full screen editing of sectors on the disc.
- Sectors can be found by file name or sector number.
- Files and sectors can quickly and easily be dumped to a printer for examination and possible subsequent modification.
- COPY: blocks of data can be copied from any point on the disc to any other point. Blocks can be as small as one byte and can be transferred anywhere in a sector.
- SEARCH: The disc can be searched for any string, starting and finishing at any designated sector.
- VERIFY: Any block of sectors can be checked for their validity.
- FORMAT: Any track or group of tracks can be individually formatted to Acorn or Watford DFS standard.
- INSERT: Allows the manual creation of new directory entries to allow "undeletion" of files.
- BACKUP: This is similar to normal DFS backup but allows recovery after a disc error. Completely compatible with both Acorn and Watford Disc Filing Systems. Instruction manual supplied.

Price £19.00

TINY PASCAL (in 16K ROM)

PASCAL-T is capable of compiling source PASCAL into a compact very fast threaded-interpreters-code. Full editor and disc support are included. Comprehensive documentation supplied

£59

LOGO-FORTH (in 16K ROM)

Introduces this very powerful but extremely friendly turtle-graphics language. Users have full access to the FIG-FORTH support nucleus. Full documentation supplied.

£59

LAST but not the LEAST

VIEW The ultimate in Wordprocessing **£52**

MAIL ORDER AND RETAIL SHOP. TRADE AND EXPORT INQUIRIES WELCOME. GOVERNMENT AND EDUCATIONAL ESTABLISHMENTS OFFICIAL ORDERS ACCEPTED. CARRIAGE: Unless stated otherwise, please add 60p to all cash orders.

VAT: UK customers please add 15% VAT to the total cost incl. Carriage.

SHOP HOURS: 9.00am to 6.00pm. Monday to Saturday. (Ample Free Car Parking Spaces)

ACCESS ORDERS: Simply phone: Watford (0923) 50234. (24 Hours)

WATFORD ELECTRONICS
Dept. BBC, Cardiff Road, Watford, Herts, England.
Telephone: 0923 40588/37774. Telex: 8956095

MICRO POWER ARE TOP OF THE CLASS!

... AND WE'VE WORKED HARD TO BE THE BEST! Micro Power are an official service and information centre, and we are major suppliers to Government and educational establishments, and stock the complete range of Acornsoft and Program Power software as well as a wide range of B.B.C. Micro and general computing books. Our expert staff are always on hand to provide advice and assistance in the relaxed atmosphere of our showroom.

COMPUTERS

BBC Model A	299.00
BBC Model A with 32K	339.00
BBC Model B	399.00
BBC Model B with Disk Interface	P.O.A.

MONITORS

Microvitec 14" colour	286.35
Microvitec 20" colour	343.85
Kaga 12" b & w	123.05

PRINTERS

Epson FX80	458.85
Epson RX80	342.70
Epson MX80 IIIF/T	399.00
Olivetti Spark Jet	399.00
Seikosha GP100A	229.00
NEC PC8023	373.75
Parallel Printer Cable	15.50
Standard 10" tractor feed fanfold paper (per 1000)	9.20
Epson refill ribbons	3.39
Epson MX80 Dust Cover	4.50
Epson FX80 Dust Cover	4.50

DISK DRIVES

TEAC 40 track (100k)	228.85
TEAC 40 track (200k)	424.35
TEAC 80 track (200k)	327.75
TEAC 80 track (400k)	569.25
TEAC 80 track double sided (400k)	396.75
TEAC 80 track double sided double drive (800k)	711.85
TEAC CS55ES 40/80 track 100/200k (switchable)	374.90
TEAC CD55ES 40/80 track 200/400k (switchable)	626.75
TEAC connecting cable	17.25
Acorn 40 track (100k)	264.50
Acorn 80 track double sided double drive (800k)	803.85
Torch 80 track double sided double drive, 64k, Z80 & CPN operating system	897.00
Shugart 40 track (100k)	263.35
additional drive for above (100k)	163.30

ALL PRICES INCLUDE VAT. CARRIAGE FREE FOR ALL COMPUTERS, PRINTER, MONITORS AND DISK DRIVES. CARRIAGE FOR BOOKS AND SOFTWARE - ONLY 55p PER ORDER.

Send an SAE for our complete listing of hardware, software and books. ACCESS and BARCLAYCARD welcome.

WE HAVE PLACED LARGE ORDERS FOR THE ELECTRON: PLEASE 'PHONE FOR AVAILABILITY

**MICRO
POWER**

Dept. BMU 9
8-8a REGENT STREET,
CHAPEL ALLERTON,
LEEDS LS7 4PE
Tel: (0532) 683186 or 696343

ACCESSORIES

Concept Keyboard	79.35
Cable for above	20.70
Acorn Joysticks (pair)	13.00
Canvas cover for BBC	3.95
Vinyl cover for BBC	4.50
Complete upgrade	75.00
VIA chip	4.95
Buffer chip LS244	1.25
26-way connector	2.45
Disk interface (including fitting)	97.00
Econet Interface	70.00
3 C12 Cassettes	2.13
3 C15 Cassettes	2.24
3 C20 Cassettes	2.53
SS/SD Diskettes	2.88
DS/DD Diskettes	4.03
Wordwise	45.43
View	59.80
Speech Synthesiser	55.00
Beebpen	45.94
Kisho cassette recorder	19.95
Acorn BBC Recorder	29.90

MICRO POWER - PUT TO THE TEST WE'LL PASS WITH HONOURS!

I THOUGHT for a while that the editor was waxing lyrical. "What about fields and spaces?" he murmured as he passed my desk on the way to his abacus appreciation course.

"Very pastoral, sir", I fawned.

"No, idiot, what about your article on print field formatting and the SPC command."

I should have known.

WELL SPC is a very simple Basic command. Having said that, aren't they all until you start to use them!

Seriously though, SPC is simple to use. As you might guess it's concerned with spaces. You use it after a PRINT statement to put spaces between print items.

The format is SPC(n), where n is the number of spaces you want inserting. For example you might want

to print a name with five spaces between each word and so have a line like:

```
100 PRINT "A";SPC(5);"B";SPC(5);"C"
```

This will print:

A B C
on the screen.

See what I meant by simple? SPC can make your output more legible and also, as I'll come to later on, can help avoid errors arising from poorly thought-out screen displays.

While you've been using the PRINT statement to put things to screen you may have noticed a small problem. Sometimes when the answer to a calculation fills all 10 spaces of a print field it can run into the field next to it. This gives what looks like one large answer instead of two.

Take a look at Program I. It shows how such overflowing may lead to problems.

```
10 REM PROGRAM ONE
```

```
20 LET X=100
```

```
30 PRINT X/10,X/3,X/5
```

Of course you can get round this by using the SPC command

Take to the fields with SPC

By **NIGEL PETERS**



From Page 31

mentioned earlier or printing each answer on a different line.

There is, however, another way. You can alter a system variable which will change, among other things, the number of characters you can have in a print field.

This variable is @%. The % sign is upper-case 5 and @ can be found on the keyboard to the right of the letter P.

@% is an integer variable and its value determines the number of characters there will be in each print field. For example:

@%=20

gives print fields 20 characters long. If you want to get back to the normal setting all you have to do is to enter:

@%=10

which sets the print fields back to the values they are when you switch the micro on.

Program II will allow you to experiment with field lengths to your heart's content. Press Escape when you've had enough.

```
10 REM PROGRAM TWO
20 REPEAT
30 INPUT "How long do you want your
fields",field
40 LET @%=field
50 IF field >40 THEN PRINT "WHY
BOTHER?"
60 PRINT 1,2,3,4
70 PRINT "a","b","c","d"
80 UNTIL FALSE
```

You can now see that you can sort out Program I with a line such as:

5 LET @%=20

But remember that when you've run the program the fields will remain set at 20 characters long until you either reset them or switch the micro off.

Now you know how to vary the print fields. Simple isn't it?

So far it is, but from here on in it gets more complicated.

This is because there's a lot more that you can do with @% than just use it to play around with the field lengths. However don't worry if you don't understand what follows first time round.

When and if you ever need to know more about @% and print field formatting you will understand it more easily in the light of what you intend to do.

As the editor says in his forthcoming book "Zen in the Art of Pro-

gramming": "You already have the solution. However you will not know you have it until you meet the problem."

When we used @%=20 to divide the screen up into print fields of 20 characters in length we were only using part of its scope.

It can also be used to control how numeric output is presented on screen and to what accuracy.

For example, if we enter:

@%=402030A

into the micro not only will we have print fields 10 characters in length but also all figures printed will be to three decimal places of accuracy.

We have this control over how numeric output is displayed because @% can be used to select between three different screen formats.

This is achieved by treating it as a three byte hexadecimal number of the form:

@%=&xxyyzz

If you don't know what a hexadecimal number is don't worry too much. You can understand what follows by looking on xxyyzz as a code number that the micro uses to find out how it should print numbers on the screen.

Let's take the xx part first. This can have three values, either 00, 01 or 02. These numbers determine which of three print formats the micro will use.

If you type in 00 in the place of xx in @%=&xxyyzz you put the micro in what is known as General Format.

General Format is basically the format the micro is in when you switch on. It allows you to print numbers to the screen as normal.

It only goes into the exponential form when it has filled up the print field you've allocated. Or if you've decided on going to the exponential form of representing numbers after a fixed number of figures.

This is what the yy and zz parts of the code are for.

The zz is simple enough. It is the length of the print field that you want in hexadecimal. This means that if you want a field 10 characters long zz becomes 0A.

The yy tells the micro how many character spaces of the chosen field can be used before it must start printing numbers in the exponential form.

Suppose you entered:

@%=00030A

What you have done is to select the General Format (xx=00), told it that after the numbers it prints are

over three figures long it will have to display them exponentially (yy=03), and that the print fields are to be 10 characters long (zz=0A).

Don't worry too much if this doesn't make much sense at first. It's one of those things that is difficult to grasp in theory but easy in practice.

A few minutes playing around with the example program will make it clear.

The second format is the Exponential Format. In this, as you might guess, numbers are displayed in the exponential form. It means that the numbers are expressed as decimals multiplied by the appropriate power of ten.

The decimal comes first, then the letter E to show that it's an exponential, followed by the power of 10.

For example, in exponential form:

100 becomes 1E2 (1 * 100)

1230 becomes 1.23E3 (1.23 * 1000)

We obtain exponential form by entering 01 in the place of xx.

Once in Exponential Format we can use the value of yy to specify how many figures we want before the E of the exponential.

If we want two figures before the E (not counting the decimal point) we let yy become 02.

As you might expect zz is used to choose how many characters are wanted in the print field.

Suppose we entered:

@%=4010408

What we get is the Exponential Format (xx=01), four figures – and a decimal point – in front of the E of the exponent (yy=04), and the print fields are set at eight characters (zz=08).

Again, don't worry too much if this isn't clear at first. Just play around with Program III. First input 10, 100, 1000, 10000. Then become more adventurous with your numbers.

You'll soon see how Exponential Format works and the effect the yy part can have on the accuracy of the figures displayed.


The final format is the Fixed Decimal Format, selected by entering 02 for xx. This allows us to select how many decimal places we require in our output by using yy to specify them.

As usual zz is used to determine the print fields.

As an example try:

@%=402030C

You will have selected the Fixed Decimal Format (xx=02), the figures



will be accurate to three decimal places (yy=03) and the print fields will be 12 characters long (zz=0C). Remember it's hexadecimal. Note that you can only go to nine significant figures.

That's it – those are the three types of print formatting. It's all summed up for you in Figure I. Easy isn't it?

Well, maybe not at first but Program III should help:

```
10 REM PROGRAM THREE
20 INPUT "Four numbers",a,b,c,d
30 REM General Format
40 LET @Z=L00030A
50 PRINT a,b,c,d
60 REM Exponential Format
70 LET @Z=L01030A
80 PRINT a,b,c,d
90 REM Fixed Decimal
100 LET @Z=L02030A
110 PRINT a,b,c,d
```

Program III

This allows you to put in four different numbers and see how they

are treated by different print formats. Lines 40, 70 and 100 change the value of @% and so alter the formats. When you're feeling more adventurous have a go at changing the values of @% yourself.

A little playing on the micro and you'll soon become an expert on print formatting.

And so we come to the end of our dealings with the PRINT command. It may seem like a lot of fuss over a

fairly simple keyword, but I think it's worth it.

Remember that no matter how brilliant your program is it will probably be judged by the output it produces. So if you want your work to be appreciated use PRINT wisely.

Myself, I just hope that the editor appreciates my work and gives me a holiday. I could do with a break in the fields and open spaces.

FORMAT	XX	YY	ZZ
General	00	number of places until exponential form used	field length
Exponential	01	number of figures in front of E	field length
Fixed Decimal	02	number of decimal places	field length

Figure I:

3D COMPUTERS



THE  **ACORN**
SPECIALISTS

BBC Micros Ex-stock

Appointed Distributor for the BBC Buggy

PERIPHERALS

PRINTER
COLOUR MONITOR
DISC DRIVE
TORCH Z80 DISC
CASSETTE RECORDER
CUMANA DISC DRIVES

SOFTWARE

ACORNSOFT
BBC SOFT
PROGRAM POWER
BUG-BYTE
SIMON HESSEL

ADD-ONS

JOYSTICK
LIGHT PEN
GRAPHICS TABLET
TELETEXT
Z80 PROCESSOR
6502 PROCESSOR
MEMORY UPGRADE
DISC INTERFACE

BOOKS

30 HOUR BASIC
BBC BASIC
BBC MICRO REVEALED
LET YOUR BBC TEACH
LEARNING TO USE BBC
ASSEMBLY LANGUAGE

TOLWORTH:
230 Tolworth Rise South,
Tolworth, Surbiton,
Surrey KT5 9NB
Tel: 01 337 4317

SUTTON:
30 Station Road,
Belmont, Sutton,
Surrey SM2 6BS.
Tel: 01 642 2534

EALING:
114 Gunnersbury Avenue,
Ealing, London W5 4HB
Tel: 01 992 5855

RICKMANSWORTH:
Greystone Works,
The Green, Croxley Green,
Rickmansworth,
Herts WD3 3AJ.
Tel: (0923) 779250

MILTON KEYNES:
Unit 1, Heathfield,
Stacey Bushes, Milton
Keynes,
MK12 6HP
Tel: (0908) 317832

NEWBURY:
26 Stanley Road,
Newbury, Berks RG14 7PB
Tel: (0635) 30047

Easy parking at all our branches.

Closed Mondays.

October 1983 MICRO USER 33

JIM NOTMAN reviews the latest Amcom DFS

SINCE I looked over an early release (serial no. 1631) of the Amcom DFS last month I've had the opportunity of comparing it with a new version (serial no. A7370) in which a number of modifications have been made.

If school reports were given for software, this one would read "Amcom's performance has greatly improved this term, showing promise for the future".

The Acorn mode has been altered to make it more compatible with software written to take advantage of the special features of the Acorn DFS.

It now supports the *ACCESS command, and the OSGBP calls 5, 6, 7 and 8 now work as expected.

OSWORD calls &7D and &7E are still not standard. OSWORD &7E is of use in file management as it should read the number of sectors on the disc.

*DELETE will delete an open file from the directory, leaving data in a buffer. The Acorn DFS would give the "File open" error in this case.

The "Disc fault" error does not give the error number that is returned by the floppy disc controller (the 8271), which would be useful in fault finding.

The disc handling still takes place with the interrupts disabled. This is

something to be aware of as it affects the system clock (TIME) and all the other functions driven by interrupts.

The most noticeable improvement has been in the speed of operation. The first version tested was rather disappointing in this respect.

All the benchmarks now run with the Amcom DFS.

Such was the improvement in speed, especially with some of the relative file handling (PROG8A) that I used

several different timing devices to ensure the accuracy of the observations.

As can be seen from the revised comparative benchmark results, no DFS is fastest in every aspect, but Amcom now shows its pace in reading data from the disc.

Watford have just told us that they have made some improvements to their DFS too. As soon as we get the new version we'll let you know about it.

No.	Benchmark	Acorn 0.90	W.E. 1.00	Amcom A7370
	*SAVE 16K	2.7	3.6	6.7
	*LOAD 16K	2.5	2.4	3.8
	*BACKUP	28.0	28.0	36.9
1	OPEN + CLOSE files *1000	4.2	6.4	5 for 10
2a	PRINT 1000 numbers	15.1	10.4	11.6
2b	PRINT 100 strings	59.6	45.1	63.9
3a	INPUT 1000 numbers	13.0	9.1	6.0
3b	INPUT 100 strings	55.2	42.4	23.6
4	BPUT 1000 bytes	4.9	4.3	6.3
5	BGET 1000 bytes	4.6	4.1	3.3
6	move PTR 1000 places	2.3	2.7	3.0
7a	write test relative file	60.9	45.6	67.1
7b	read test relative file	56.8	44.1	24.5
8a	write relative file backwards	234.6	137.6	82.5
8b	read relative file backwards	97.5	56.0	39.6

BBC OWNERS

Why not consider the HOBBIT FLOPPY TAPE SYSTEM for your computer?

The HOBBIT gives you all the facilities you would expect from a floppy disc at a fraction of the price.

BRIEF SPECIFICATIONS: Read/Write speed of 7500 BAUD per second ● Capacity: 101K BYTES per CASSETTE ● Average access time 22 seconds ● Up to 120 FILES per CASSETTE ● Completely automatic – no buttons to press ● Fully built, boxed and tested. Just plug in and go ● System can support TWO DRIVES ● Connects to user port ● Works on all operating systems ● No disc interface.

Available from stock **PRICE £135.00 plus VAT**

Manual only £1.50 Postage £3.00

– NOW AVAILABLE –

ZERO MEMORY OPTION

Enables the Hobbit to operate within using any of the Beeb's memory.

Price £25.77 – VAT

For more details contact:



COMPUTER PRODUCTS

KILN LAKE, LAUGHARNE, CARMARTHEN, DYFED SA33 4QE.

Telephone: (099 421) 515

or
available from
most good Computer Shops

Also available for NASCOM computers **PRICE £120.00 plus VAT**

Access and Barclaycard accepted

GONE FISHIN'

The game that will have you hooked

By DANIEL J. BISHOP



THE noble sport of angling is simulated very realistically in this game. The main difference is that you do not have to wait an hour for a bite!

It uses Mode 7 and Mode 5 graphics, and should run on all model B versions of the BBC Micro, including disc systems.

Up to four anglers may take part. The object of the game is to catch the most, the biggest and best fish from the waters of Lake Beeb.

There are ten species of fish which may be caught. Each angler can alter his or her tactics during the game by pressing any key and then issuing instructions to the computer.

An angler can fish far out or near to the bank, at the bottom of the lake or near the surface, using maggots, worms or bread as bait.

Experienced anglers will learn the feeding habits of the various types of fish. However, such rules do not always hold true, because there is a random element throughout the game.

The anglers decide how many minutes the game will last – to a maximum of 60 – but may end the game at any time.

When the program starts, a title display in Mode 7 appears, accompanied by a jingle.

When a key is pressed, there is a page of brief instructions. Press the key again and a plan view of Lake Beeb is drawn in blue and green.

The number of anglers, time of play and names of anglers are asked at the bottom of the screen. Answer these questions and press return after each reply.

As each person inputs their name, a graphical representation of each angler is drawn, standing on the banks of Lake Beeb. The game proper then begins.

When an angler's float disappears, the angler must strike quickly by hitting any key (the spacebar is easiest).

If the fish is caught, it is reeled in. You are told its weight, name and number of points gained.

To instruct the computer, press any key. Then enter your name.

After the prompt "OK?" enter your instruction, which must be one or more of the following commands: NEAR, FAR, TOP, BOTTOM, BREAD, WORM, MAGGOT, FINISH, HELP.

The command FINISH ends the game. The command HELP produces a list of all the commands.

Turn to Page 99

OPUS AUTUMN OFFERS

JVC 14" COLOUR MONITOR OFFER

RGB MEDIUM RES £199.00

Resolution, 370 x 235 Pixels.
Display, 80 characters x 25 lines.
Slot Pitch 63mm.
Input, Video – RGB Analogue with TTL input.
STNC – Separate SYNC on RGB.
Features, On/Off switch with pilot light. Brightness control. Power 220/240V 50/60HZ.

RGB HIGH RES £299.00

Resolution, 580x235. Pixels.
Display, 80 characters x 25 lines.
Slot Pitch 41mm. Input, Video – RGB Analogue with TTL input. SYNC – Separate SYNC on RGB.
Features, On/Off switch with pilot light. Brightness control. Power, 220/240V 50/60HZ.

- * Fast ex-stock delivery.
- * 1 year warranty
- * Quantity and Educational discounts available.

This month's offer is another winner – a consignment of 14" R.G.B. colour monitors manufactured by J.V.C. – at prices never seen before in the UK. Suitable for use with BBC Micro.

Lynx, Oric, Apple II, Apple III and IBM etc.

It's safe to put a cheque in the post today. Because, if you find someone who's cheaper, we'll refund the difference.



DISC DRIVE DISCOUNTS

- * Japanese manufacture.
 - * Slimline * Low Power Consumption.
 - * Ideal for use with BBC, Dragon, etc.
- Canon MDD 6106 S/S 40 Track
100K S.D. 200K D.D. **£129.95**
- National Panasonic D/S 40 Track
200K S.D. 400K D.D. **£159.95**
- Cases and Leads as for TEAC.


TEAC DISC DRIVES

- * Latest technology
 - * ½ height * Fast access time
 - * Direct drive mechanism
 - * Hardware 40/80 switchable.
- TEAC 55A – S/S 40 Track
100K S.D. 200K D.D. **£139.95**
- TEAC 55F – D/S 80 Track
400K S.D. 800K D.D. **£229.00**
- Case to hold 1 drive **£9.95**
Dual case with PSU **£39.95**
P. Lead **£5.00** Ribbon Lead **£12.00**
Dual Ribbon Lead **£15.00**

CASED DRIVES

Complete with all Leads and ready to run:-
Case has PSU.

- * Dual 200K Drive **£319.95**
 - * Dual 400K Drive **£349.95**
 - * Dual 800K Drive as illustrated.
- 40/80 switchable
800K
£499.95

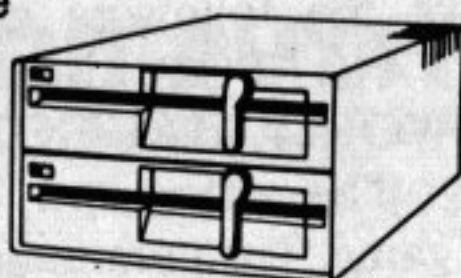


ACORN D.F.S. NOW IN STOCK

NEW OPUS LOOK 3" MICRODRIVE

The first nationally available dual sided 3" Drive offering 500K capacity.

- * 200K Formatted S.D.
- * 400K Formatted D.D.
- * Japanese Manufacture.
- * Fully compatible with 5¼" Drives
- * One touch cartridge loading
- * 3 ms. Access time
- * Direct Drive

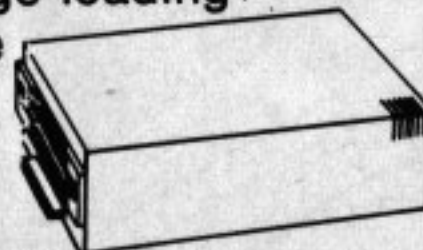

Single Drive * 200K/400K
ONLY £199.00

Dual Drive * 400K/800K
ONLY £399.00

FREE on first 100 orders received.
We will supply case and leads free of charge.

MEDIA

Disc Cartridges 1 off **£4.95**
Pack of 5 **£22.50**

SEE US AT THE PCW SHOW –
BARBICAN – STAND 204

BBC MICRO USER SHOW
NOTTINGHAM – STAND 23

To Order: Add carriage at the following rates:-
Discs 85p. Other goods £7.00.
Add VAT at 15% to total and send your order to:-

OPUS SUPPLIES

158, Camberwell Road, London, SE5 0EE
Tel: 01-701 8668 (3 lines) 01-703 6155/6/7



Government and Educational orders welcome.




THE "ORGANISER"

THE ORGANIZER DESK

ONLY
£49.50

- * Teak finish
- * On castors
- * Self assembly
- * Full instructions provided
- * Top shelf for monitor/printer
- * Large desk top area.

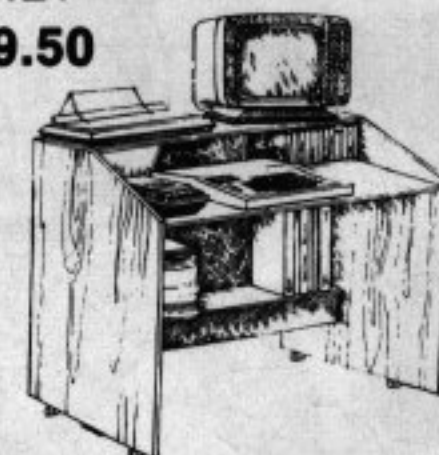

- * Lower shelf for paper/book storage – ample room in front of the shelf for you to sit comfortably.

12" GREEN SCREEN MONITOR

One year warranty 22MHZ
Ex-stock delivery. Limited quantity

Phono Connector. Only
£69.95

Lead to connect to BBC **£3.95**

NASHUA FLOPPY DISCS

Minis

S/S S/D	£16.95 for 10
S/S D/D	£19.95 for 10
D/S D/D	£22.95 for 10
S/S 80 Track	£24.95 for 10
D/S 80 Track	£26.95 for 10

8" Discs

S/S S/D	£17.95 for 10
S/S D/D	£23.95 for 10
D/S D/D	£24.95 for 10

With full 5 year warranty. All mini discs have hub rings and a FREE plastic library case.

Opening Hours Mon-Fri 9.00-6.00
Sat 9.30-1.30

MASTER CLASS

An introduction to the skill of computer programming to help you to understand the principles of BASIC and write your own programs.



How to use your computer

STARTING BASIC WITH THE BBC MICRO COMPUTER No.1

With David Redclift

MASTER CLASS

On this tape David Redclift continues the teaching of the skills of computer programming using BASIC.



4 FREE PROGRAMS

How to use your computer

FURTHER BASIC WITH THE BBC MICRO COMPUTER NO.2

With David Redclift

MASTER CLASS

This tape demonstrates some of the uses to which the BBC Microcomputer can be put in the classroom, and how the teacher can expand and evaluate their worth.



2 FREE PROGRAMS

The BBC Micro Computer in Primary Education.

With David Redclift

The easy way to learn more about your BBC Micro

The Master Class series of videotapes has been widely acclaimed as the user-friendly way of learning how to write programs on your BBC Micro. Presented by David Redclift, who has been training computer programmers for the last 12 years, the tapes give a hands-on introduction to the principles of Basic and guide the user through writing his first programs. The sound tracks of the tapes contain programs which can be loaded into the BBC Micro and used as part of the course.

ORDER BY POST TODAY!

Please send the following videotapes at the special price of £19.95 each (inc. VAT, P&P)

Starting Basic with the BBC Micro No. 1 ☐

Further Basic with the BBC Micro No. 2 ☐

The BBC Micro in Primary Education ☐

TOTAL £

Please state format required

☐ VHS ☐ Betamax

Name

Address

Signed

Please indicate method of payment (✓)

☐ Access/Mastercharge/Eurocard

☐ Barclaycard/Visa

☐ American Express


Card No.

Expiry date

☐ Cheque/PO made payable to Database Publications Ltd.

Send to: Micro User, FREEPOST, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY. (No stamp needed if posted in UK).

BYTE YEARS AHEAD!

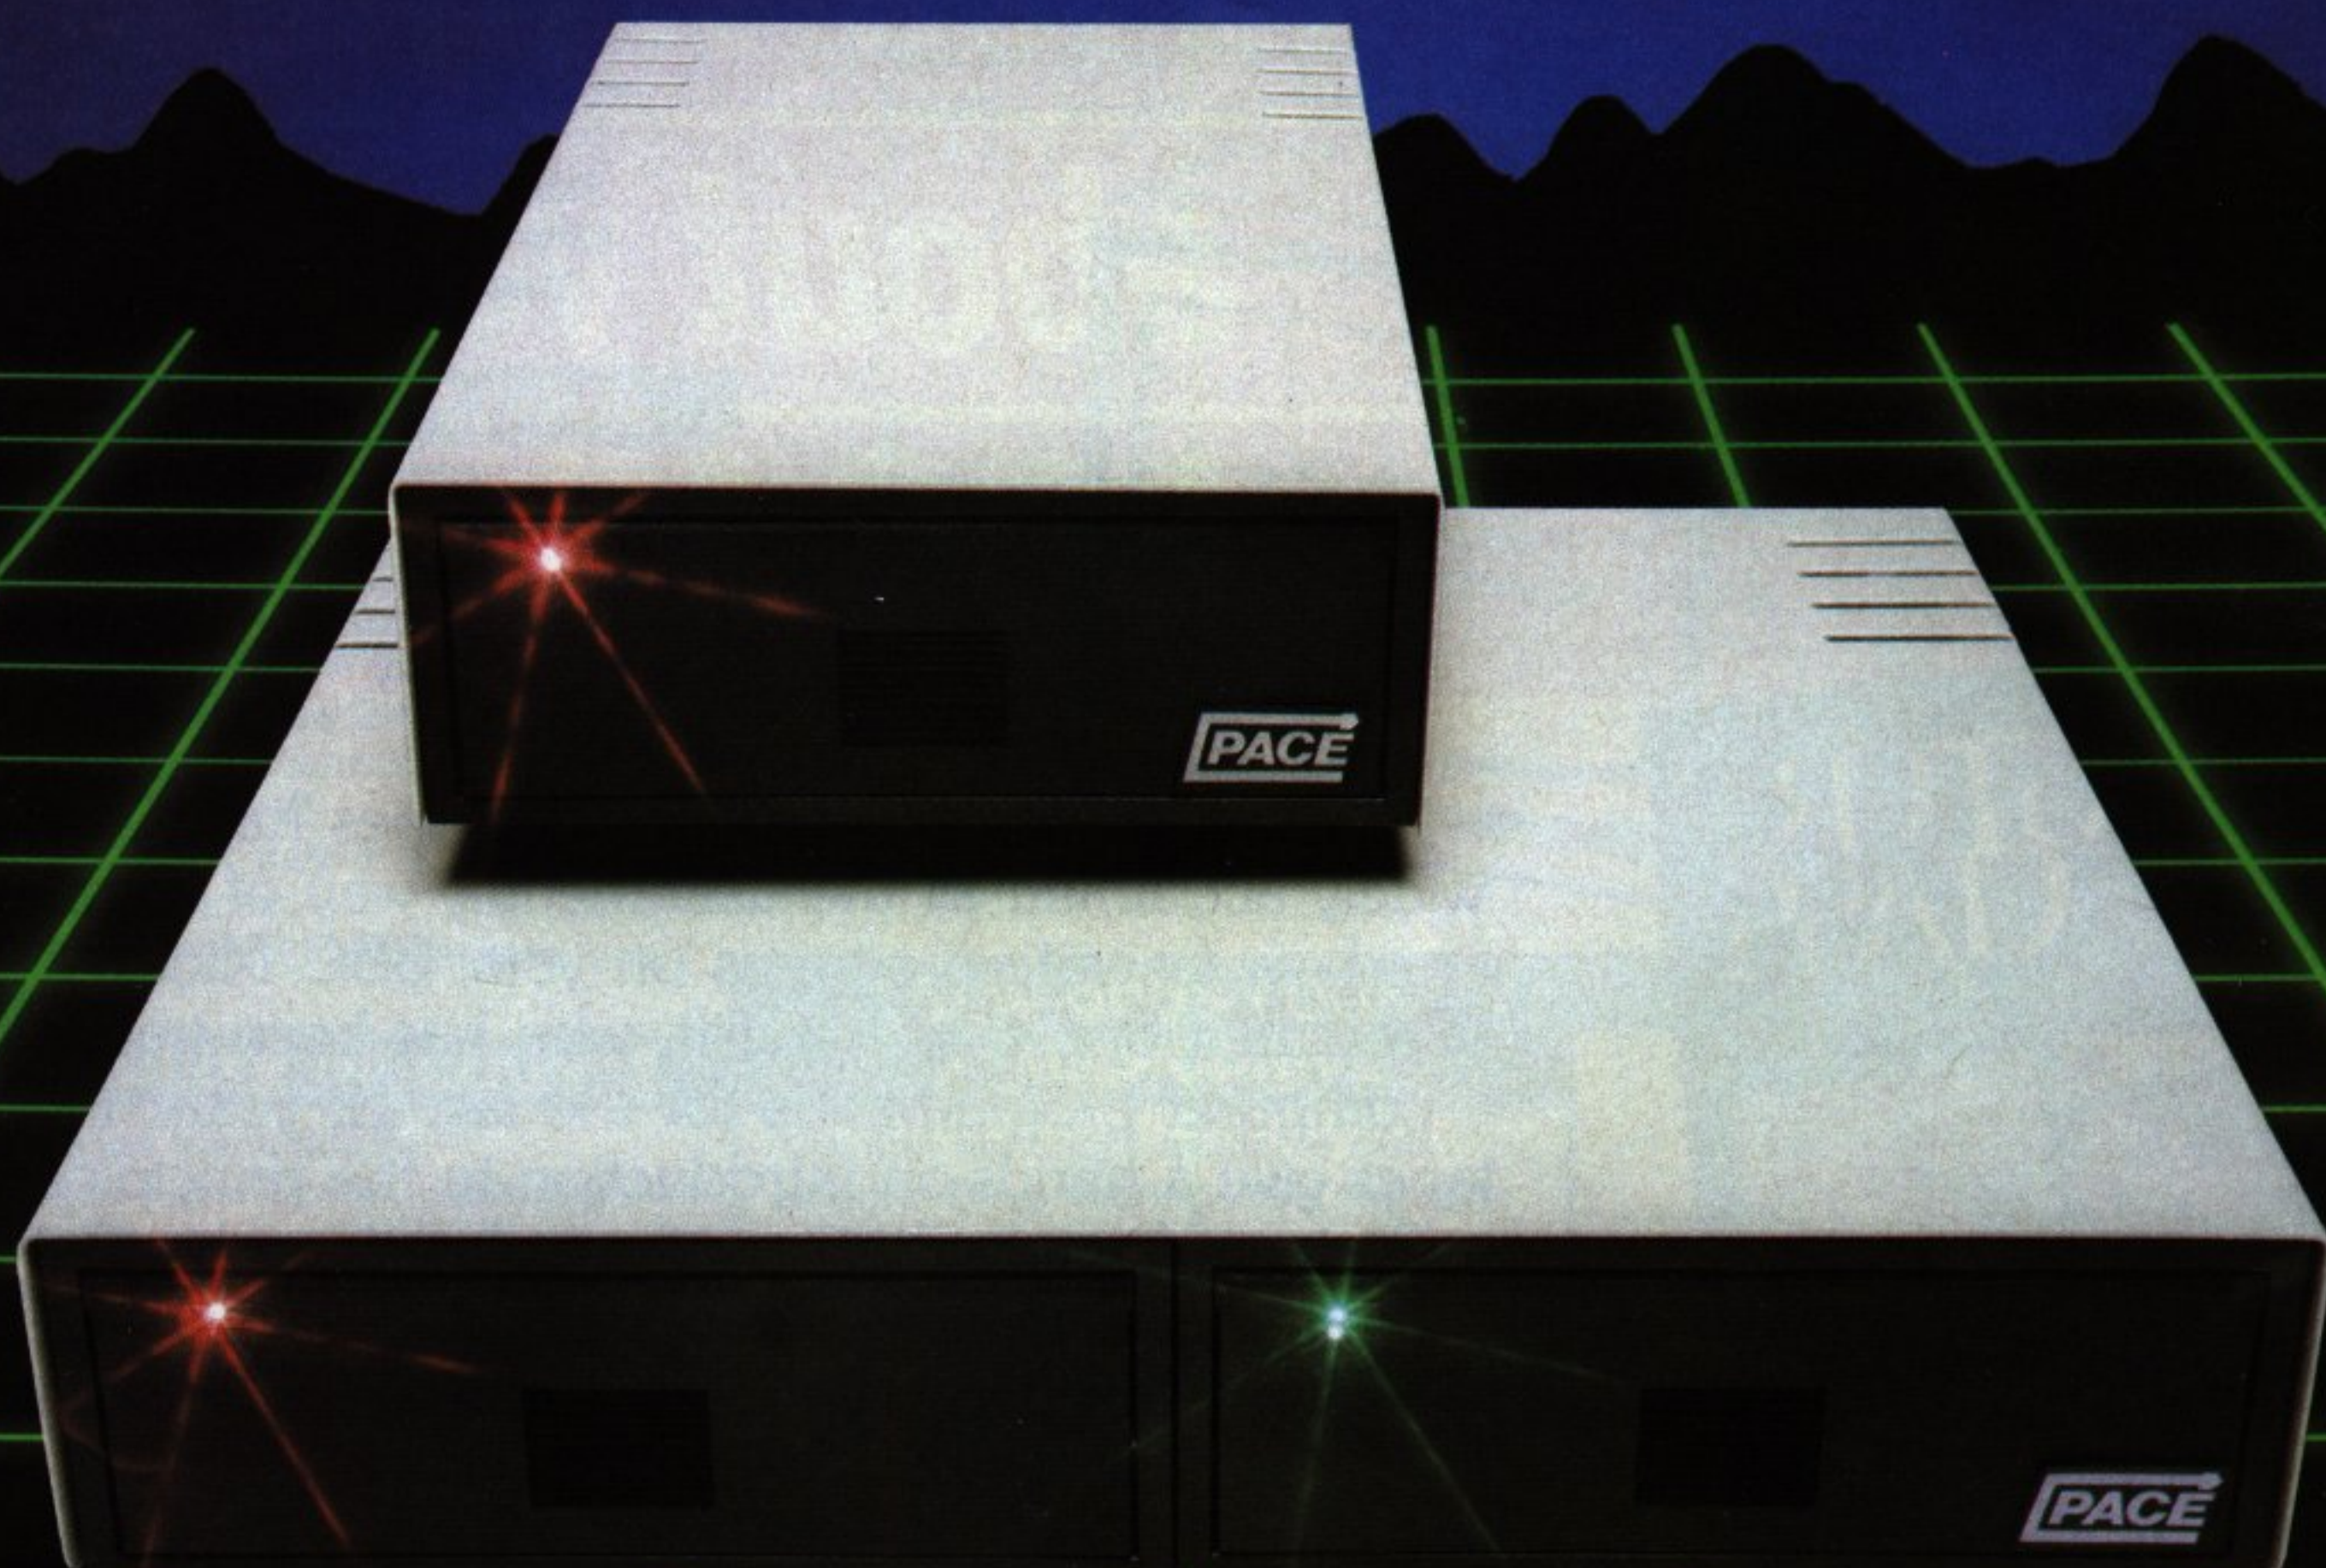

Now available for the BBC Microcomputer, this superb range of high performance, low profile disc drives which give more data storage, and use less space.

The Pace range of drives include two drives which are switchable between 40 and 80 tracks. As these drives are double sided they give a massive 400 k *per drive* in 80 track mode, whilst in 40 track mode they retain compatibility with Acornsoft


and other commercially available software. These dual track drives feature multi-colour LED's to indicate mode selection.

All Pace drives are capable of being used as double density drive so that, as and when, a new filing system and interface become available, the disc storage capacity will be doubled (eg. the dual 40/80 drive will have an unbelievable 1.6m of storage).

Pace disc drives are designed to run off the BBC power supply and are supplied complete with all cables, a utilities disc and manual.



92 NEW CROSS STREET,
Bradford BD5 8BS.
Tel: (0274) 729306
Telex: 51564



Dealer enquiries welcome


Disc drives available:-

			ex. V.A.T.	inc. V.A.T.
PSD1	Single Sided Drive (40 track)	100k	£185	£212.75
PSD2	Double Sided Drive (40 track)	200k	£235	£270.25
PSD3	40/80 Switchable Drive 400k		£345	£396.75
PDD1	Dual Single Sided Drives (40 track)	200k	£338	£388.70
PDD2	Dual Double Sided Drives (40 track)	400k	£449	£516.35
PDD3	Dual 40/80 Switchable Drives	800k	£610	£701.50

Carnage and insurance charge of £4.50 inc. V.A.T. to be added per drive

Also available from:- Computer City, Widnes, Cheshire. Tel: 051-420-3333. Computerama, Stafford. Tel: 0785-41899.
Computerama, Stoke on Trent. Tel: 0782-268620. G.T.M., Leeds. Tel: 0532-647474. Wilding Computer Centre, Wigan. Tel: 0942-44382

WHY

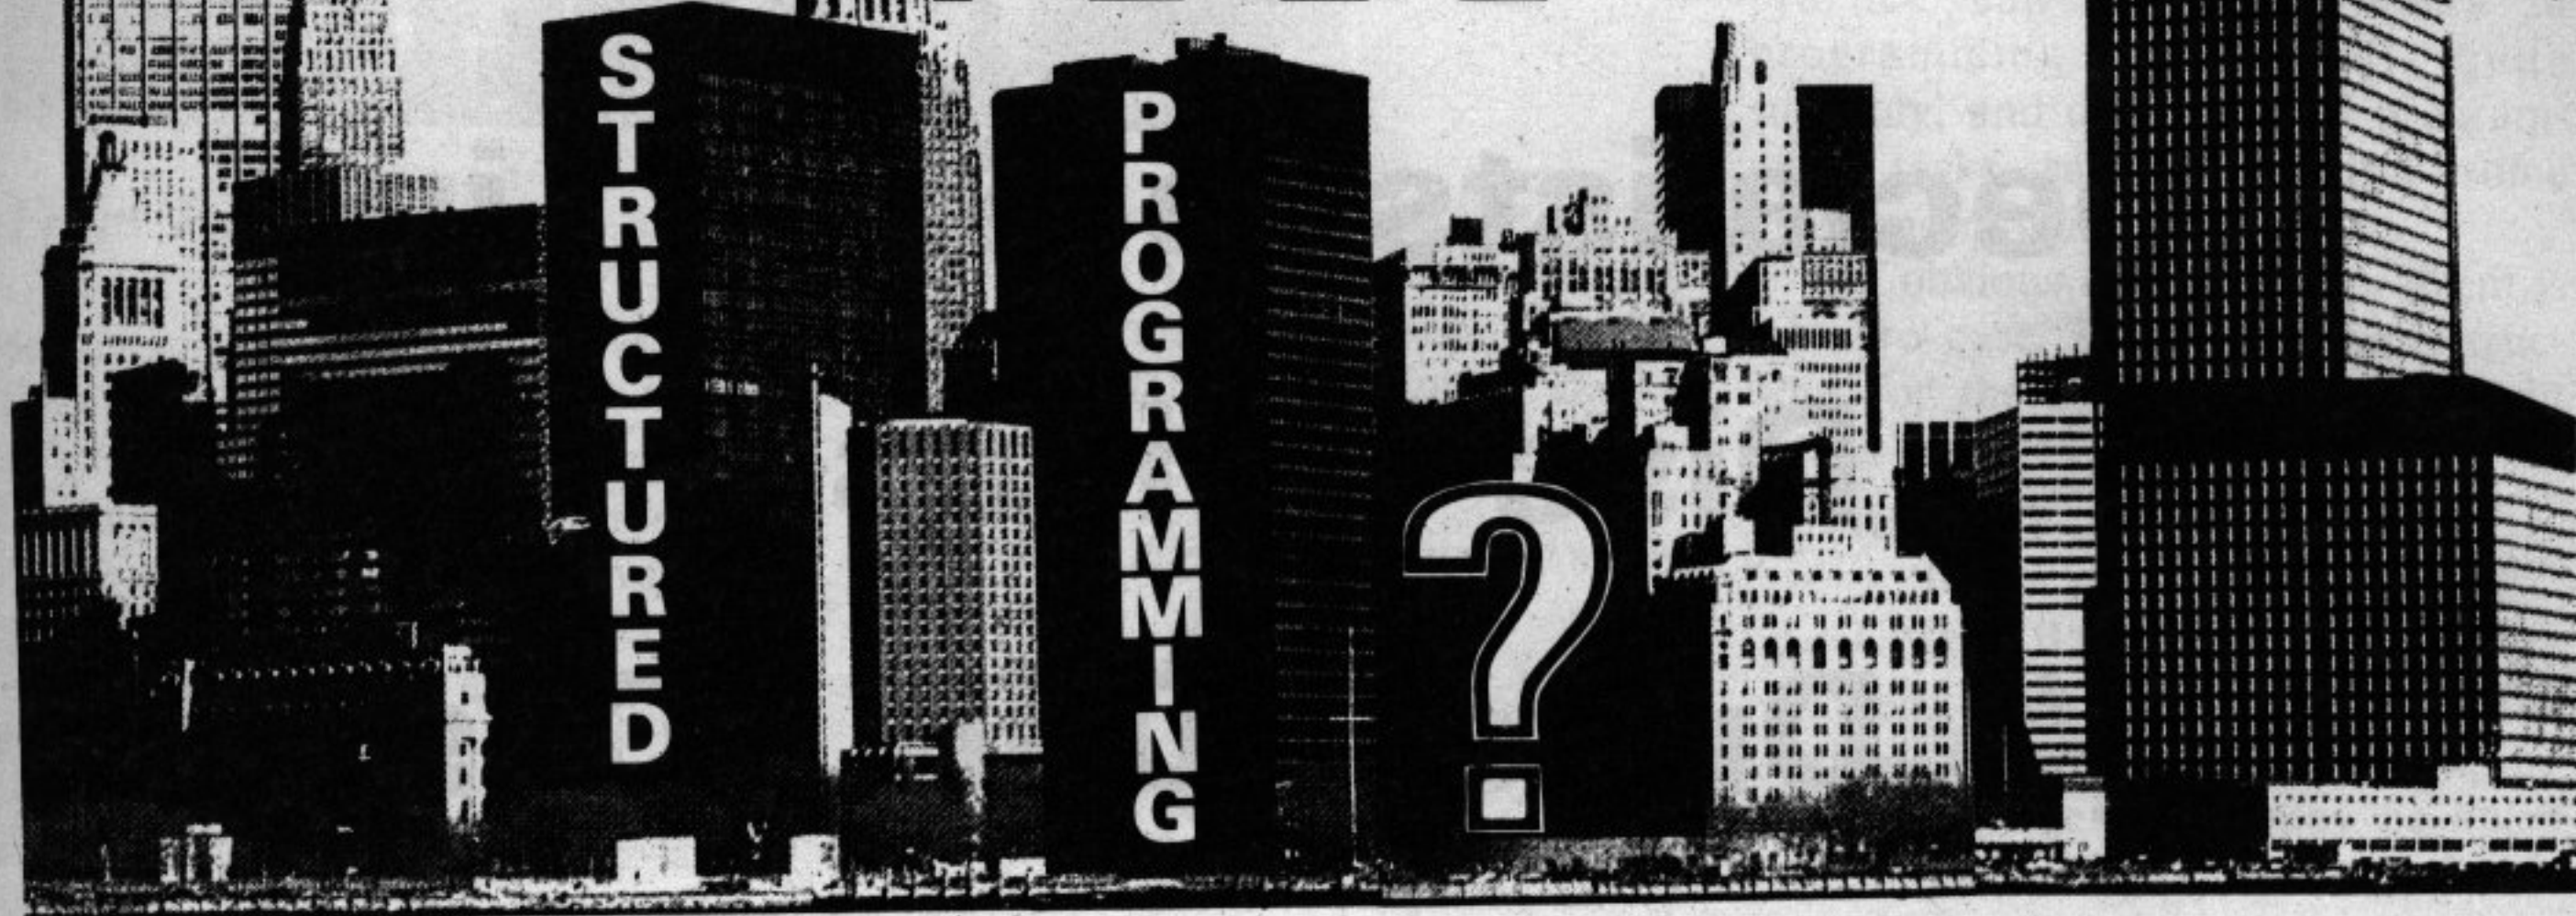

Bad language breaks all the rules

"... a perfect method should not only be an efficient one, as respects the accomplishment of the objects for which it is designed, but it should in all its parts and processes manifest a certain unity and harmony." — An Investigation of the Laws of Thought, George Boole, c. 1850.

A RIGOROUS presentation of the principles of structured programming would be out of place in this article and not very helpful. For example, the use of procedures and a wide understanding of their value and usage probably came well before the refinement of the structured techniques for handling repetition and decision-making.

But structured programming (SP) without proper use of procedures would make little sense in BBC Basic, and they are regarded here as an integral part of the SP method.

Such matters as the choice of names for variables, procedures or other program objects, indenting, the use of upper and lower case, are more to do with style and presentation than control.

But the writer would find it difficult to discuss structured programming without mentioning them. It would be like Abbott without Costello or love without

marriage — possible but not entirely satisfactory.

Strictly speaking, the principles of SP are independent of language. Nevertheless Wirth invented Pascal because he felt that the language syntax should reflect the desired principles.

Christensen took the same idea a stage further with Comal, aiming at

**By ROY
ATHERTON**

ultimately simple forms. More recently Tony Hoare has remarked that a programmer is surrounded by complexity and the language he uses should be a part of the solution, not an additional problem.

Perhaps this series of articles is really about common sense and being systematic, even to the point of elegance. These things are not wholly

objective and this final summary of principles has a personal slant.

The basic trouble with computers is not only that they don't speak our language. They operate differently, sequencing events in time, while we are more at ease with relations in space — writing, mathematical arguments, lists on paper.

A computer program is spread out in space, but the events it describes happen in time. A good programmer eventually learns to look at the static text and imagine the events in time.

As Dijkstra puts it so admirably: "We should do ... our utmost to shorten the conceptual gap between the static program and the dynamic process." But how is it done?

The central idea is that a program should reflect its function at three levels — design, coding and presentation. This makes it easier to look at the program

G.S.L.

Specialists in Slim Line

Disc Drives!!

***5 $\frac{1}{4}$ " Drive 100K. Cased**

Inc. Leads*

£149.95 + VAT

Utility Disc £2.00 + VAT

Disc Interface kits £95.00 + VAT. Price includes manual and Utilities Disc.


(Incorporating the very latest PACE/AMCOM D.F.S.

***AVAILABLE NOW!!**

Geophysical Systems Ltd.

2 North Way, Andover, Hants.

Telephone: (0264) 58744 or 51699

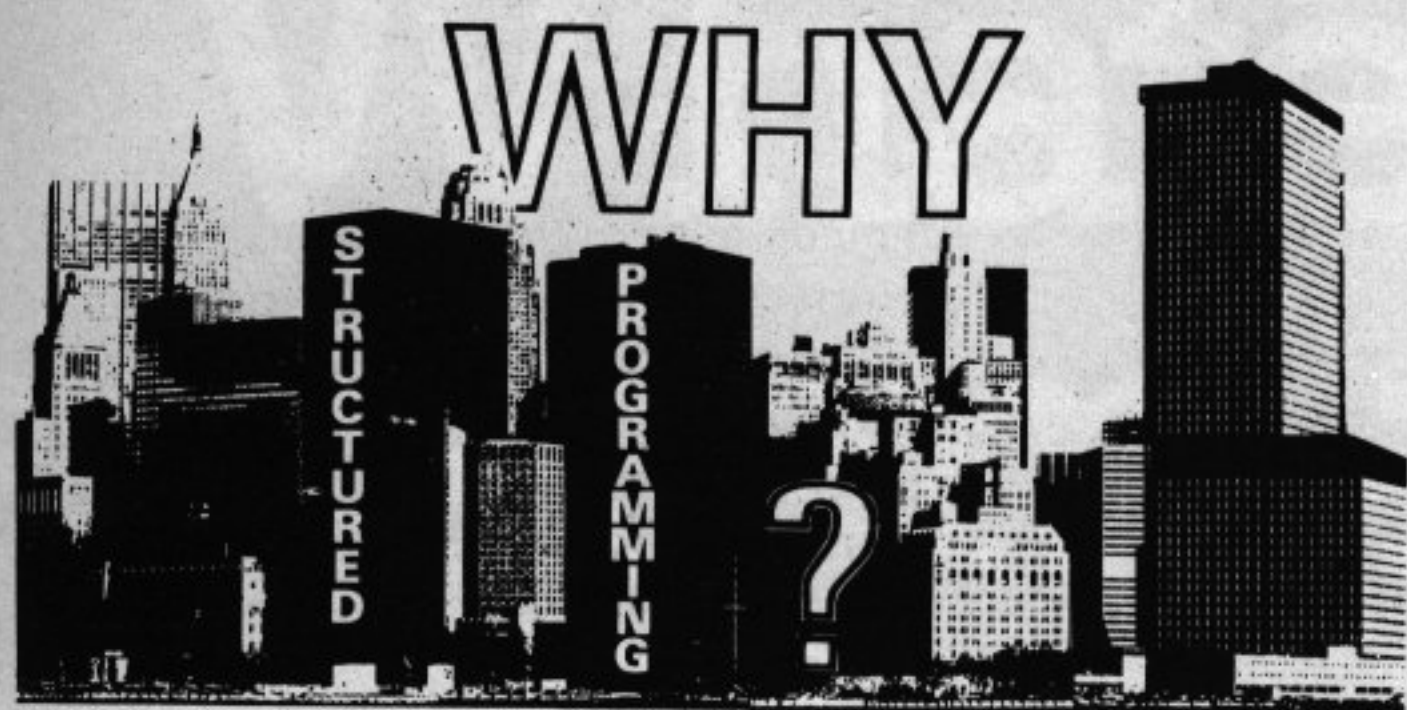

From Page 39

and imagine what it does at execution time.

The rules given here under those three headings may guide a programmer and make achieving this objective much more likely. The rules are not complete – just a good start – and they aim at clarity and correctness.

Alterations to achieve greater speed or compactness can be made later if necessary. This may cause a loss of clarity which can be tolerated, if the original program serves as documentation. Correctness must be preserved throughout all the changes.

Rule 1: Design

- A task should be broken down into a hierarchy of subtasks and each should be a procedure, function or group of these.
- A procedure should be properly and meaningfully named, have one entry point and one exit point.
- Procedure parameters should be chosen with care.
- Within each procedure and in the main program each instance of repetition or decision-making must be identified in the pre-coding analysis.
- The conditions at entry to each loop must be established carefully.
- The condition, simple or compound, for terminating each loop should be properly identified.
- Each loop or decision structure should have a single entry point and a single exit point. No jumping into or out of structures.
- Each program element must be in one of three possible relationships. Elements may be in sequence, controlled, or the subject of procedure calls.

Rule 2: Coding

- The chosen structures for coding should reflect as naturally as possible the program design.
- The order of procedures should reflect, as far as possible, the hierarchical structure of the design. However such items as special

character definitions or stored messages may be placed at the end of the program to reflect their routine nature and fairly low interest. DATA statements should be similarly treated.

- A reasonable overall structure might be:

Main Program

END

Procedures

DATA statements

Exceptionally, small quantities of data might be placed just after the structure which reads them, but the controlling modules should not be cluttered with DATA, PRINT statements, etc.

Rule 3: Presentation

- Keywords must be in upper case. Other program words (variable names, procedure names, etc.) should be in lower case.
- Indenting should reflect structure. (The LISTO facility does not work properly, and indenting must be done with spaces.) If necessary for compactness a second version without indenting may be produced.
- Blank lines or REM statements may be used to give information and help to improve layout. These can be removed in a compact version.
- Multiple line statements should be used with discretion. Overflowed lines should be avoided. Single statements within a structure on one line are reasonable. Several assignments on one line are reasonable, as are combinations of simple actions like MODE or VDU statements.
- Line numbers are necessary for program entry and editing but they may be omitted in the design and publication of programs. If GOTO and GOSUB are not used they lose their importance, except perhaps as a means of reference for discussion. In practice, discussion of a well-structured program is fairly straightforward without the help of line numbers.

The principles and rules may seem numerous and demanding. But the practice is really quite easy if they are

acquired and applied over a period.

This can be as little as a few weeks for an energetic computer buff – or as much as a year or two for a reluctant average ability secondary school pupil.

One thing seems certain. A good grasp of these matters and some practice can enable beginners in programming to take off, quite suddenly, and do non-trivial programming tasks successfully. But some problems remain.

The obvious outstanding problem is the zero case. Remember the instructions for the deputy in the gun fight with a bandit:

REPEAT

Fire a shot

UNTIL Bandit throws out gun.

At least one shot is fired because the condition for exit from the loop is tested at the end. The bandit may be killed quite unfairly. The required structure is one which tests the condition at the beginning of the loop.

WHILE Bandit has gun

Fire a shot

ENDWHILE

If the bandit throws his gun away immediately, no shots are fired. This zero case is as important in computing as the zero symbol is important in arithmetic.

The WHILE structure exists in most modern languages. It was specified at one stage for inclusion in BBC Basic but for some reason, probably memory constraints, it was omitted.

One way to cope with the situation is to use a procedure which is not entered if conditions indicate that no shooting should occur.

**IF Bandit has gun THEN
PROCshoot**

—

—

DEF PROCshoot

REPEAT

Fire a shot


**UNTIL Bandit throws gun
away**

ENDPROC

Other solutions involve either jumping out of or round a repeat loop or simulating the WHILE structure with GOTO.

```
200 REM WHILE
210 IF Bandit has no gun THEN GOTO 240
220 Fire a shot
230 GOTO 200
240 REM ENDWHILE
```

Only by using the procedure as in the first method can the conceptual

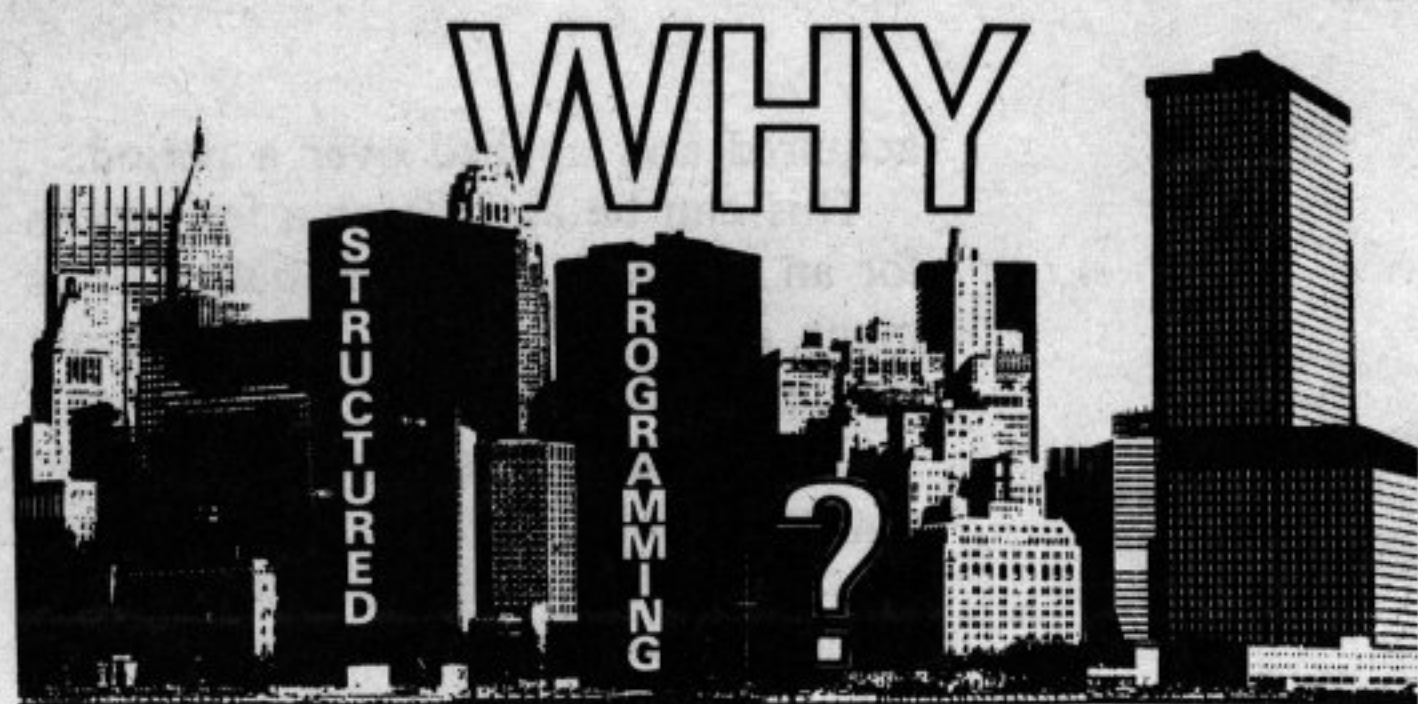

From Page 41

framework of structured programming be properly protected and the integrity of the structures be preserved.

Other methods are tempting but it is dangerous to make exceptions on such a critical question. Whatever one does, the WHILE concept is important in problem analysis and program design.

WHILE (Reason for looping)

Action


ENDWHILE

Using such a structure as syntax helps to make it a part of one's intellectual equipment. That is the real sadness of its omission from Basic.


A second problem arises when programmers have developed a program in which many procedures call other procedures. A structure diagram shows what happens within a module (main program or procedure).

A structure *chart* shows the relationship between modules. Some relationships are permissible and some are not.

See Figure 1.

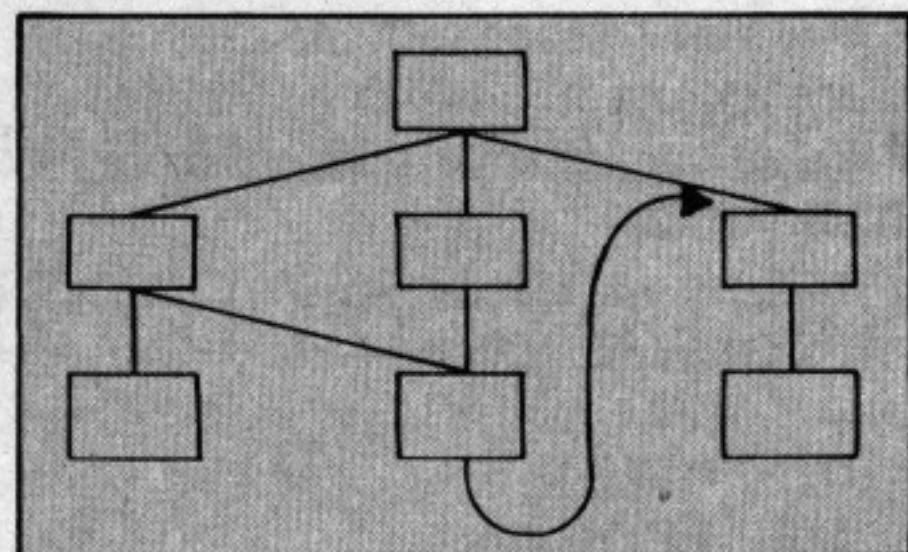

(a) Permissible

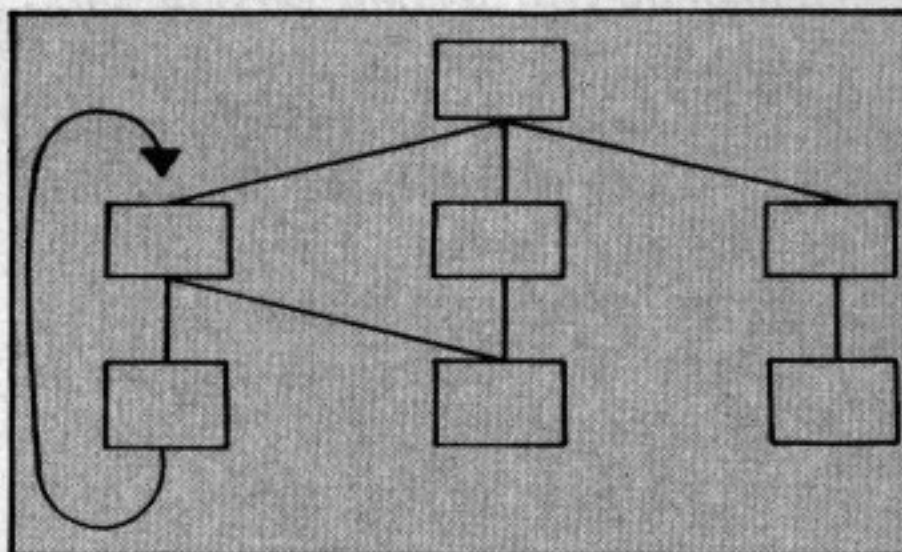

(b) Not Permissible

Figure 1: Structure charts show procedure relationships

The danger is that a procedure may call another which leads to a call back to the first one as in Figure 1(b). This is called concealed or indirect recursion.

Unless recursion is very thoroughly understood or is a central concept of an unusual (but possible) approach to programming it should be avoided.

A properly written recursive program, like quicksort, may be used by a beginner, but special care may be necessary.

Programming in all its forms is a great discipline, like mathematics or writing. It would be absurd to pretend

that a few articles could properly cover such a subject.

Nevertheless there is great value in something well-started and readers who work out these ideas properly should find them rewarding, and a sound basis for any further development if necessary.

Since computers were invented in the 1940s and became commercially viable in the 1950s, ideas about programming have moved a great deal.

In the decades up to the late 1960s progress was quite considerable, but the 1970s brought the structured programming revolution – the widespread acceptance of a framework of ideas for designing languages and working with them.

A programmer sits awkwardly between two complex worlds: the user's problem or task, and the computer system. The complexity of the task may be inherent and unchangeable but a computer system may be good or bad.

A good one will help the user. A good system will include a good language (or package) which not only copes with

good design but also encourages it.

It does this by reflecting in its syntactic forms, faithfully and explicitly, exactly those concepts which are important in the analysis and design stages as well as in the coding.

Thus the programmer is helped to acquire that small but vital common currency of ideas which enhance all the stages of problem-solving with a computer.

A bad language not only fails to help the programmer to write good code. Its wearisome, outmoded confusion often spreads through the programmer's

mind, adds to the complexity of the current problem and fails to illuminate future work with the light of good experience.

A good language can be the source of simplifying ideas which make a program understandable, even elegantly simple.

In the 1970s a critical threshold was established for language design. Below this threshold there is no proper conceptual framework – the programmer has to fight complexity on two fronts.

Above it, the language helps the programmer not only to control his medium effectively, but also gives concrete form to the concepts he needs to help him towards a neat resolution of the problems of analysis, design and to a certain extent, documentation.

BBC Basic rests above this threshold, albeit by a narrow margin, but most popular micro-Basics do not. Therein lies the educational importance of BBC Basic.

It is one of the very few widely available versions of Basic which recognise the fundamental advances of the 1970s in the fields of problem solving and programming.

These good versions correct some of the fundamental serious defects of Basic without destroying the equally fundamental virtues of this old and popular language.

Development continues. SP ideas are very well worked out, but much remains to be done in the areas of data handling and logical inference. Other types of language, such as Prolog, are under development and are highly relevant to these concepts.


The next decade will bring computers which are immensely powerful, portable and, because they will be cheap, plentiful.

Today's computers reflect the intelligence of their designers and software writers. Tomorrow's will take this process of absorbing intelligence to a new order. They will be designed more specifically to do this, and to continue doing it in the hands of their users.

The recent Alvey Report, commissioned by the Department of Industry, calls these fifth generation computers Intelligent Knowledge Based Systems.

If such things come to pass – and it is difficult to see how they might not – the 1970s may be seen as the Iron Age of computing... the first real awakening of what may eventually become a genuinely advanced age of information, for better or worse.

Whatever the system-insist on Kaga monitors

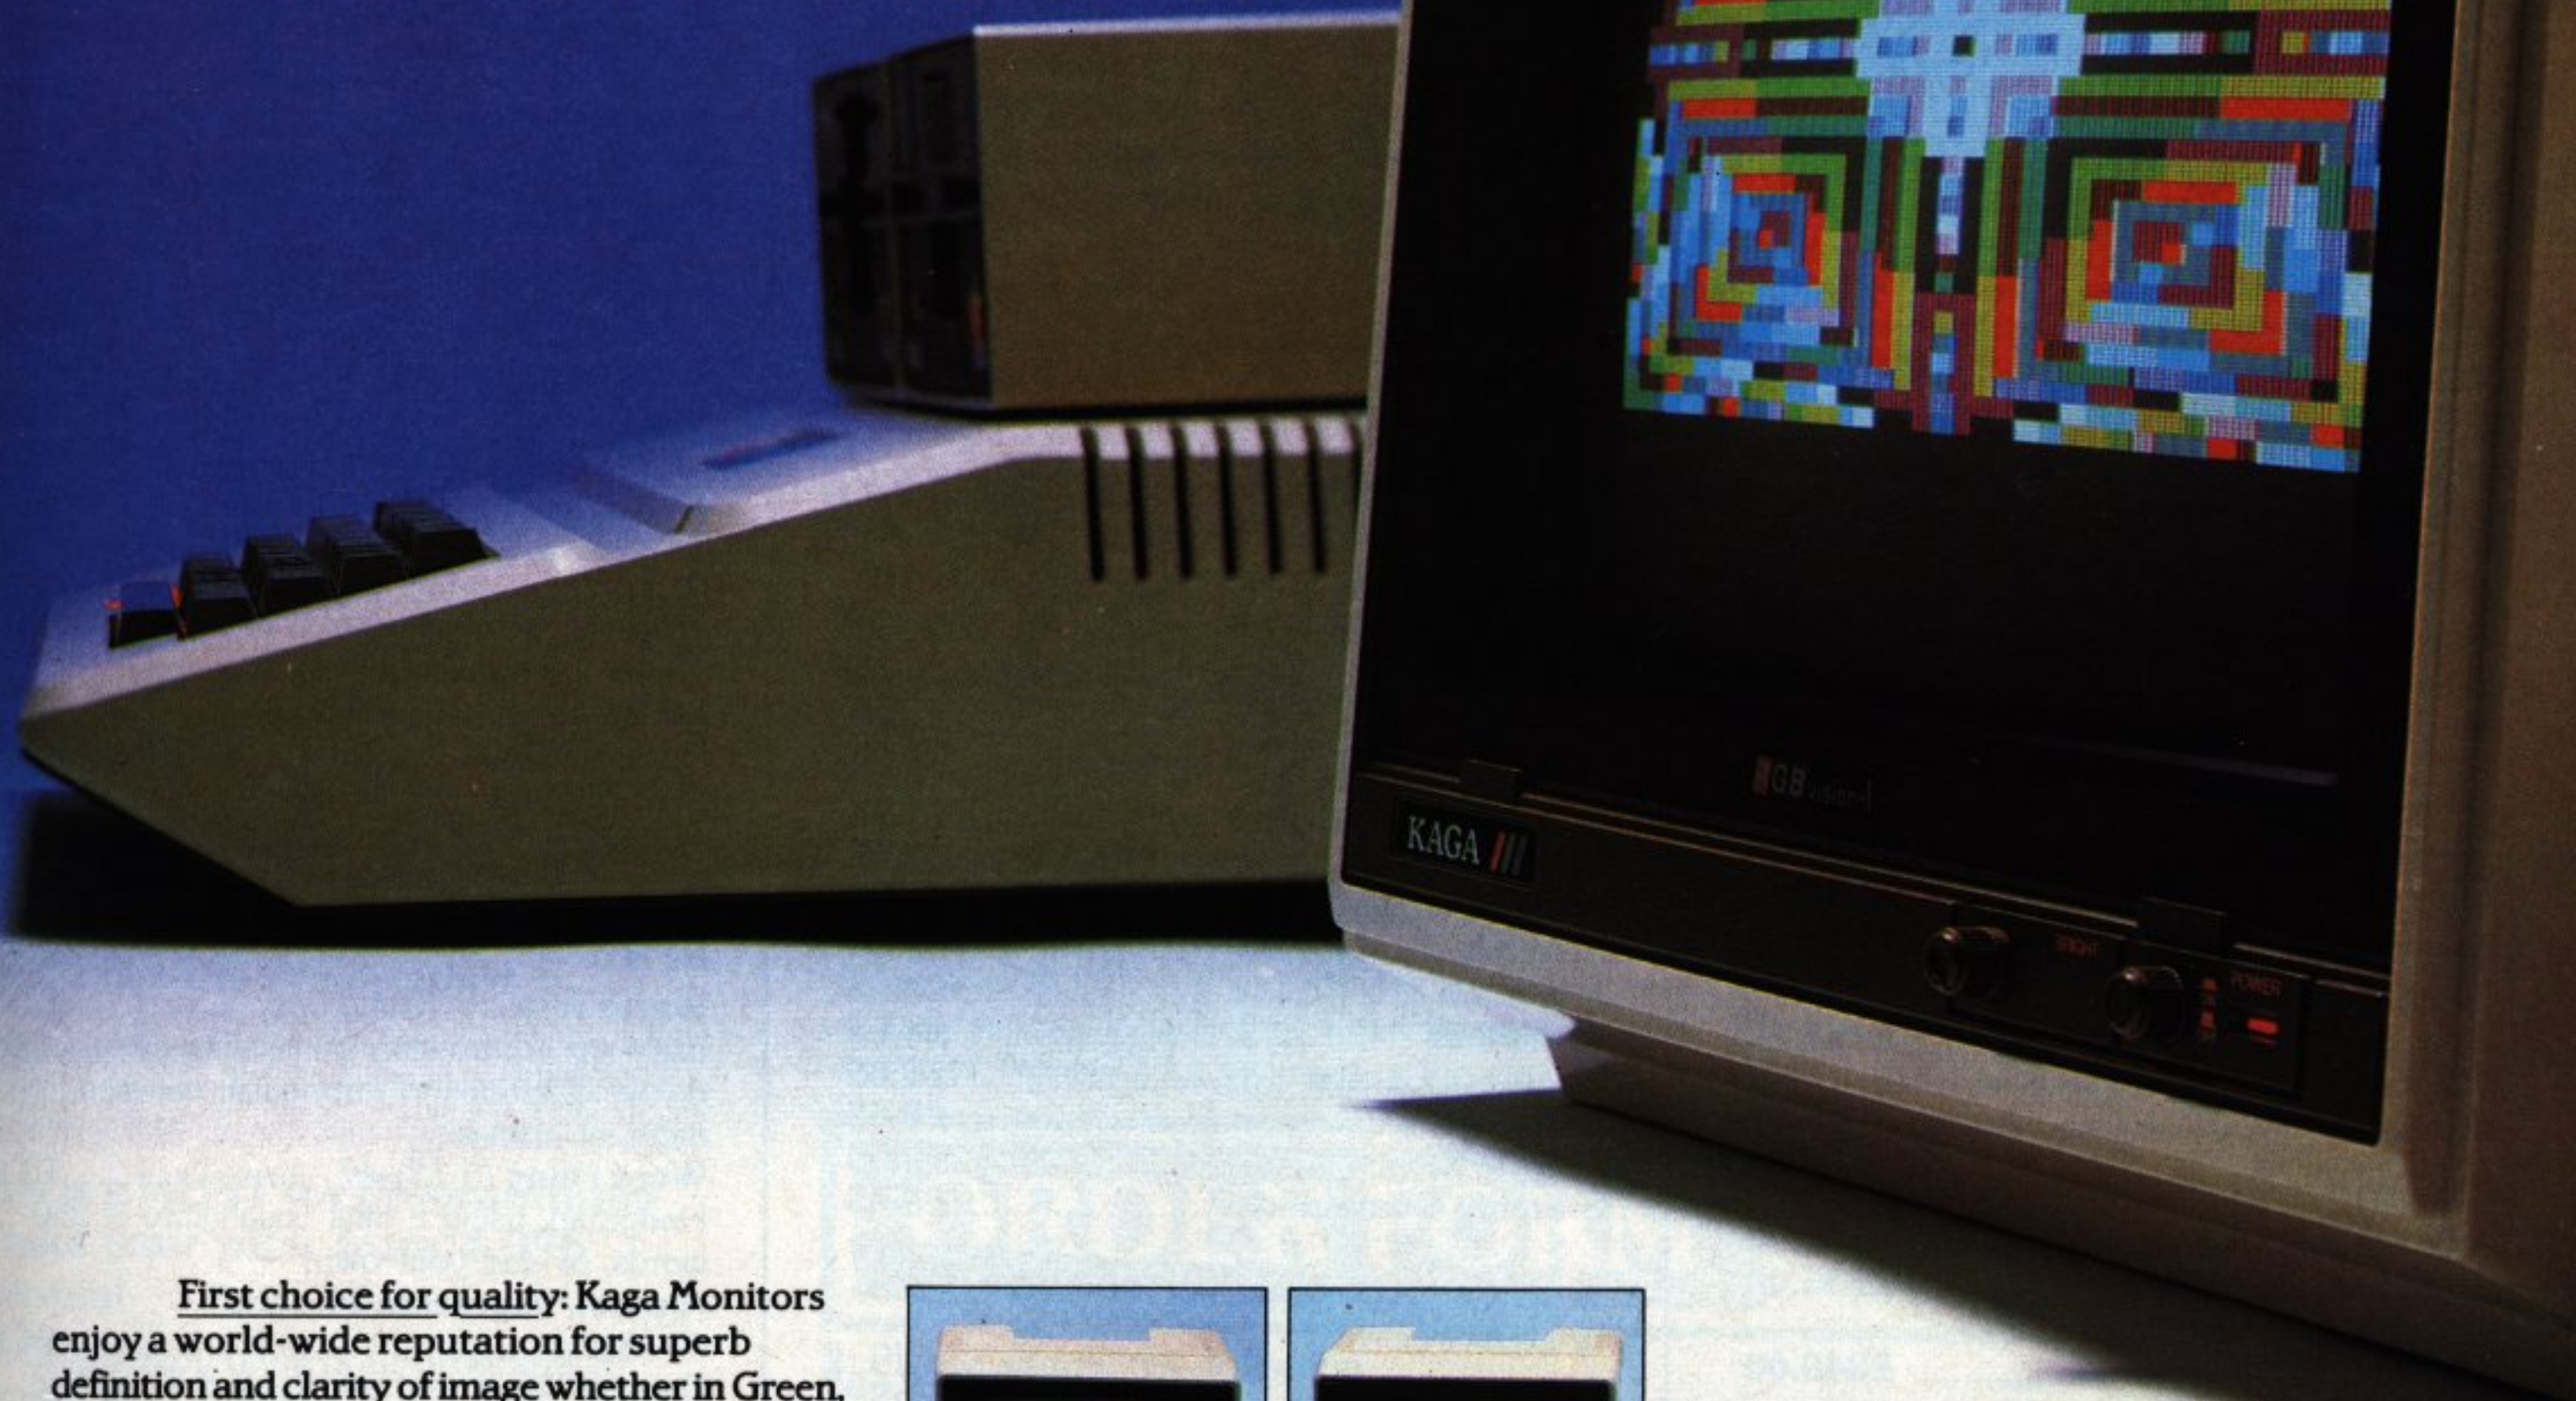

First choice for quality: Kaga Monitors enjoy a world-wide reputation for superb definition and clarity of image whether in Green, Amber, Black and White or full RGB colour.

First choice for value: Kaga quality at Kaga prices makes Kaga unbeatable.

First choice for reliability: Kaga Monitors are specifically designed for use with computers, custom-built for the functions they perform, with solid state circuitry to ensure utmost reliability.

First choice for compatibility: Kaga Monitors are compatible with all popular micro computers. Apple™, Acorn/BBC™, Commodore Pet™, IBM™, Osborne™, Tandy™, you name it, Kaga's made for it. Kaga RGB Monitors have built-in switchable interface allowing simple plug-in compatibility for most micros with RGB output. And the wide range of Kaga models



means there's a Kaga ideally suited to your individual needs, whatever your computer.

First choice for availability: Wherever you are, there's a Data Efficiency Kaga dealer close at hand to advise and help you before and after you choose your Kaga Monitor. Ring 0442 60155 for details of your nearest stockist.

Kaga Models and Prices:

RGB Monitors from around £264 (retail)
Monochrome Monitors from around £99 (retail)
Apple II RGB Adaptor and RGB Cables for most popular micros are available.

Prices ex-VAT and correct at time of going to press

Trade and OEM enquiries welcome

DON'T SETTLE FOR SECOND BEST - INSIST ON KAGA TO COMPLETE YOUR SYSTEM



DE
Data Efficiency Ltd

For all your Micro needs...and more. (0442) 60155

National Micro

DATA STORAGE

A data cassette recorder that perfectly matches the BBC Micro.

£34.74

Carriage £2.50



Fully compatible with the BBC Micro and specifically designed for data saving and loading, the Pye data cassette recorder (with free power pack and BBC lead) is guaranteed to end your data storage and retrieval problems.

A low cost answer to high speed data retrieval!

£135.00

Carriage £3.50



Are you frustrated by your cassette system but find the disc drive alternative too costly? Then what you need is The Hobbit.

The Hobbit is a high quality, ultra fast, fully automatic micro cassette drive specially designed for the BBC Microcomputer. It reads and writes data at 7500 Baud – more than sufficient for most needs and about seven times faster than a cassette recorder. It has a proper directory, like discs and a file space of 101k. All this, for approximately half the price of a disc system.

Cumana disc drives

Including integral power supply

Cumana CS50 A 100k Single
(40 track) **£178.26**

Cumana CD50A 200k Dual
(40 track) **£347.83**

Pace Slimline disc drives

Pace PSD1 100k Single **£185.00**

Pace PSD2 200k Single **£235.00**

Pace PSD3 400k Single
(40/80 track, switchable) **£345.00**

Pace PDD1 200k Double
(40 track) **£338.00**

Pace PDD2 400k Double
(40 track) **£449.00**

Pace PDD3 800k Double (40/80 track, switchable) **£610.00**

All the above drives are cased in metal to prevent interference and data loss.

Carriage on disc drives £3.50

Personal shoppers can obtain the products advertised on these pages from the following retail stores:

Stockport Micro Centre
4/6 Brown St., Stockport,
Greater Manchester.
Tel: 061-480 0539

Wilmslow Micro Centre,
62 Grove Street.,
Wilmslow, Cheshire.
Tel: 0625 530891

High-quality discs from BASF

Single sided, single density
(box of 10) **£16.09**
Double sided, double density
(box of 10) **£26.04**
Blank data cassettes (box of 10) **£4.35**

Disc utilities

If you're upgrading to disc you must get **Replica**. It enables you to easily transfer your existing cassette programs to disc and stores 8-10 programs. Both 40 and 80 track versions are available (please state which you require). Fully compatible with the Amcom DFS. **£8.65**

A comprehensive utility providing a number of essential facilities is **The Key**. This multi purpose disc enables you to back up existing discs (including most of the protected ones), retrieve deleted files and edit your own discs. State whether you require the 40 or 80 track version. **£11.26**

SOFTWARE

We stock games from all the major software houses. Below are some of our best sellers:

ACORNSOFT

Sphinx Adventure **£8.65**
Philosophers Quest **£8.65**
Castle of Riddles **£8.65**
Countdown to Doom **£8.65**
Rocket Raid **£8.65**
Arcade Action **£10.35**
Snapper **£8.65**
Monsters **£8.65**
Arcadians **£8.65**
Business Games **£8.65**
Snooker **£8.65**
Missile Base **£8.65**
Starship Command **£8.65**

NEW! NEW! NEW! NEW! NEW! NEW!

Hopper **£8.65**
Hop the frog to safety through a variety of dangers. Complete with music and full sound effects.
JCB Digger **£8.65**
You are in charge of a JCB, which can move in four directions and dig holes to trap the attacking Meanies.
Carousel **£8.65**
Shoot down ducks, rabbits and owls as they move across the screen. Full sound effects.

MICRO POWER

Swoop **£6.95**
Alien Destroyers **£6.95**
Galactic Commander **£6.95**
Timetrek **£6.95**
Lazer Command **£6.95**
Space Maze **£5.95**
Demon Decorator **£5.95**
Astro Navigator **£4.95**
Maze Invader **£4.95**
Startrek **£4.95**
Moon Raider **£6.95**
Killer Gorilla **£6.95**
Croaker **£6.95**

A&F

Painter **£8.00**
Frogger **£8.00**
Planes **£8.00**
Howzat **£8.00**
Shrinking Professor **£8.00**

DIGITAL FANTASIA

Golden Baton **£8.95**
The Time Machine **£8.95**
Arrow of Death Pt 1 **£8.95**
Arrow of Death Pt 2 **£8.95**
Escape from Pulsar 7 **£8.95**
Circus **£8.95**
Feasibility Experiment **£8.95**
Wizard of Akyrz **£8.95**
Perseus and Andromeda **£8.95**
Ten Little Indians **£8.95**

COMPUTER CONCEPTS

Snake **£6.91**
Android Attack **£7.78**

We have a wide range of educational programs for use in the home as well as at school. This is just a selection:

ACORNSOFT

Sentence Sequencing (8-12 yrs) **£10.35**
Word Sequencing (7-12 yrs) **£10.35**
Two programs to assist in the development of English, involving the altering of words and sentences to form logical phrases within a time limit set by the supervisor. Twenty results can be stored.
Tree of Knowledge (6-12 yrs) **£8.65**
Allows the building up of data about objects for the computer or child to guess.
Missing Signs (8-10 yrs) **£10.35**
Number Balance (8-10 yrs) **£10.35**
Two mathematical programs capable of testing different levels of ability.

BES

World Wise (7-15 yrs) **£7.80**
Build up information on geography and then define questions to distinguish between different entries.
Word Hang (5-13 yrs) **£7.80**
Hangman, using a built vocabulary of 250 words, or add your own.
Animal/Vegetable/Mineral
(7-13 yrs) **£4.95**
Data can be stored and reused if required.
Happy Numbers (4-6 yrs) **£7.80**
For young children, this program allows you to learn numbers from 1 to 9. All entries are recorded to help identify problems.
Timeman One (4-6 yrs) **£7.80**
Teaches children to tell the time.

H&H SOFTWARE

Signals and Magic (8-12 yrs) **£8.50**
An entertaining program to teach addition, subtraction and multiplication.
Early 1, 2 and 3 (5-7 yrs) **£6.50**
English programs in varying degrees of difficulty.

MICRO POWER

World Geography (12-15 yrs) **£5.95**
Capitals and populations of most countries of the world.
Where (12-15 yrs) **£5.95**
A geographical program to test students' knowledge of rivers, towns and mountains in Britain. The program also measures response times and gives user friendly messages throughout.

MICROS

No waiting!
Phone in your
order for the
BBC Micro
before 12 noon
and we will
despatch same day!



BBC Model B Latest specification
OS 1.2 **£346.00**
Carriage £7

BBC Model B Includes Pace disc
interface fitted free in our own
workshops **£430.00**
Carriage £7

Be one of
the first to
own the
electrifying
Electron!



The baby brother of the BBC Micro has been hailed by the computer press as a big breakthrough in power and price. This exceptional machine is already being forecast to be the top-selling micro of 1984. It comes complete with an introductory cassette of 15 programs, a very comprehensive user guide and an easy to understand DIY book on programming.

Acom Electron **£173.00**
Carriage £7

Stocks are limited, so it's very much a case of first come first served. We promise that no cheques will be cashed until the machine is despatched.

CHAMELEON

This is a **MUST** for programmers - take your pick from 4,096 colours!

Let Chameleon bring your programs to life with truly authentic colours. Mix and match the exact shades you require to give new depths of realism to your graphics. Choose from all the colours of the rainbow - and more! Its that simple ... with this amazing hardware add-on for the BBC Micro. *Phone for details.*

TV version now available.

RGB version **£77.40**
TV version **£86.08**

JOYSTICKS

By-pass your keyboard and achieve more positive control and greater realism with the use of joysticks.

Self Centring **£17.35**
Non self centring **£15.60**
Clare's Joystick Utilities program **£4.35**
Converts most non-joystick games for use with joysticks.

WORD PROCESSING
ON THE BBC MICRO

A unique, low-cost approach to word processing for home and business use.

BBC MODEL B **£346.00**
The versatile highly expandable computer for home and business use.

WORDWISE **£36.00**
The word processor on a chip incorporating many features normally only found on more expensive systems.

SILVER-REED EX44
Typewriter/Printer **£369.50**
A letter quality printer which can also be used as a high quality electric typewriter.

THE HOBBIT **£135.00**
The low cost answer to saving standard letters and forms for future use.

GREEN SCREEN
MONITOR **£109.00**
A high quality monitor for when the television is otherwise occupied.

Total **£995.50**

Special system price **£910.00**

ROM CHIPS

These programs-on-a-chip give speedy access for word processing and financial reports.

Wordwise **£36.00**
The standard word processing package for the BBC Micro. Automatic word count and full text control. Easy to install chip for extra reliability and ease of use.

Beebcalc **£34.00**
A powerful ROM-based spreadsheet with many special features, including the ability to transfer sheets to Wordwise for inclusion in reports.

PRINTERS

Epson RX80 **£268.00**
Dot matrix, 100 cps, graphics, 10" max. width. Tractor feed only.

Epson RX80FT NEW! **£319.00**
This new low cost Epson has all the features of the RX80, plus friction feed for single sheet processing.

Epson FX80+ **£391.00**
Dot matrix, 160 cps, graphics, 10" max. width. Tractor and friction feed.

Epson FX100 NEW! **£495.00**
All the features of the FX80+ with 16" carriage width. A must for the small businessman

Silver Reed EX44 **£369.50**
A superior electronic typewriter that is also a high quality daisywheel printer. Supplied with interface for the BBC Micro.

Carriage on printers £7

MONITORS

Microvitec high resolution **£403.00**
Microvitec low resolution **£249.00**

Kaga 12" amber screen high resolution **£119.00**

Kaga 12" green screen high resolution **£109.00**

Zenith green screen **£75.00**

Nordmende 14" monitor and portable TV **£218.00**

RGB lead for Nordmende **£5.20**
Specifically designed for use both as a monitor and a television (not just a modified TV), the Nordmende represents a perfect answer to the over-use of the domestic TV - at a price less than many comparable colour monitors. Add £7 for carriage.

Attractive credit terms

Phone for details

ORDER FORM

Post to:
NATIONAL MICRO CENTRES
National House, Newby Road,
Stockport SK7 5DA

Please supply the following:

Item	Qty	Total £ p
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....

VAT 15%

Carriage

TOTAL

Please indicate method of payment

☐ Cheque payable to
National Micro Centres

☐ Access/Barclaycard No.

Name

Address

.....

.....

Tel. No.

Signed

SCIENCE

THIS month we are going to look at drawing circles on the BBC Micro. It would be nice if we had a CIRCLE command which would allow us to specify the coordinates of the centre of the circle and the radius we want it to be. Unfortunately the BBC Micro does not have such a command.

We can, however, design a general purpose procedure to do it – once we're sure exactly what we want to do and how to do it!

The mathematics behind drawing circles takes a lot of working out, but you don't have to understand the sums to be able to use them effectively.

The secret lies in the use of triangles. Thousands of years ago man found that he could survey land by the technique of triangulation.

Any piece of land could be approximately divided into a set of triangles. You could then measure those triangles and find the total area.

What we're going to do is to divide the circle into triangles, which we can then fill with our PLOT85 command – we'll see exactly how later.

First of all let's look at a particular set of triangles that should help us to do the job properly – right angled triangles.

In them, one of the sides sticks out vertically from the other – a carpenter would say that the two sides are square to one another. Mathematically speaking, the two sides are at 90 degrees to each other – a right angle.

Actually, we've been using right angled triangles throughout these articles to give our X and Y coordinates. The reason you haven't noticed is that we haven't drawn in the third side.

Figure 1 illustrates the point. The X and Y we use to give us our

Triangular tour that leads us round in circles

coordinates are two sides of a right angled triangle.

Notice the following:

- The sides we take as X and Y are the two that are at right angles to each other.
- We mark the fact that they are at right angles with the sign "r".
- The third side of the triangle is opposite the right angle. We call that side the hypotenuse – though I've labelled it R to make things easier! It is R graphic units long.
- I've marked one of the angles θ .

The thing about right angled triangles is that if you know what R and θ are you can easily work out X

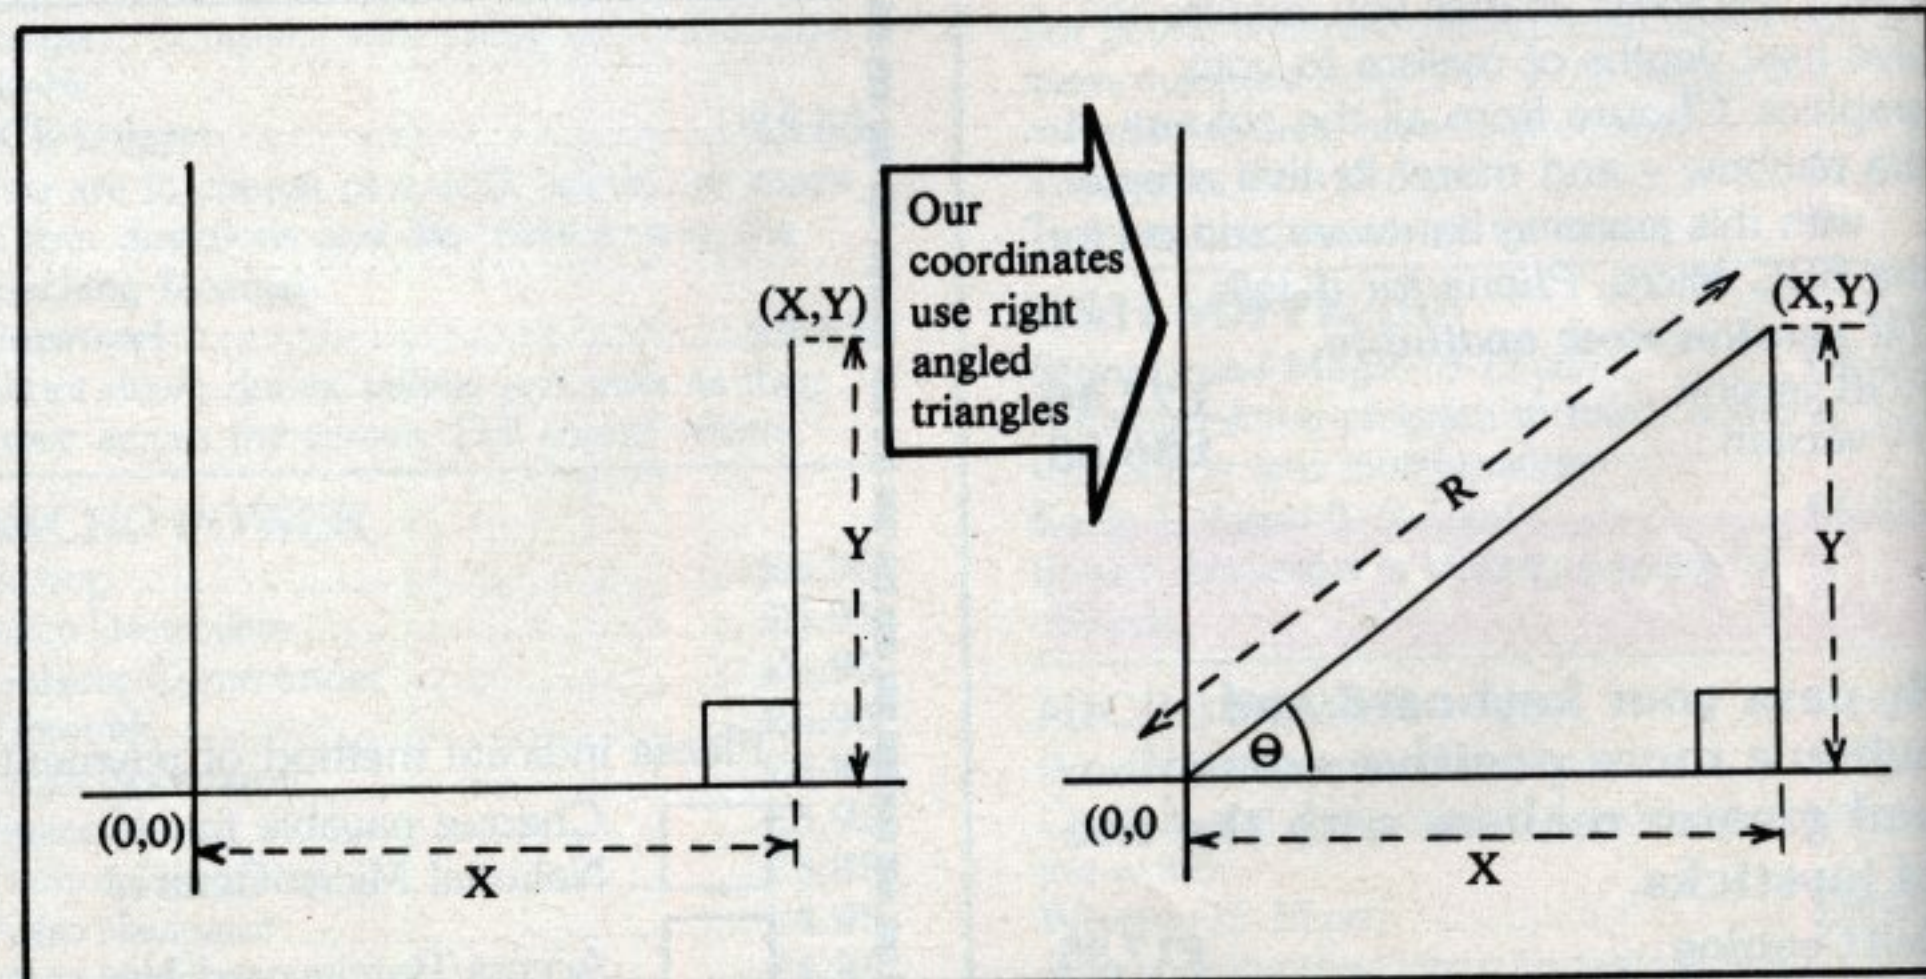


Figure 1

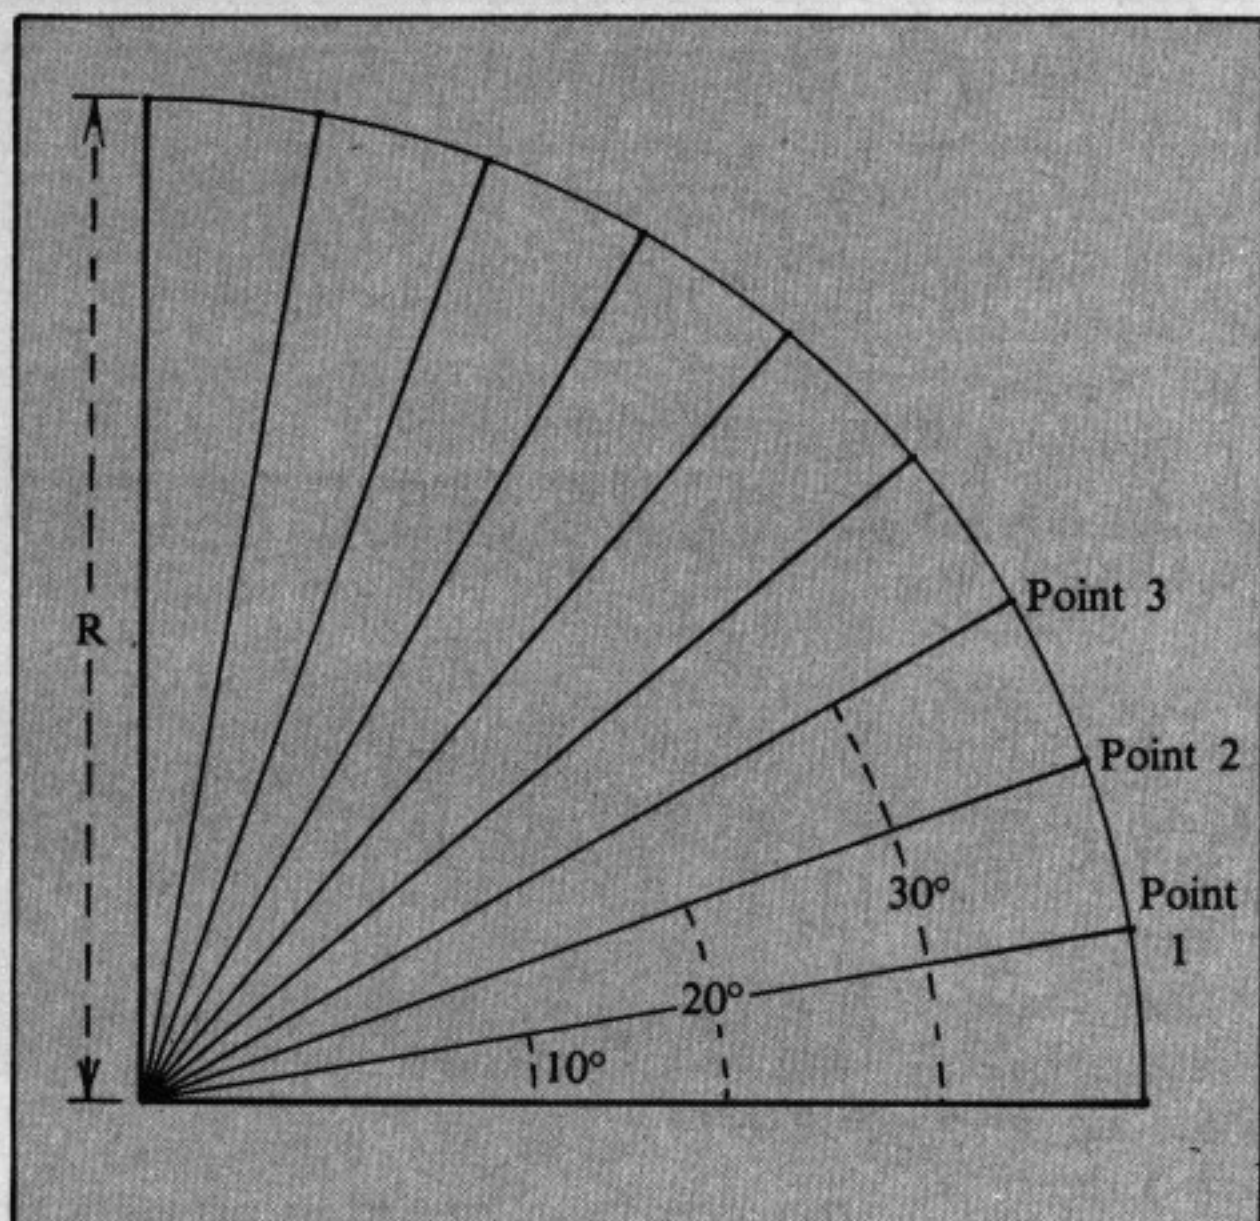


Figure IIa

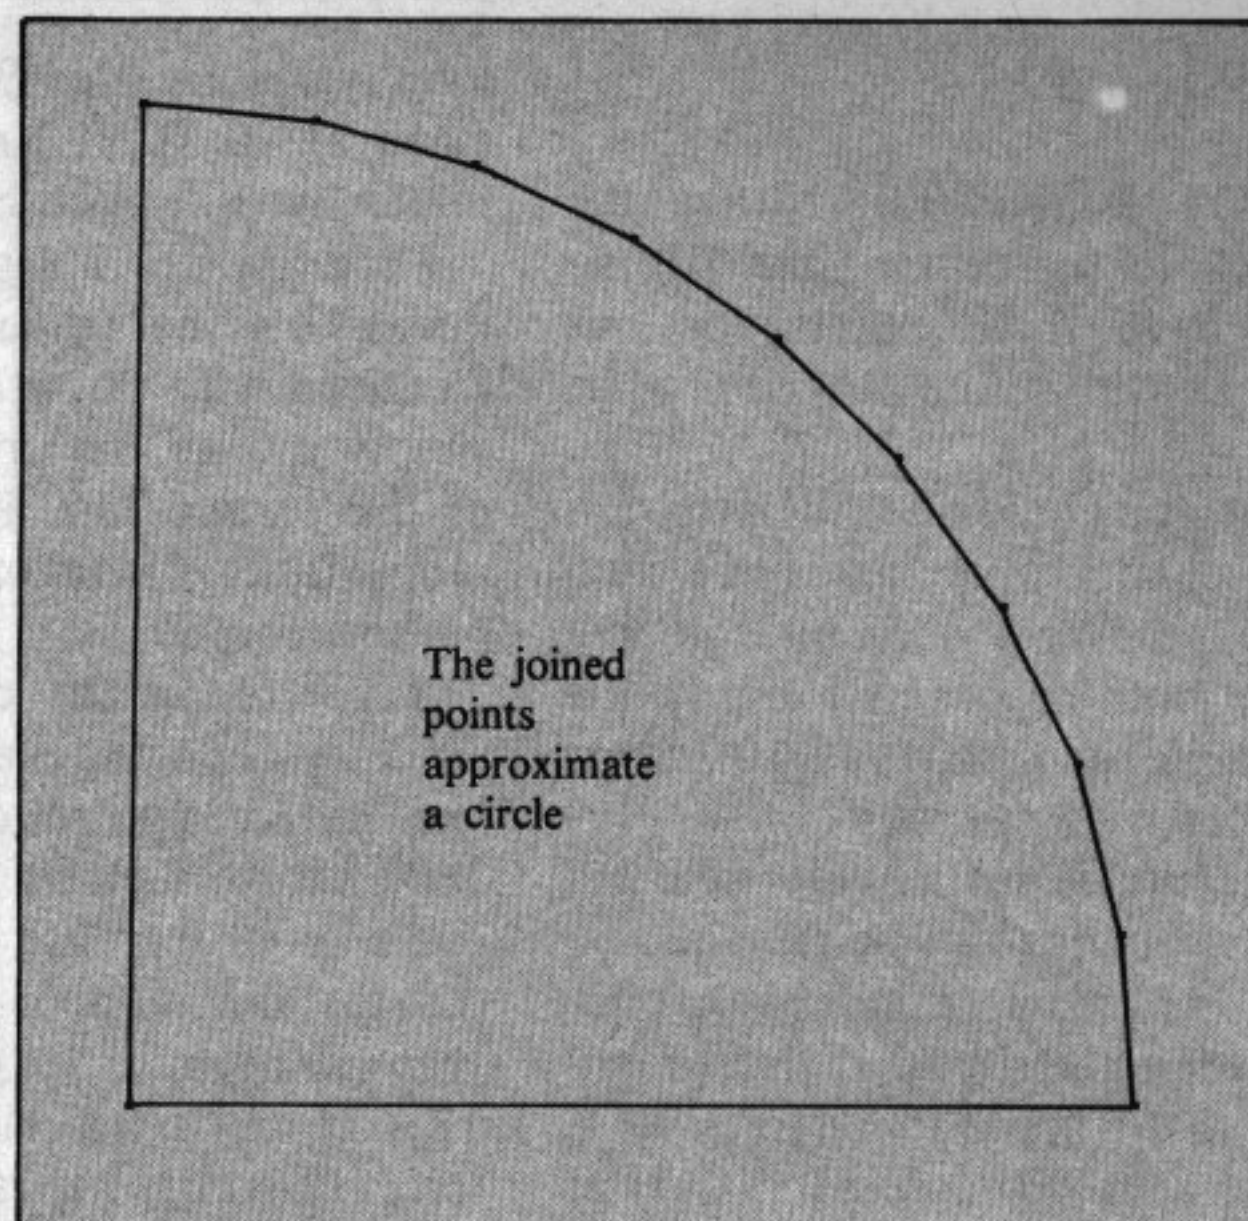


Figure IIb

and Y's values. We use two of BBC Basic's functions, SIN() and COS().

Then, for any particular R and Θ :

$$X=R*\cos(\Theta)$$

$$Y=R*\sin(\Theta)$$

Let's not worry exactly how it works, but just put it to work.

The idea is that we can now represent any point on the screen by using either X,Y coordinates – called cartesian coordinates – or by using R and Θ – called polar coordinates.

It happens that we can draw circles more easily thinking in terms of polar coordinates.

The trick is that every point on the circumference, or edge, of the circle is the same distance from the centre – so for a circle R will remain the same length for all its points. That's why we're using R : R for radius.

All we have to do to specify a particular point on the circumference is to give the value of Θ that "points" the radius at it.

Figure II shows how we can use this to draw a quarter circle.

Figure IIa illustrates how we can divide the right angle up into nine steps of 10 degrees.

In our old system of coordinates:

Point 1 is $(R*\cos(10), R*\sin(10))$

Point 2 is $(R*\cos(20), R*\sin(20))$

and so on – ideal for loops that go up in intervals of 10 degrees.

If we join all these points together with straight lines, as in Figure IIb, you can see that the shape we obtain,

By PAUL JONES

though not a circle, is fairly close to one.

If we had gone up in steps of five degrees the "fit" would have been even better.

This is how we draw circles. We calculate the points on the circumference using SIN() and COS(), then join them with straight lines.

Provided we choose our values properly, the approximation to a circle is close enough for most purposes.

Program I draws a quarter circle. Here, instead of R we've used radius% and set it equal to 1024 (line 30).

Line 40 initialises the program by moving the graphics cursor out to the circumference of the circle.

Instead of Θ we are using angle% and lines 50-80 form a loop in which angle% increases in steps of 10 degrees.

Unfortunately the BBC Micro measures angles not in degrees, but in radians. To use SIN and COS, the angle must be in radians.

We don't have to worry about this since the micro provides us with a function to convert our usual degrees to radians, RAD().

We use this in line 60 to change angle% in degrees to angle in radians.

Note that we cannot use an integer

variable for angles expressed in radians – they don't go in nice whole numbers!

The conversion done, line 70 then draws a line to the point specified by that angle.

radius%*COS(angle) corresponds to $R*\cos(\Theta)$

radius%*SIN(angle) corresponds to $R*\sin(\Theta)$

Program II again draws a quarter circle, this time filling in the triangles

```
10 REM ***PROGRAM I***
20 MODE 4
30 radius%= 1024
40 MOVE radius%.0
50 FOR angle%= 0 TO 90 STEP 10
60 angle=RAD(angle%)
70 DRAW radius%*COS(angle),radius%*
SIN(angle)
80 NEXT
```

Program I

```
10 REM ***PROGRAM II***
20 MODE 4
30 radius%= 1024
40 MOVE radius%.0
50 FOR angle%= 0 TO 90 STEP 10
60 angle=RAD(angle%)
70 MOVE 0,0
80 PLOT 85, radius%*COS(angle),radi
us%*SIN(angle)
90 NEXT
```

Program II

From Page 47

with PLOT85 (line 80). Notice the move back to the centre (line 70), so that we have three points for our triangle. Leave it out to see what happens.

Perhaps you could alter the program to a four colour mode, and have each triangle plotted in a different colour.

Also, in both programs I and II, the loop variable can start at 10 rather than 0. Can you see why?

Quarter circles are all very well, but how do we manage full circles?

If you cast your mind back once again to schooldays, you might remember that there are 360 degrees in a circle. There are 90 degrees in a quarter circle – a full circle is four times bigger, 360 degrees.

All you have to do is to make the

```
10 REM ***PROGRAM III***
20 MODE 4
30 radius%=512
40 GCOLOR,1
50 VDU29,640;512;
60 MOVE radius%,0
70 FOR angle%=0 TO 360 STEP 10
80 angle=RAD(angle%)
90 MOVE0,0
100 PLOT85,radius%*COS(angle),radius%*SIN(angle)
110 NEXT
```

Program III

```
10 REM ***PROGRAM IV***
20 MODE 5
30 FOR radius%=512 TO 512/4 STEP -512/4
40 colour%=colour%+1
50 PROCcircle(640,512,radius%,colour%)
60 NEXT radius%
70 END
80 DEF PROCcircle(xpos%,ypos%,radius%,colour%)
90 LOCAL angle%,angle
100 GCOLOR,colour%
110 VDU29,xpos%;ypos%;
120 MOVE radius%,0
130 FOR angle%=0 TO 360 STEP 10
140 angle=RAD(angle%)
150 MOVE0,0
160 PLOT85,radius%*COS(angle),radius%*SIN(angle)
170 NEXT
180 VDU29,-xpos%;-ypos%;
190 ENDPROC
```

Program IV

loop variable, angle%, go to 360 instead of 90. SIN() and COS() automatically take care of things for you.

Program III illustrates the technique. The actual calculation of points is identical with Program II. We have simply moved the origin to the centre of the screen (line 50), decreased the radius (line 30) and made the high loop parameter 360.

Try altering the coarseness of the circle by changing the value of STEP in line 70. Keep to numbers that go into 360 evenly, such as 15,20,30 and 60.

As you increase the step, which reduces the number of points joined, you will begin to see that what appears as a circle is actually made up of a series of straight lines. Such a figure is known as a polygon.

What value of step gives you the six-sided figure called a hexagon?

Program IV uses PROCcircle, a general circle drawing procedure with the following parameters:

xpos% and ypos% give the coordinates of the centre of the circle.

radius% gives the radius

colour% gives the logical colour number of the circle.

The way the procedure works is identical to Program III, except that at the end of the procedure the graphics origin is moved back to its original position (line 180) – a “tidying up” operation.

The main body of the program (lines 10 to 70) calls the procedure four times for four decreasing radii (line 30).

Could you alter the program to, say Mode 2, and have circles of all the colours?

How about giving the circles different origins?

Finally, can you alter PROCcircle so that it just draws the circumference of the circle?

If you start to draw a circle and as you do so, gradually decrease the radius, what happens?

It's not too hard to see that the edge of the “circle” starts to spiral inwards.

This is the technique we use in Program V. The loop (lines 70-140) repeatedly calculates points on a “circle” (line 100), the radius of which is shrinking as radius% decreases (line 130).

Program VI produces the same spiral but then uses VDU19 to alter the assignments of logical colours so that the colours of the spiral's segments appear to rotate.

After a suitable delay each segment

```
10 REM ***PROGRAM V***
20 MODE 2
30 VDU 29,640;512;
40 radius%=512;counter%=1
50 angle%=18
60 MOVE radius%,0
70 REPEAT
80 MOVE 0,0
90 GCOLOR,counter%
100 PLOT 85,COS(RAD(angle%))*radius%,SIN(RAD(angle%))*radius%
110 counter%=counter% MOD 7+1
120 angle%=angle%+18
130 radius%=radius%-4
140 UNTIL radius%<0
```

Program V

transfers its colour to its neighbour on one side while adopting the colour of its neighbour on the other side. Hence the colours gradually appear to move from segment to segment giving the illusion of rotation.

You might like to try a similar technique to make waves of colour flow across the circles of Program IV.


NEXT MONTH we shall delve more into the world of GCOLOR.

```
10 REM ***PROGRAM VI***
20 MODE 2
30 VDU 29,640;512;
40 radius%=512;counter%=1
50 angle%=18
60 MOVE radius%,0
70 REPEAT
80 MOVE 0,0
90 GCOLOR,counter%
100 PLOT 85,COS(RAD(angle%))*radius%,SIN(RAD(angle%))*radius%
110 counter%=counter% MOD 7+1
120 angle%=angle%+18
130 radius%=radius%-4
140 UNTIL radius%<0
150 REPEAT
160 FOR loop%=1 TO 7
170 VDU 19,loop%,(counter%+loop%)MOD 7+1,0,0,0
180 NEXT loop%
190 FOR wait%=1 TO 200:NEXT wait%
200 counter%=counter%+1
210 UNTIL counter%>200
220 REPEAT
230 FOR loop%=1 TO 7
240 VDU 19,(counter%+loop%)MOD 7+1,loop%,0,0,0
250 NEXT loop%
260 FOR wait%=1 TO 200:NEXT wait%
270 counter%=counter%+1
280 UNTIL FALSE
```

Program VI

Star Maze II (Kay Dee Software)

They have maze to take you a walk...

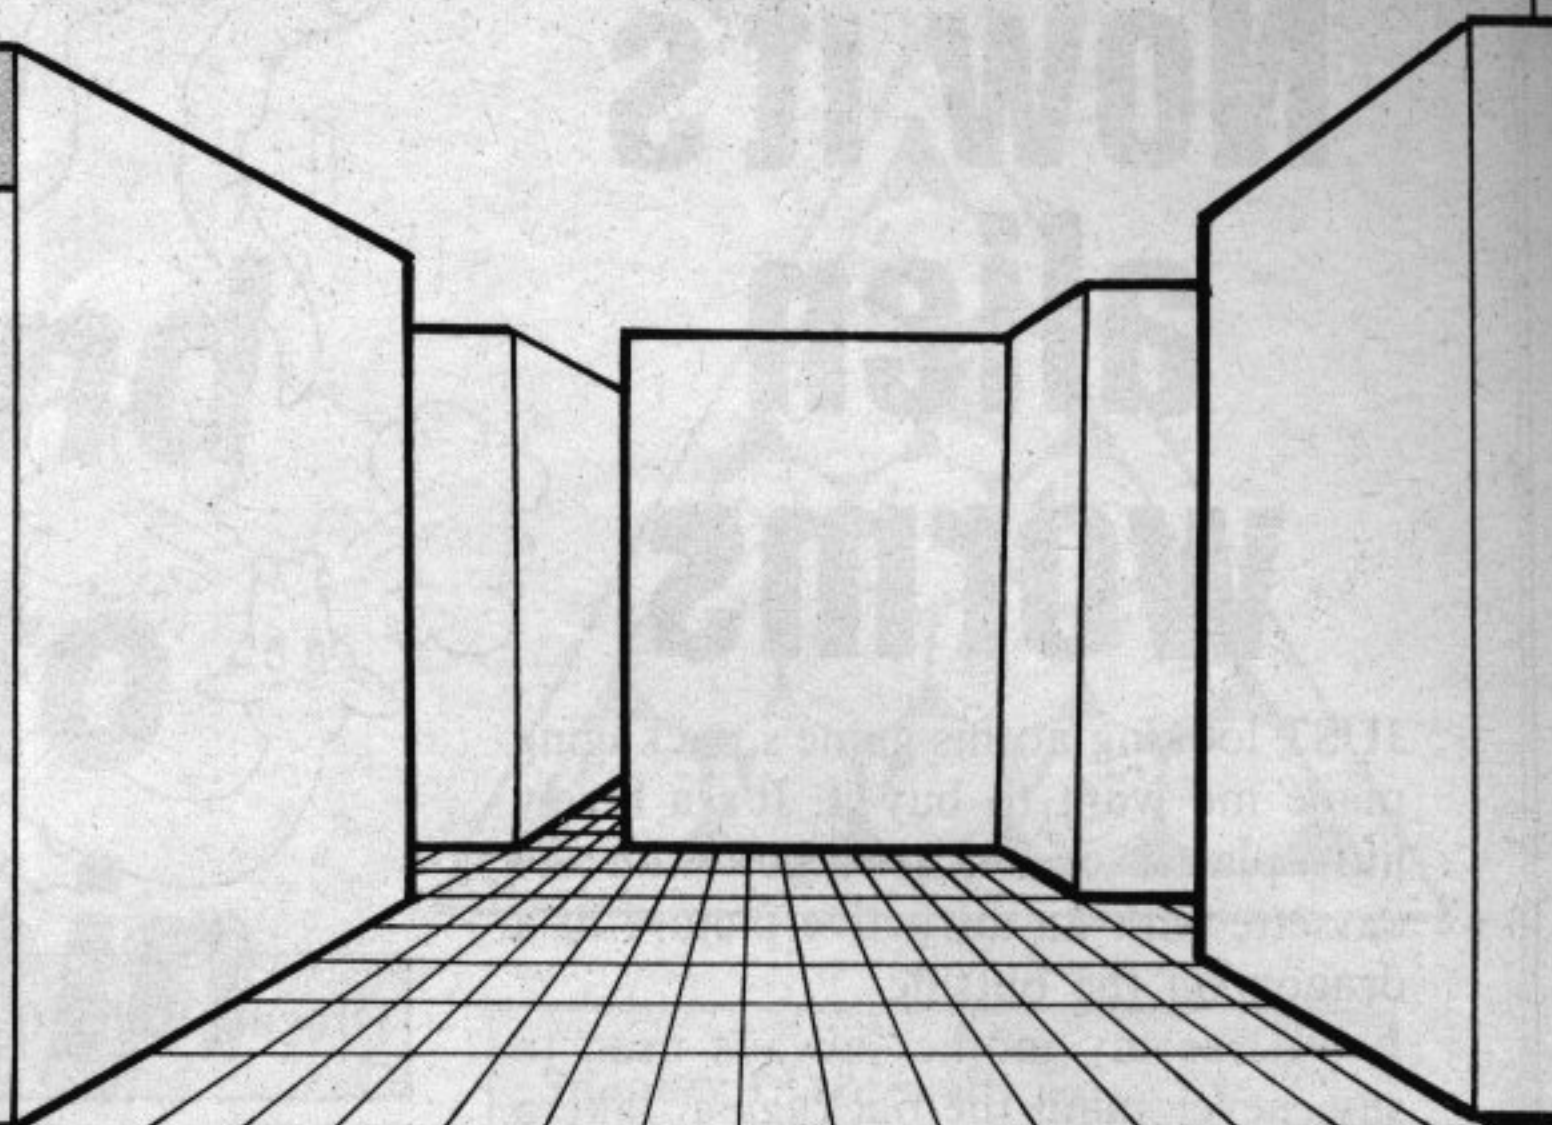

ONE of the things that amazes me about our galaxy is the amount of dishonesty there is about. I mean, someone actually stole the tungstidium jewels from the Emperor of Zxylon.

Anyway he was caught and got what he deserved. He's been put in a 3D maze which has been constructed on a space platform.

By the time he gets out of there he'll have learnt the error of his ways.

Still it's an ill wind that blows no good. The whole episode has given Kay Dee Software the idea for a clever new adventure game called Star Maze II.

The idea is that you are put in the maze and have to find your way out. The screen shows you the view forward and you can use the cursor keys to move forwards, back, left, or right.

Also you have a display telling you which way you are currently facing, the

co-ordinates of your position, and, ominously, the amount of energy that you have left.

It's utterly fascinating, and it's all too easy to monopolise the micro while you try to crack the problem. Irritatingly it's one of those games where onlookers feel obliged to give advice.

My advice to them is to go away and buy their own copy of Star Maze II. They won't regret it. **Jean Clarke**

Wordhang (Bourne Educational Software)

THIS version of the well-known Hangman word guessing game is a colourful and fun way of testing and expanding vocabulary and spelling.

It is particularly useful for a teaching environment because it allows a wide degree of supervisory control by the teacher or parent.

Specific lists of words can be used, words can be entered one by one, a group of words suitable for a particular topic or age group can be selected, time limits for guessing a letter may be set, and the progress of children using the program monitored.

The program is both easy and eye-catching to use. First of all the child is asked to enter his name, and then for each word to be guessed he is prompted to suggest possible letters to make up the word which the BBC Micro is thinking of.

Each correctly suggested letter is shown in its position in the word, but if an incorrect letter is entered or if no entry is made within the time limit allowed then part of the "hang-man" appears on the screen.

Spelling in suspended animation


If the word is not guessed before he is complete then the body swings up and down, his face turns gruesomely purple and the word is displayed in full.

The lists of words given on the tape include six different topic groups, each divided into six average reading age groups from seven to 12 years. The topics include history, geography, maths, transport and sport.

In addition to these, the utility Wordstore allows you to edit and store new lists of words to fit particular learning requirements. These lists are easily accessed by the main menu driven program.

This is a useful and effective implementation of a traditional learning game which can be adapted for a wide range of learning ages and abilities.

Jane Jackson

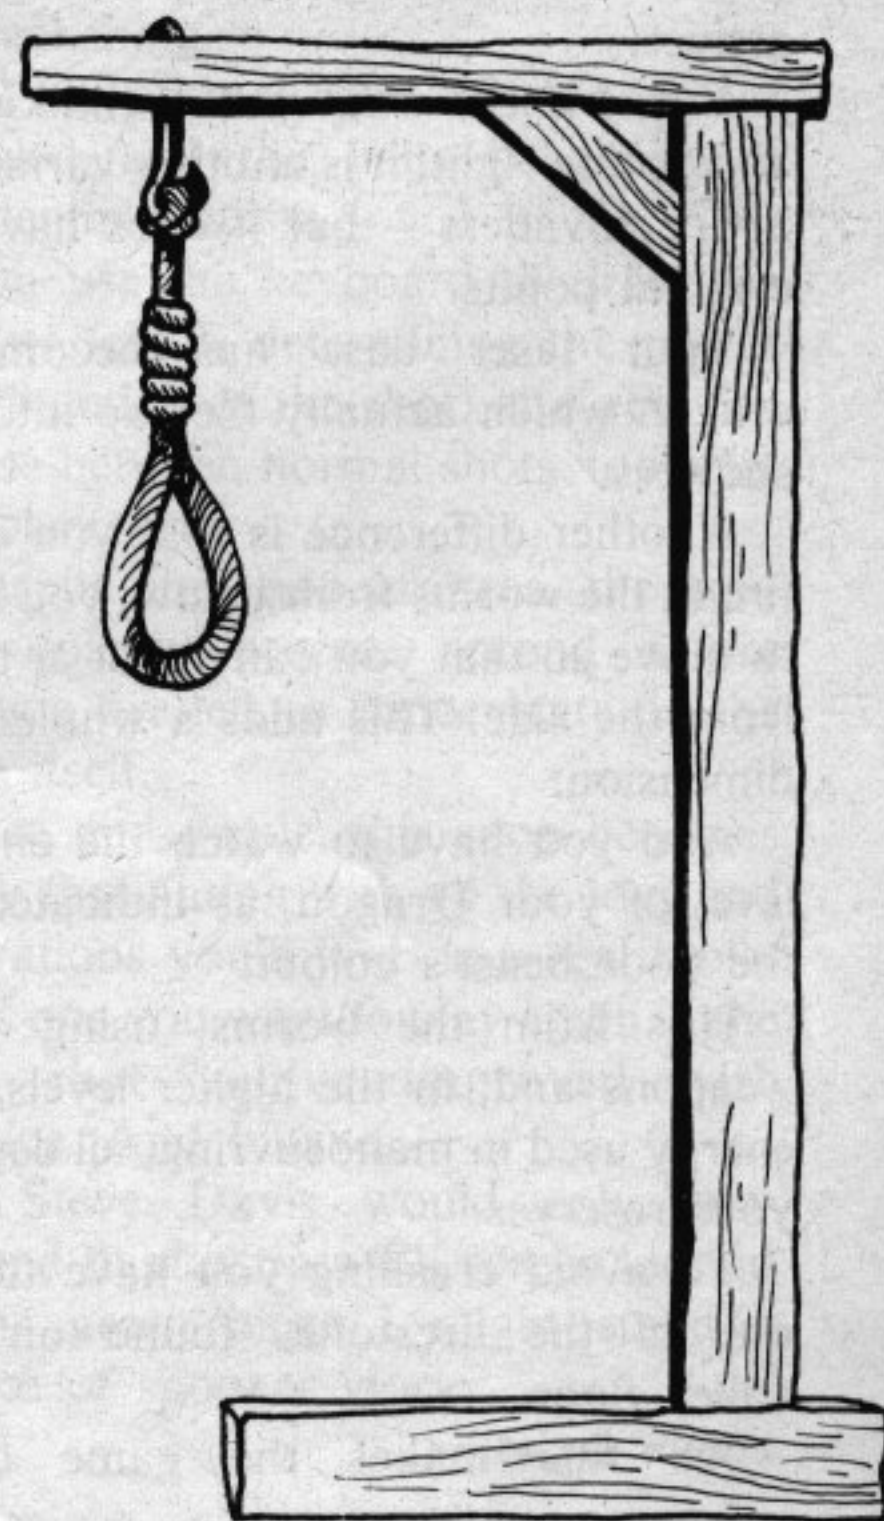

Now it's alien worms

JUST looking at this game's packaging made me want to buy it. It's a lovely little plastic case just larger than the cassette with an attractive picture of a dragon on the outside.

But, as my mother always used to say, never mind the packaging, take a look what's inside.

Well I have, and it lives up to expectations.

The theme of Dragon Rider is that you're on a planet threatened by showers of alien worms falling from the sky. If you've read any of Anne McCaffrey's excellent science fiction books you'll know where the idea came from.

Your aim is to destroy the worms before they reach the ground, and to this end you use your trusty dragon.

As you might expect you can scorch the worms with the dragon's breath, but this uses up rather a lot of energy. Alternatively you can use your laser lance which has less effect but saves energy.

When you destroy one cluster of the falling pests another, more testing one arrives.

Yes, I know what you're thinking – and you're right, it is another variant of Space Invaders – but it does have its original points.

Your laser base has become a dragon which actually flies up into the showers.


Another difference is that you can't fire at the worms from below, you have to move so that you can shoot at them from the side. This adds a whole new dimension.

And you have to watch the energy level of your Dragon, as indicated by the poor beast's colour.

Hits from the worms, using your weapons and, in the higher levels, the energy used in manoeuvring, all deplete your reserves.

To avoid crashing you have to eat one of the firestones found on the valley floor.

All this makes the game quite

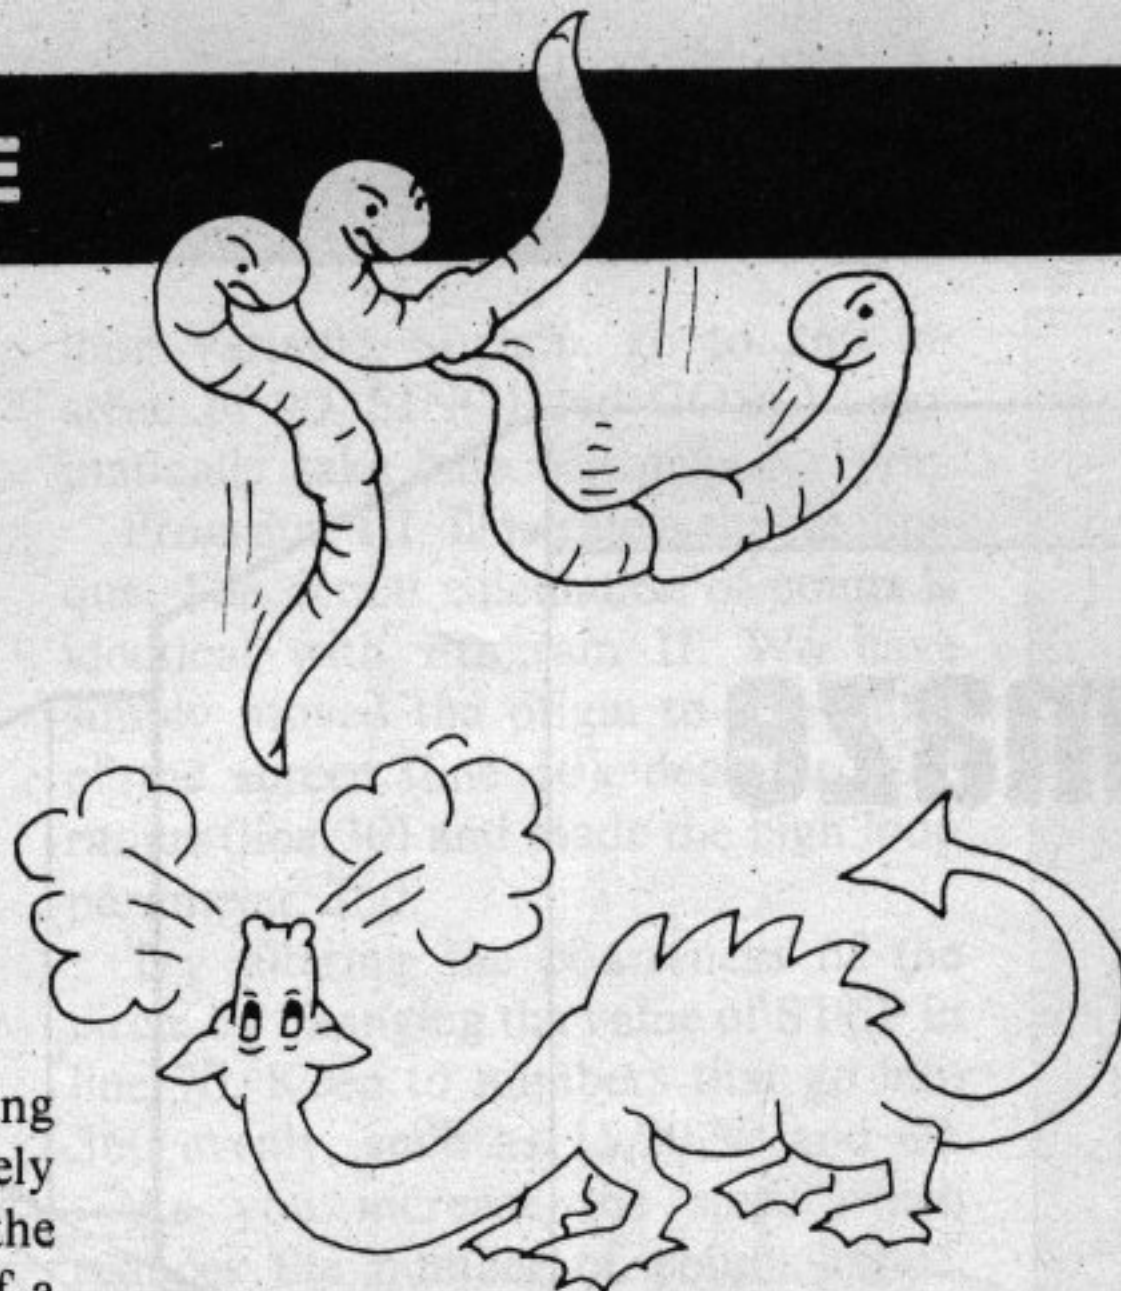

Dragon Rider (Salamander)

different, and its adequate instructions and easily-used keyboard controls make it simple to learn.

The graphics are high quality and the whole idea works well. Don't be fooled by the seeming lack of speed at first. You'll soon find it goes fast enough!

If you're looking for a zap-pow game that has all the attractions of Space Invaders plus a lot more then Dragon Rider deserves serious consideration.

It's different and it's fun.

Junior Maths Pack (Program Power)

HERE is a set of three good programs for helping with basic maths skills.

The first, Lander, is a fast-reflex test of skills at multiplication and division. You choose which you want to try and then must keep furiously typing in the correct answers to the problems which flash up on the screen.

Success determines whether or not the alien lander will make it to the Earth.

Every calculation you get right gives it a boost away from landing, but if you don't answer fast enough or you get the answer wrong then the lander gets nearer and nearer, eventually reaching the ground.

You can choose how hard to make this game by selecting tables, 2, 5 and 10, up to 5, up to 10 or up to 12.

Also you can select the speed of the attack, from 1 (this is impossible) to 5 (this is still pretty tough for those of us who use calculators usually for adding 2+2).

The second program, Treasure

Canyon (BBC Soft)

DURING the war the Mediterranean island of Malta found itself under attack from wave after wave of German planes.

In those troubled times all the island had in the way of air defence were three ancient Gloster Gladiators. They became known as Faith, Hope and Charity for reasons you might guess.

Now you can relive the situation in BBC Soft's excellent new game Canyon.

As one of the defenders of the embattled state of Asdel you only have three biplanes to repel the unwarranted aggression of your warlike neighbour of Xar.

On their side they have fighter bombers, missile boats, mines and rather unpleasant giant flame throwers. In

The skill shapers

Search, tests coordinates and direction.

You have to try to find an object hidden in a grid of boxes by a wizard. When you find one he hides another, until after four successes he gives up and goes off to haunt another computer.

To look in any box you give the X coordinate (1 to 10) and the Y coordinate (1 to 20). If there's nothing in that box, an arrow points towards a box with something in it.

You can choose to either have the arrows remain on the screen or not.

Every time you find an object, which might be an emerald if you're lucky or just an old bone, you're told how many

When a good idea produces fine software

THIS is a good computer adaptation of a learning game which can be fascinating to use both for young and old BBC Micro users.

First of all the user is asked to enter their name, and then to think of an object for the computer to guess.

When you have thought of your object the computer asks if it is animal, vegetable or mineral. Suppose you had thought of a cat, then the response here would be animal.

Being a fairly smart computer the next question you are asked is: "Has it got four legs?" In this case you would say yes, and the computer thinks for a moment and then asks: "Is it a cow?".

This is because until you have taught the computer a few more facts about the world, the only four legged animal it knows about is a cow. So it gives up guessing when you say "No", and asks you instead what animal you were thinking of.

Now for the tricky part! The computer rather sweetly asks "Now please type in a question that would tell the difference between the following: Cat - Cow".

Just when you are feeling that you

Animal/vegetable/mineral (Bourne Educational Software)

have outwitted the stupid machine you have to think of a good difference between the two objects.

For example, "Does it live outside?" and "Can you keep it as a pet?" could have debatable answers! In this case you could settle for: "Does it purr?"

The computer responds with "Thanks for teaching me more", and tells you how many animals, vegetables and minerals it knows of now.

If you have another go, and think of another animal the computer will ask first, "Has it got four legs?" then if you say yes will ask, "Does it purr?".

From here it again builds up a store of knowledge about objects and sig-

nificant differences between them, which after a few goes develops into an appealingly interesting exercise.

The computer gradually learns more and more about the objects and challenges you to increasingly more subtle depths of thinking about them.

The program allows you to save questions and objects too, so that all your hard thinking from one session can be used again without beginning from scratch.

This is one of those rare programs which takes a good simple idea and translates it into an equally good and easy to use piece of software.

Jane Jackson

Expertise isn't always enough..

I'VE come to realise that games seem to interest two types of people. The first, and more numerous, only want to play the game and enjoy it.

The second want to know how it works and, probably, how to copy it. (I hasten to add that they only want to make a back-up copy!)

I thought of this when I got Acornsoft's Starship Command to review. A friend of mine who is much more knowledgeable in the ways of the BBC Micro than I had told me of this "fantastic" new game from Acorn.

So it was with feelings of pleasant anticipation that I loaded it into my micro. Sadly, I was disappointed.

Not that it's a bad game. On the contrary it's a very good version of an

Starship Command (Acornsoft)

old favourite. You know the one - you're a starship captain cruising through deep space tangling with alien nasties.

Well-packaged, with excellent instructions - both on paper and in software - it's an example of what a game should be. But it's also a bit boring.

I got on to my friend and told him what I thought. I said the scenario was good, but wasn't it just Meteors with enemy ships instead of interstellar rocks?

He was appalled and told me I'd

missed the point. The game was brilliant.

Hadn't I noticed that my ship stayed still in the centre of the screen and when I turned it was the enemy ships that "moved" relative to me? How do Acorn do that? he asked.


Well I don't know and to be quite frank I don't care because I belong to the first group of games enthusiasts.

I just want an interesting, exciting game to play. And I'm afraid that despite the obvious expertise that went into it, Starship Command just does not fit the bill.

A lot of effort seems to have gone into producing a very ordinary game. Disappointing.


Nigel Peters

Make sure your Micro User collection is complete!

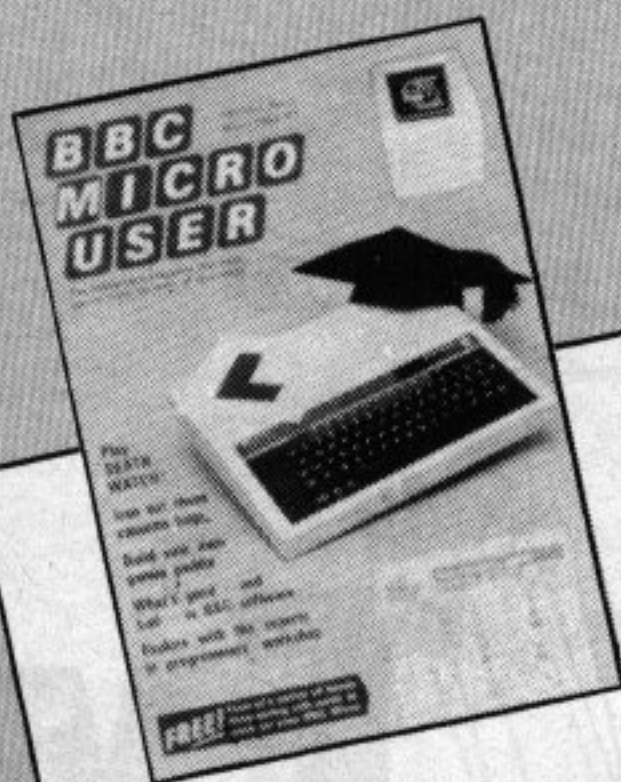

March issue

Beginners: guide to the key-board. Build your own processor review. Guide to text colours and graphics. BBC operating system, Part 1. How to avoid cassette loading problems. Deathwatch listing. Upgrade Model A to B at half the shop price. Shapes program. Bingo listing. Sorting routines. Test for function keys in machine code routines. Colour monitor review, Part 1.

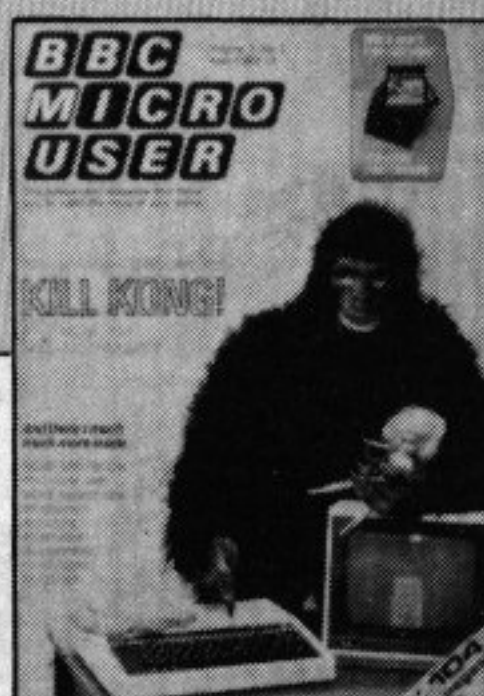

April issue

Beginners: simple programming techniques. Produce impressive graphics with Teletext Mode 7. Common copying errors revealed. How to draw multi-coloured lines. King Kong listing. BBC Operating System, Part 2. Colour monitor review, Part 2. Upgrade Model A to B, Part 2. Finding the ROM's action addresses. Binary code and how to use it. Disc formatter listing. Plus 8-page pullout: essential reference guide for Basic programmers.




May issue

Beginners: string variables. Pelmanism listing. Mode 7 animation, Part 2. Interfacing in the laboratory. How to generate vertical or even inverse text. Graphics course: triangles and rectangles. Build yourself a joystick. The Osbyte routine: full investigation. Air Strike listing. Anagrams listing. Structured programming, Part 1. How to make full use of the BBC's editing function. Medprom eprom programmer review.


Back numbers are still available at £1.25 (incl. p&p)

**ORDER FORM
ON PAGE 93**

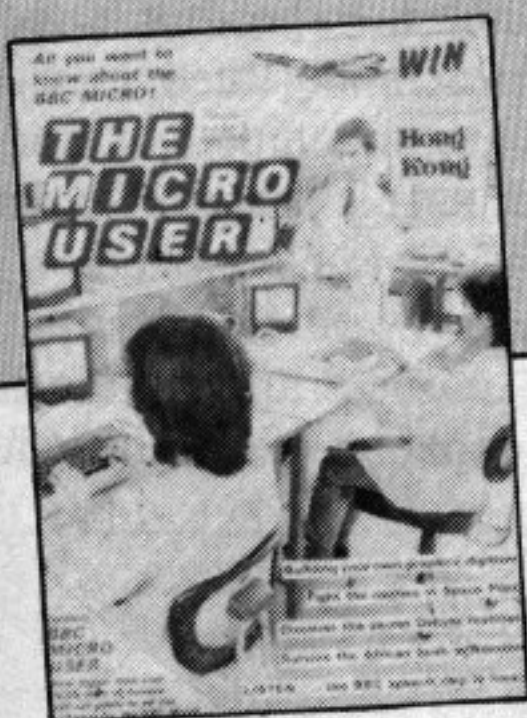


June issue

Beginners: Use of the INPUT statement. Editing course: LIST and LISTO. BBC speech chip review. Structured programming, Part 2. Solving cassette problems. Build your own graphics digitiser. Hidden *FX calls. Guide to indirection operators. Single key memory display program. Space Pilot listings. Graphics course: text and graphics windows. Nomsim listing. Bringing user defined characters to life. Guide to Software for the BBC Micro.

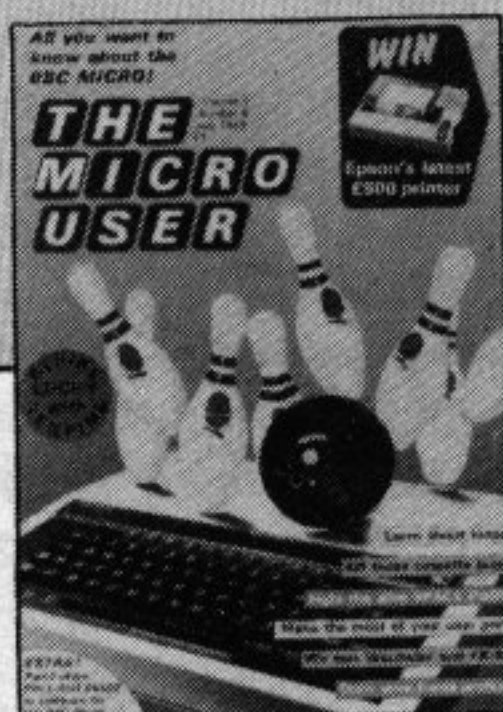


July issue

Beginners: loops. Ten Pins listing. Editing course: the PRINT statement. Graphics course: creating sunburst effects. Structured programming, Part 3. How to use the user port to maximum effect. Space Pods listing. Wordwise review. Epson FX80 printer review. The BBC Micro as a sophisticated design tool. Hexadecimal highlights. How to edit with impunity, and fix that break key. Guide to Software for the BBC Micro.

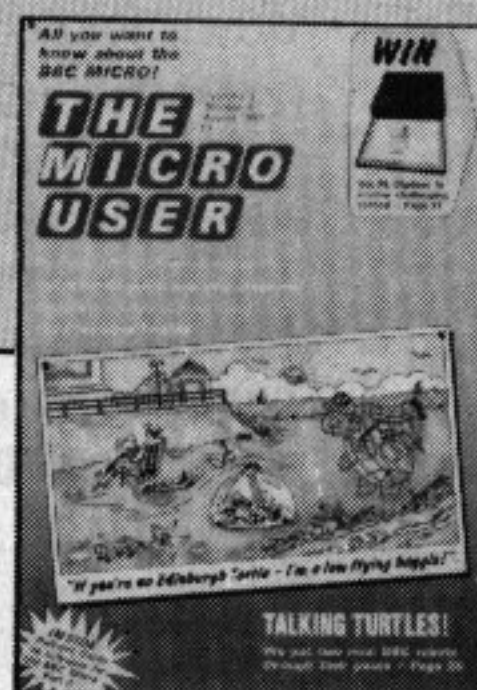

August issue

Beginners: more help on loops. BBC Micro User's Manchester show reviewed. Animation, Part 1. BBC Buggy and Edinburgh Turtle reviewed. Easy techniques for switching from tape to disc. Structured programming, Part 4. Inside King Kong: case study of the popular game. Fruitsies listing. A guide to logical operators. Machine code routines to give Mode 7 colour. Build your own dual cassette system. Guide to Software for the BBC Micro.

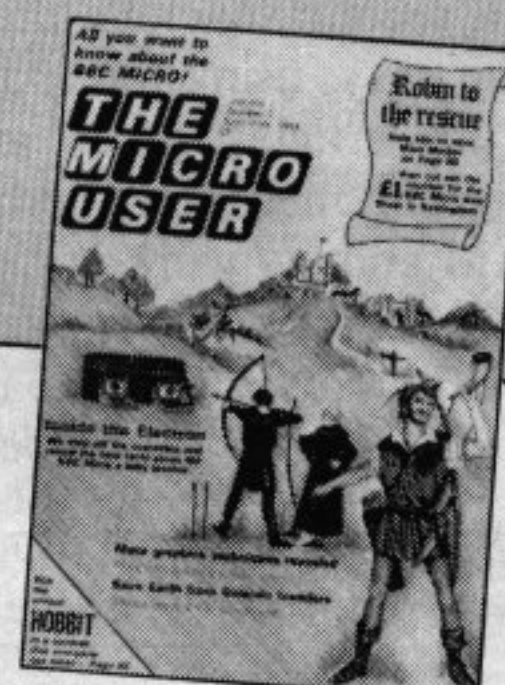

September issue


Animation Part II. Editing course: use of the TAB statement. Turn your BBC Micro into a graphics terminal. Galactic Invaders listing. Structured programming, Part V. Two new DFS and APTL Eprom blower reviewed. Control the outside world safely with your BBC Micro. Robin and Marian listing. Workshop: variable storage explained. Beebcalc investigated. Inside the Electron. Guide to Software for the BBC Micro.

IN this article PAUL BEVERLEY shows how two BBC Micros can be linked interactively, offering tremendous possibilities to the programmer — not least in the field of games software.

For example, you could “fly” a Sopwith Camel on your micro while your opponent uses his machine to attack you with his Fokker Triplane.

If YOU want to become involved in this new style of programming drop us a line describing the form your program will take. The address is: Link Up, The Micro User, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

PAUL BEVERLEY a couple of BBC interesting

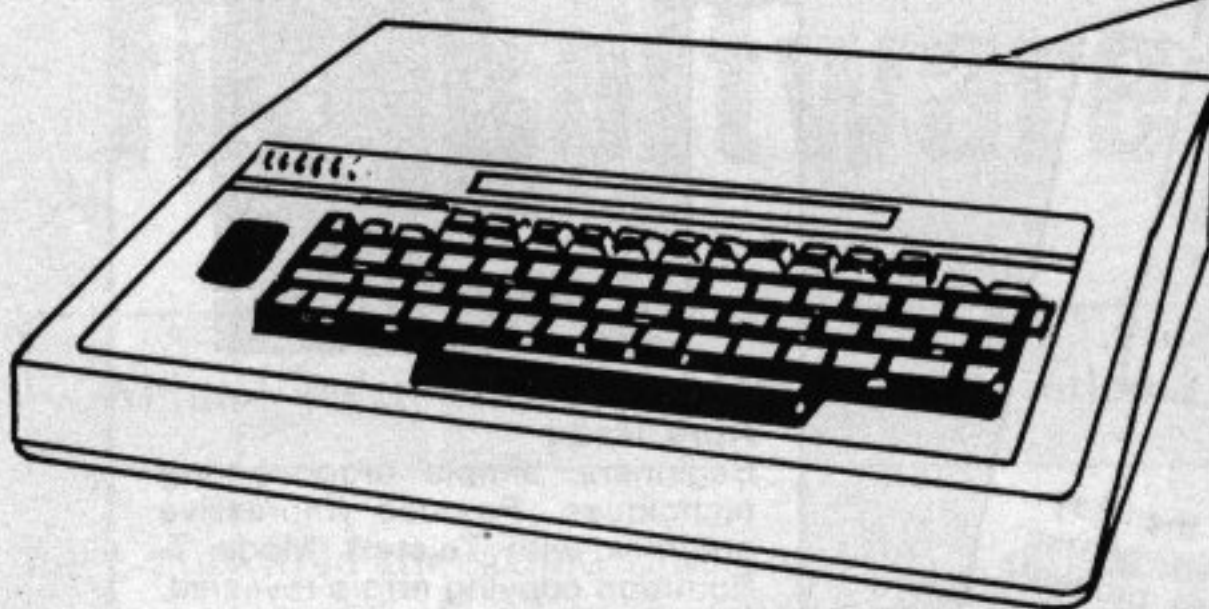

Two have a

HAVING looked last month at the way in which the BBC Micro could be linked to a mainframe computer by using the RS423 Serial Port, we now look at the idea of linking two BBC Micros by using the same RS423 port.

In linking up to a mainframe computer the idea was to make use of the processing power of the mainframe and the colour graphics facility of the BBC Micro.

What, then, is the point of linking two BBC Micros? First of all, it is possible to do the same sort of thing as we were doing with the mainframe.

The idea is that the second BBC does the calculations, while the first one concentrates on drawing the graphics. The machine doing the calculations can then work in mode 7 and therefore have its full memory capacity for the program and data storage.

However, the same effect could be achieved much more easily, cheaply and efficiently by using a single BBC Micro linked to a second processor.

Nevertheless, if you do have access to a second machine then it would be quite easy, using the routines provided in this article, to run an applications program needing, perhaps, 28k of RAM and yet work in modes 0, 1 or 2.

A second possible use of a BBC-to-BBC link is for down-loading software. If you have a number of cassette

machines and a single disc machine, then for the cost of a couple of five pin DIN plugs and a few metres of four-core screened cable, you have the facility for sending programs at fairly high speed down from the disc system to the cassette systems.

For example, a 15k program can be down-loaded in approximately 25 seconds. Figure I shows the way in which the cable should be made up using the RS423 DIN connectors.

The easiest way to achieve this is to have a key on the receiving micro-computer programmed as:

***KEY0NEW!M*F2,1!M**

and one on the sending microcomputer programmed as:

***KEY9*FX3,7!MLIST!M*FX3,0!M.**

It would be possible to increase the baud rate of the two RS423 interfaces to 19200 baud instead of the default value of 9600, but it makes very little difference since the speed is limited by the rate at which the Basic interpreter on the receiving machine can store the program. On a 15k program it made a difference of only one second.

The problem with this is that it is only a one-to-one transfer. Ideally, it should be capable of a “broadcast”



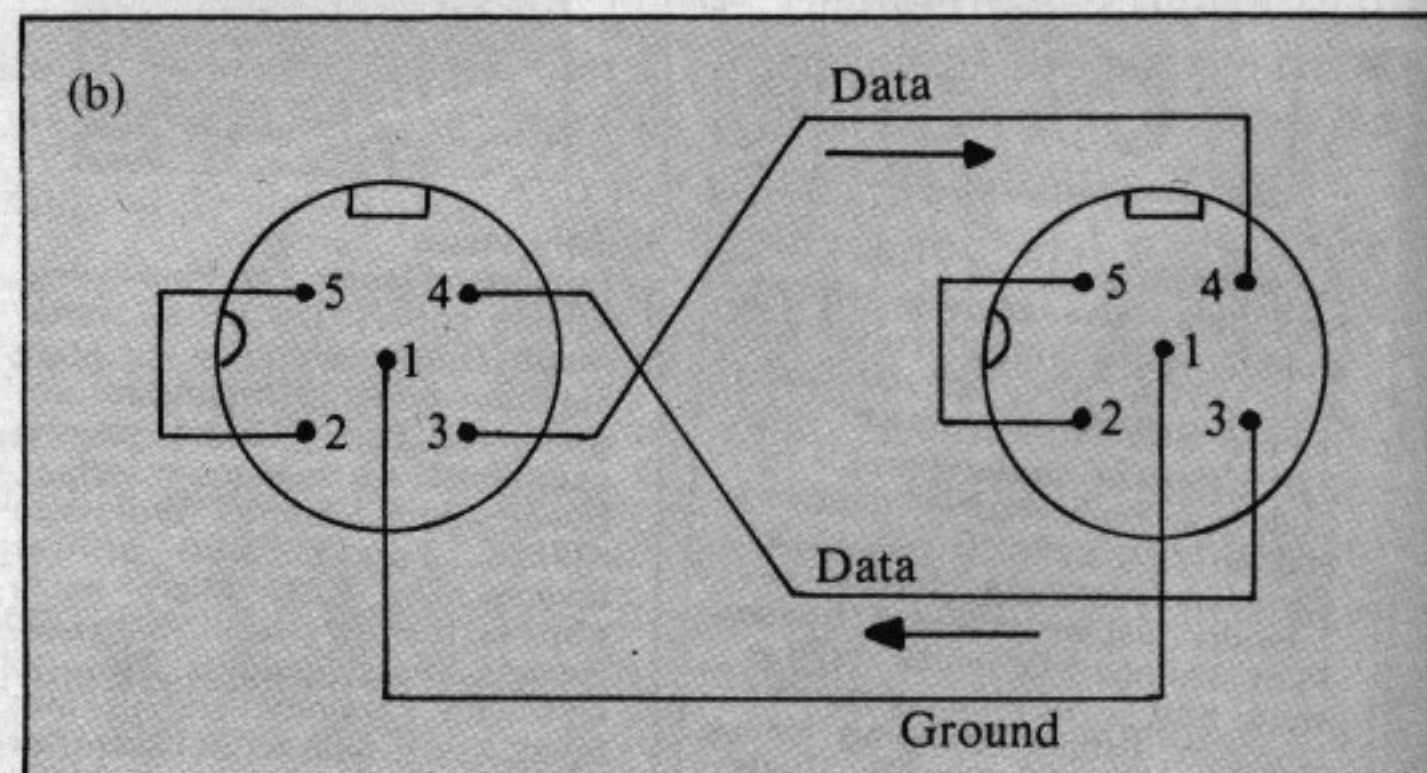


Figure I: How to connect up the two RS423 connectors

(a) Including the handshake lines for full speed communication (b) Without the handshake lines

shows how to link Micros to write interactive games

can party...

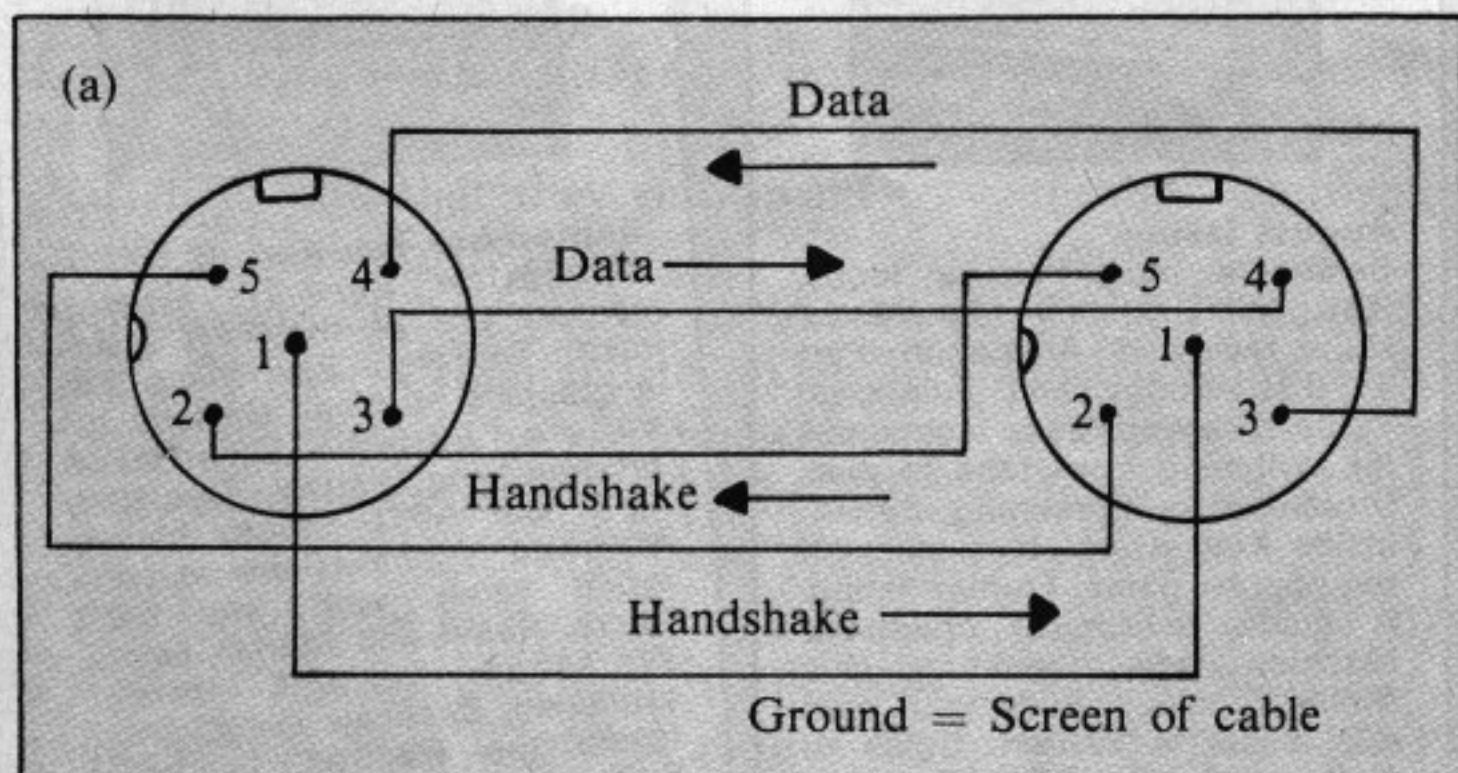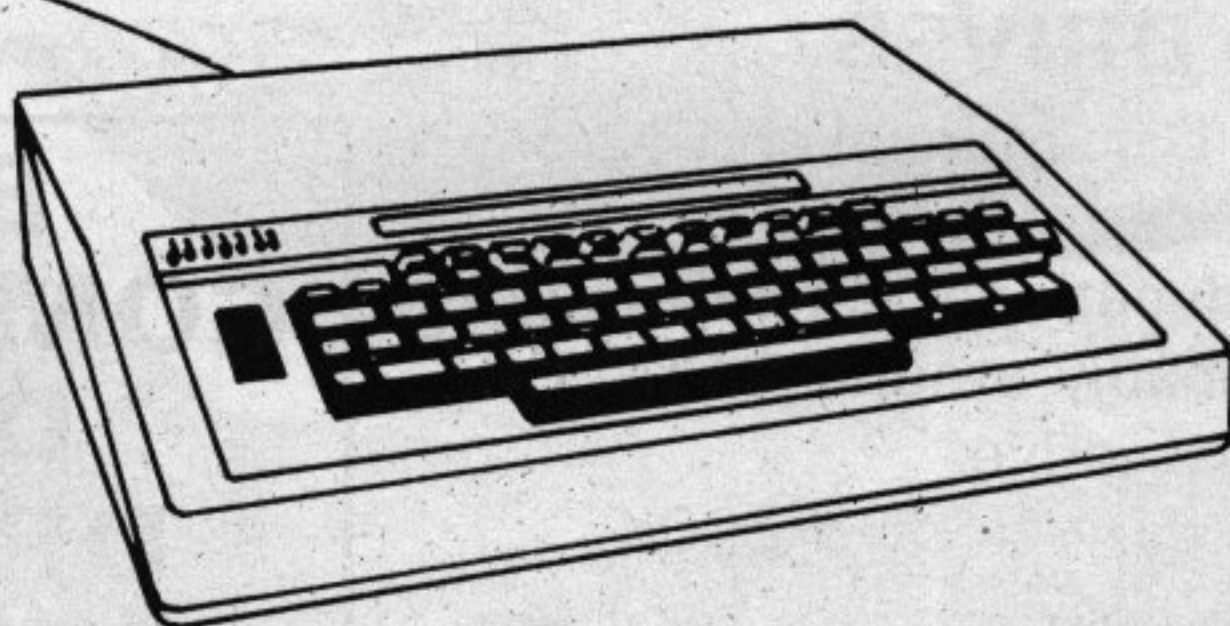

system so that several micros could receive programs from the one disc-based computer at the same time.

The problems with this are, first of all, that one RS423 driver might not be capable of driving a number of RS423 receivers, and secondly that hand-shaking would be difficult to achieve because a number of devices would be trying to control the output of one machine.

It would probably be best to do away with hand-shaking altogether and work at a lower baud rate. At each station then, the RTS and CTS should be linked together as a way of ensuring that it is always "clear to send". (See Figure 1b.)

As far as the baud rate setting is concerned, this is done by using *FX7 for the receive rate and *FX8 for the sending rate, as explained on page 424 of the User Guide.

These rates, once set, are only changed back to the default values by a hard break and not by a soft break, so there is no need to program a key to give the correct receiving speed.

This is all very interesting and exciting for the educational user. But what is probably more interesting to a larger number of people is the idea that since,

when two computers are linked via the RS423, each has the capability of drawing or writing on the other's screen, you could play interactive games with two computers.

You can either have the two computers playing one another or two operators at the two computers playing a game against each other.

An obvious example would be the well known game of Battleships. The two players would sit with their computers back to back so that neither could see the VDU of the other. The moves could be made on each computer and the bombs could be dropped by sending them down the RS423 (not literally!).

In this present article, all I shall do is to give a series of procedures which you could incorporate into your own games programs. I am sure that if some of you write some good programs the editor will be pleased to publish the best of them.

Before explaining in detail the procedures for linking the two micros let us look at the way in which the RS423 actually works so that you may understand better how the communication takes place.

As I explained last month, the BBC

Micro has three separate buffers which are used for storing characters as they enter and leave the computer. There is one on each of the RS423 input and output, and also one on the keyboard.

If someone presses a key, this interrupts the processor, which responds by scanning the keyboard to find out which key has been pressed. It then puts the Ascii code of the character into the keyboard buffer.

When characters are received on the RS423 input, again the processor is interrupted and the characters are placed in the RS423 input buffer.

When the processor wants to send some characters out onto the RS423, they are simply placed in the RS423 output buffer so that as soon as the ACIA (Asynchronous Communications Interface Adaptor) has sent out one character, it interrupts the processor which responds by looking in the RS423 output buffer for a further character to send out.

Software control of the RS423 input and output is achieved by using FX calls 2 and 3. The first deals with input, the second with output.

As far as the input is concerned there are only three values which are used.

***FX2,0** – This completely disables the RS423 input (and NOT enables it, as the User Guide says), and allows input to come only from the keyboard. In other words, if the ACIA receives any incoming characters it does NOT interrupt the processor and the characters are NOT stored in the RS423 input buffer.

***FX2,1** – This causes input to be taken only from the RS423 input buffer so that any command like INPUT, GET, GET\$, INKEY or INKEY\$ only looks at the RS423 buffer for its input. At the same time if keys are pressed, the characters produced are placed in the keyboard buffer, although they are not accepted by any of the input commands.

***FX2,2** – This works in exactly the opposite way to 2,1 in that characters are taken in only from the keyboard buffer, but if any characters arrive on the RS423 input they are placed into the RS423 input buffer and can be looked at later when a *FX2,1 is executed.

As I explained last month, any of the graphics commands such as PLOT, DRAW, GCOL, COLOUR, etc can be

BBC MICRO IN MANCHESTER

All prices include VAT unless otherwise stated

BBC Model B Computer	£399
BBC Model B with Disc Interface	£469
BBC Model B with Disc Interface and VIEW	£528.90
BBC Model A Computer	£299
A to B Upgrade (including fitting)	£69
Disc Upgrade (including fitting)	£95
VIEW Word Processor	£59.90

**BBC
COMPUTER
HARDWARE**
always in stock

TEAC SLIMLINE DISC DRIVES

Including Cables, Formatting Disc, Disc Manual and 12 months guarantee. We have provided over 100 of this type of drive to personal users, educational establishments and companies, and there are probably around 1,000 BBC users of this extremely reliable disc drive.

It can also be twinned at a later date to give 200K.

100K — **£205** inc. VAT 400K — **£345** inc. VAT

Twin 100K's to give 200K **£389** inc. VAT

**BBC
COMPUTER
DISC
DRIVES**
always in stock

★ ★ MASSIVE RANGE OF GAMES ALWAYS IN STOCK ★ ★

16K RAM CARD

If you're running out of RAM our new 16K CARD gives you a total of 48K. Compatible with cassette or disc filing system.

Supplied with demo software.

£79.95

AP100A Acorn Printer

- Centronics interface
- Several character sets
- Screen Dumps (free screen dump prog.)
- Double size
- Our best-selling printer

£219 inc. VAT

STAR DP510

- Centronics interface
- Top quality Dot Matrix
- Many character sets
- Screen Dumps
- Italics/Double Size
- Form and tractor feed
- True descenders

£289 inc. VAT

CHIPCHAT

Speech synthesizer for your BBC. This is a completely Acorn hardware and software compatible speech synthesizer which simply plugs inside your micro.

Although the Acorn synthesizer does not have as many words or phrases, Chipchat is a much more affordable system.

Price — ONLY £39.95 inc. VAT

Ring for a demonstration

Available now.

Supplied with demo software

NOW AVAILABLE

AMS 3" DISC DRIVES

£189

Come and see them at
the First Stockist in
Manchester.

DISC UPGRADE

100K Teac

Drive £205


Disc Interface £95

~~£300~~

OUR PRICE £299

inc. VAT

C ★ TECH COMPUTERS

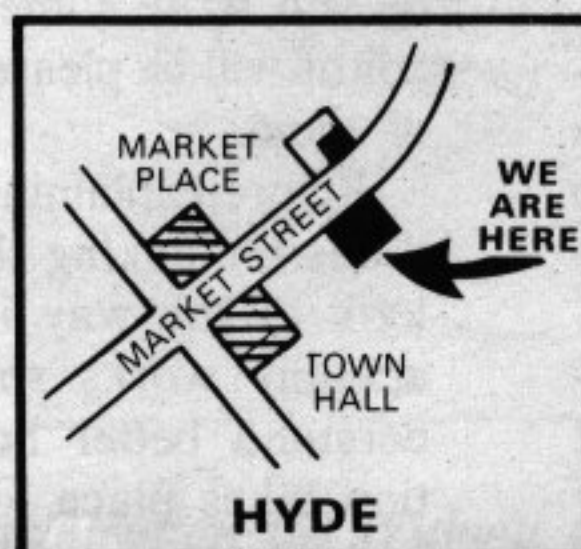

**184 Market Street,
Hyde,
Cheshire SK14 1EX.**
Tel: 061-366 8223



EDUCATIONAL & BULK
DISCOUNTS AVAILABLE

PROFESSIONAL SYSTEM

100K Teac Drive £205

Acorn AP100A £219

~~£424~~

OUR PRICE £419 inc. VAT

AMS announce the 3" disk drive

DEALER
ENQUIRIES



* Format and verify utilities
on disk or EPROM

* Interface cables

* Manual

* Free disks

NB When used with some computers, both
drives and disks have a double density
capability. Educational and Institutional
orders welcomed.

* Single 100k—£225

* Double 200k—£399


includes VAT and delivery to your door

The neatest and best disk option ever

We've taken the brilliantly engineered and proven Hitachi 3" drive and housed it in rigid steel, textured and coloured to match your BBC Micro. And we've added cables, manuals, utilities on disk and EPROM, and free disks.



Japan, home of the major disk drive manufacturers, has decided to make the new 3" disks a standard. And no wonder. Not only are they strong and easily stored, they give 100K per side, and you simply flip them over in the same way as a music cassette. The small light on the casing reminds you which side you are using. The disk is totally encased in rigid plastic, with no exposed surfaces, is easily inserted with one hand and simply removed by pressing the eject button. A unique feature of the new disks is a mechanical tab which prevents overwriting of precious data. And of course, you can switch it back when necessary.

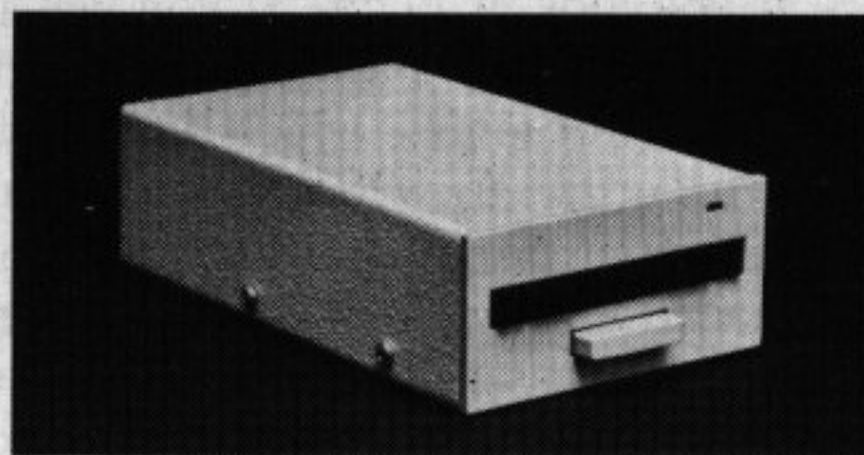

Reliable and Robust

The Hitachi drive boasts a brushless direct drive motor, the best possible system for trouble-free use. AMS-3 units simply run off the BBC power supply—they don't need their own supply and there's no need to worry about corrupt data.

The standard interface lets you use the disk drive with most other computers and in tandem with 5¼" drives.

High Speed Access

The disk drive provides a track-to-track access time of only 3mS, much faster than old-fashioned drives.

Reliable delivery

Fill in the coupon below and we will send it to you with our full no-quibble money-back guarantee. Advanced Memory Systems Ltd, Woodside Technology Centre, Green Lane, Appleton, Warrington, Cheshire WA4 5NG.

*Disk drives supplied by Hitachi Europe Ltd.

RING (0925) 62907. 24-HOURS.

TO: Advanced Memory Systems, Ltd, Woodside Technology Centre, Green Lane, Appleton, Warrington, Cheshire WA4 5NG.

Please send me by door-to-door courier:

_____ (qty) AMS-3 (S) single disk drive at £225 each with free disk.

_____ (qty) AMS-3 (T) twin disk drives at £399 each with two free disks.

(Prices include EPROM, utility disk, cables, manual, VAT and delivery).

Please send me by post, if not with drives:

_____ (qty) double sided (100K x 2) disks at £4.95 each.

_____ (qty) packs of five at £22.50 per pack.

_____ (qty) utility EPROM at £15.

I enclose a cheque for £_____

or debit my credit card

No _____

Name _____

Address _____

Post Code _____

Tel No _____

Signature _____

Please allow up to 28 days for delivery.

BBC 8

From Page 55

interpreted as a sequence of numbers which are simply sent to the operating system software. These strings of characters could come directly from the keyboard or from a program, or they could come from the RS423 input.

The only problem is that if you do not complete a sequence of characters for a particular command, and then receive some characters from a different source, then the two sets of commands, having been mixed up, will produce all sorts of spurious effects.

Therefore, it is important in any software using the RS423 input for graphics that you should be careful to complete each command before switching from the RS423 back to the keyboard.

That is probably why Acorn have not made it possible with the current FX commands to enable both of the RS423 and keyboard inputs at the same time. If this were done then commands from the keyboard and from the RS423 would be interleaved, causing complete chaos.

*FX3 is used to select which of the three possible output channels are used when the processor wants to send out characters. The three channels are:

1. The printer
2. The VDU
3. The RS423 output

In the *FX3 command, the number which is used is made up of three binary bits, each one representing one of the three output channels, and whether that channel is selected or not depends on the state of the binary bit, either one or zero.

It is further complicated by the fact that the RS423 channel uses logic 1 to indicate that it is on, whereas the other two use logic 0 to indicate that they are on. Therefore the best thing to do is simply to look at the table on page 422 of the manual to decide which number to use for any particular combination of outputs.

Unfortunately, there is a further complication. Certain of these commands do not seem to work properly in the 1.2 operating system. Acorn tell us that *FX3,2 does not work properly, and Beebug assure us that it is *FX3,3 which does not work properly. Various other sources indicate that the fourth bit of the binary number, not mentioned in the User Guide, can also be used in order to control what happens, although again no one is

really sure quite what it does.

As far as this present task of communicating via the RS423 with another BBC is concerned the problem is very simple. All you need to use is *FX3,0 if you simply want to output characters to the screen, *FX3,7 if you want to output characters to the RS423 and not to the screen, and finally, if you want to send them out to both, use *FX3,1.

If someone has the time to sort through which of these various *FX3 commands does what, I – and probably various others – would be extremely pleased. But, as far as I can see, the only problem that occurs is when you try to get the printer enabled and not the VDU. This would account for the problems occurring with both *FX3,2 and 3,3.

It seems that the printer driver routines operate THROUGH the VDU routines and therefore if you disable the VDU routines you disable the printer driver, but don't quote me on that. I may be wrong.

If you want printer only and not the VDU then try:

**VDU 2,21 :REM switch printer ON,
screen OFF:PRINT whatever
VDU 3,6. :REM switch printer OFF,
screen ON.**

If you look at Figure II you will see a sample program containing the various procedures which you could use in order to write various communications programs. If this program is loaded into two separate computers linked by an appropriate cable, then each computer will draw a pattern on the other computer's screen.

If you want a more impressive demonstration, then while this program is running on one computer, run the program given in Figure III on the other. While the first computer draws the pattern on the other's screen, anything typed into the keyboard of the second computer comes out on the screen of the first computer!

Not all of the procedures in this program are actually being used but have been included so that you can see what is possible. Let us look, therefore, at the procedures given in Figure II in the order in which they occur in the list of DEFPROC's.

The first job which has to be done is to enable the RS423 input buffer using *FX2,2. You then need to disable the escape codes by using *FX229,1.

The reason for this is that otherwise,

```

0 PROCinitialise
10 MODE 1
20 REPEAT
30 PROCreceive
35 CZ=INKEY (0)
36 *FX3,7
37 IF CZ>0 VDU 1,CZ
38 *FX3,0
40 UNTIL 0
50

20000 DEF PROCinitialise
20010 *FX2,2
20020 *FX229,1
20025 *FX7,8
20026 *FX8,8
20030 ENDPROC
20040
20050 DEF PROCreceive
20060 *FX2,1
20070 NZ=INKEY (0)
20080 IF NZ=-1 GOTO 20120
20090 FOR CHARS=1 TO NZ
20100 PRINT GET# :
20110 NEXT
20120 *FX2,2
20130 ENDPROC
20140

```

Figure III: A program to allow text and graphics to be sent in from the other computer while sending out any characters typed into the keyboard back to the first computer.

any command which contains the number 27 (escape code) will not be executed properly since the 27 is taken as an actual escape, and the character will not be stored in the RS423 buffer.

This does mean that having done a *FX229,1 you cannot escape from any programs by pressing the escape key, but you can always press BREAK and perhaps have the BREAK key programmed with an OLD command.

Each of the commands which is sent out using one of the procedures from line 20170 onwards is preceded by a number which indicates how many characters there are in the particular command.

The idea is that when receiving characters you want first of all to look and see whether any characters have arrived at all (this is done at line 20090 using the INKEY command). If so you then want to wait until all of the characters which make up the complete command have arrived.

If you do not do this, then the receiv-

0 PROCinitialise	20340 *FX3,7	20980 DEF PROCright
10 MODE 1	20350 VDU (3+LEN (P\$))	20990 *FX3,7
20 PROCvdu(5)	20360 PRINT TAB(X%,Y%)P\$;	21000 VDU 1,9
30 PROCgraphics_origin(640,512)	20370 *FX3,0	21010 *FX3,0
40 REPEAT	20380 ENDPROC	21020 ENDPROC
50 FOR S%=20 TO 500 STEP 40	20390	21030
60 PROCgcol(3,RND(3))	20400 DEF PROCcr1f	21040 DEF PROCtextwindow(X1%,Y1%,X2%
70 PROCcolchange(RND(3),RND(8)-1)	20410 *FX3,7	,Y2%)
80 FOR X%=-S% TO S% STEP 8	20420 VDU 2,10,13	21050 *FX3,7
90 PROCmove(-S%,X%)	20430 *FX3,0	21060 VDU 5,28,X1%,Y1%,X2%,Y2%
:PROCdraw(S%,-X%)	20440 ENDPROC	21070 *FX3,0
100 PROCmove(X%,-S%)	20450	21080 ENDPROC
:PROCdraw(-X%,S%)	20460 DEF PROCmode(X%)	21090
105 IF INKEY 0>0 REPEAT PROCreceive	20470 *FX3,7	21100 DEF PROCgraphicswindow(X1%,Y1%
:UNTIL INKEY 0>0	20480 VDU 2,22,X%	,X2%,Y2%)
110 NEXT X%	20490 *FX3,0	21110 *FX3,7
120 PROCreceive	20500 ENDPROC	21120 VDU 9,24,X1%;Y1%;X2%;Y2%;
130 IF INKEY 0>0 REPEAT PROCreceive	20510	21130 *FX3,0
:UNTIL INKEY 0>0	20520 DEF PROCplot(T%,X%,Y%)	21140 ENDPROC
140 NEXT S%	20530 *FX3,7	21150
150 UNTIL 0	20540 VDU 6	21160 DEF PROCbeep
160 END	20550 PLOT T%,X%,Y%	21170 *FX3,7
170	20560 *FX3,0	21180 VDU 1,7
20000 DEF PROCinitialise	20570 PROCreceive	21190 *FX3,0
20010 *FX2,2	20580 ENDPROC	21200 ENDPROC
20020 *FX229,1	20590	21210
20030 *FX7,8	20600 DEF PROCcolour(X%)	21220 DEF PROCcls
20040 *FX8,8	20610 *FX3,7	21230 *FX3,7
20050 ENDPROC	20620 VDU 2	21240 VDU 1
20060	20630 COLOUR X%	21250 CLS
20070 DEF PROCreceive	20640 *FX3,0	21260 *FX3,0
20080 *FX2,1	20650 ENDPROC	21270 ENDPROC
20090 N%=INKEY (0)	20660	21280
20100 IF N%=-1 GOTO 20140	20670 DEF PROCgcol(X%,Y%)	21290 DEF PROCclg
20110 FOR CHARS=1 TO N%	20680 *FX3,7	21300 *FX3,7
20120 PRINT GET\$;	20690 VDU 3	21310 VDU 1
20130 NEXT	20700 GCOL X%,Y%	21320 CLG
20140 *FX2,2	20710 *FX3,0	21330 *FX3,0
20150 ENDPROC	20720 ENDPROC	21340 ENDPROC
20160	20730	21350
20170 DEF PROCdraw(X%,Y%)	20740 DEF PROCcolchange(L%,A%)	21360 DEF PROCgraphics_origin(X%,Y%)
20180 *FX3,7	20750 *FX3,7	21370 *FX3,7
20190 VDU 6	20760 VDU 6,19,L%,A%,0,0,0	21380 VDU 5,29,X%;Y%;
20200 DRAW X%,Y%	20770 *FX3,0	21390 *FX3,0
20210 *FX3,0	20780 ENDPROC	21400 ENDPROC
20220 PROCreceive	20790	21410
20230 ENDPROC	20800 DEF PROCup	21420 DEF PROCdelete
20240	20810 *FX3,7	21430 *FX3,7
20250 DEF PROCmove(X%,Y%)	20820 VDU 1,11	21440 VDU 1,127
20260 *FX3,7	20830 *FX3,0	21450 *FX3,0
20270 VDU 6	20840 ENDPROC	21460 ENDPROC
20280 MOVE X%,Y%	20850	21470
20290 *FX3,0	20860 DEF PROCdown	21480 DEF PROChome
20300 PROCreceive	20870 *FX3,7	21490 *FX3,7
20310 ENDPROC	20880 VDU 1,10	21500 VDU 1,30
20320	20890 *FX3,0	21510 *FX3,0
20330 DEF PROCprint_tab(X%,Y%,P\$)	20900 ENDPROC	21520 ENDPROC
	20910	21530
	20920 DEF PROCleft	21540 DEF PROCvdu(N%)
	20930 *FX3,7	21550 *FX3,7
	20940 VDU 1,8	21560 VDU 1,N%
	20950 *FX3,0	21570 *FX3,0
	20960 ENDPROC	21580 ENDPROC

Figure II: A version of Persian written to run on the computer on the other end of the RS423 connector. Pressing any key will cause the generation of the pattern to halt at the end of a segment. Pressing again will restart it.

From Page 59

ing routine, when it is executed, will pick up only those characters which have already arrived in the RS423 input buffer.

If some of the characters for the current command have not yet arrived, then the procedure will end without having completed the command. Any characters subsequently sent to the VDU routines from the machine itself will be interpreted as the data for that particular command.

Therefore, the receive routine waits for all of the characters by using the GET\$ command. Having received all of the characters for the particular command, the input is then returned to the normal keyboard input by using the *FX2,2.

It is important to realise that if you do not have sufficient receive routines in your program then the output buffer in the sending micro will become full, thus effectively stalling the processor.

This means that it is not executing any receive routines either, and therefore the output buffer in the other machine will soon fill up.

This can be detected by the fact that both displays lock up and the shiftlock lights are on (both machines).

The remaining procedures are fairly self-explanatory, as the same names have been used for the procedures as for the original Basic commands.

For example, to draw on the opponent's screen a line to the co-ordinate 1000,1000 all you have to do is to say PROCdraw(1000,1000). The same idea is true with moving and plotting.

If you want to change the colour, either of text or graphics, on the opponent's screen, then the procedures "colour", "gcol" and "colchange" are available.

You can also set up text and graphics windows in the opponent's screen and clear either the text or the graphics screens.

You can change the graphics origin. You can delete characters. You can home the text cursor. You can make his computer "beep" and can move the cursor in each of the four directions.

There is also a command which enables you to send out single VDU commands, such as VDU20, in order

to restore the default logical colours.

If you want to print characters onto the opponent's screen then there are three procedures for this.

The first allows you to print at a specific location on the screen – the "print tab" command. Then you can print single strings using the PRINT command, and finally there is the "crlf" command, which allows you to produce a carriage return and a line feed.

It is necessary to send out both the carriage return and line feed since the auto line feed facility does not work when the characters are coming in from the RS423 input.

The procedures are there ready for you to use to write your own programs. The possibilities are endless. The only limit is on the amount of programming time that you have available.

If you want to start writing high speed interactive graphics programs for two computers, you will need to have the equivalents of these Basic procedures written as assembly language programs, and for full speed they will need to run as interrupt routines. But that's another story.

AEROSPACE SYSTEMS DEVELOPMENTS LTD

Besides offering a 'direct duplicating service' both for cassette and 5 $\frac{1}{4}$ " disc, we are also selling a whole variety of usual and unusual items, for the BBC Micro, listed below:

HARDWARE

Biomedical amplifier	£30.43
Lightpen and utility software	£35.00
Extender board (adds 64k of EPROM or 16k RAM)	£29.47
Eprom programmer	£60.00
Eprom eraser	with timer £30.00 without £25.00
Wabash diskettes	
5 $\frac{1}{4}$ " £2.25 each	(SS, SD) 40 Track or boxed (10) £16.00
5 $\frac{1}{4}$ " £3.25 each	(DS, DD) 80 Track or boxed (10) £25.00
Other discs include Maxell, Dysan, Memorex	P.O.A.
Various printer ribbons, blank cassettes, cassette labels, Continuous stationery 11.5 by 9.5	
1000 sheets	£6.50
2000 sheets	£13.00
(Carriage £1.50 and £2.80 on paper above)	
Various printers, (example) STAR 510	£277.00
STAR 515	£377.00
(Carriage £7 on printers)	
Manual for Disc upgrade	£2.50

SOFTWARE

WORDPROCESSOR (cassette and manual)	£8.50
Tape based 4k program. Fast operation with search and replace, insert and closeup, line length up to 240, justification, any page length.	

MAILER

.....	£7.50
Tape based mailing list program. Auto search for named records – any length up to 240 characters. Sort and merge save and load all or part of lists.	

UTILITY

.....	£7.50
Contains various utilities such as screen print and save, string and integer sort a disassembler, tape and bad program fix, graph plotter up to 5 curves.	

Tape and disc copying. Fast professional copying of cassette and disc. Prices on application, but around 40p per single sided cassette for quantities up to 500. This includes labels and plastic box. Post and packing extra (£2.50 up to 50 off, £1.00 for each extra 75 off).

Free general guide to using discs and printers – no charge, just a stamped addressed envelope!

PROGRAMS REQUIRED! 40% royalties and you keep copyright!
Games, utilities, applications packages. Dealer enquiries welcome!

* Our previous prices (see 'Micro User July/August' will remain static until first post 15th September, 1983
If you would like more information on our services and products, just write to the address below:


SPECIAL OFFER! ASD 5 $\frac{1}{4}$ " diskettes SS SD 40 £1.99 each DS DD80 £2.99. Ask for quantity discounts!

Send cheques and postal orders to:

ASD Ltd., 30 West End, Launton, Bicester, Oxon. Tel: 08692 2831

(No cheques cashed until goods ready for dispatch) Except where stated, prices include VAT and carriage.

C/WP OCTOBER OFFERS

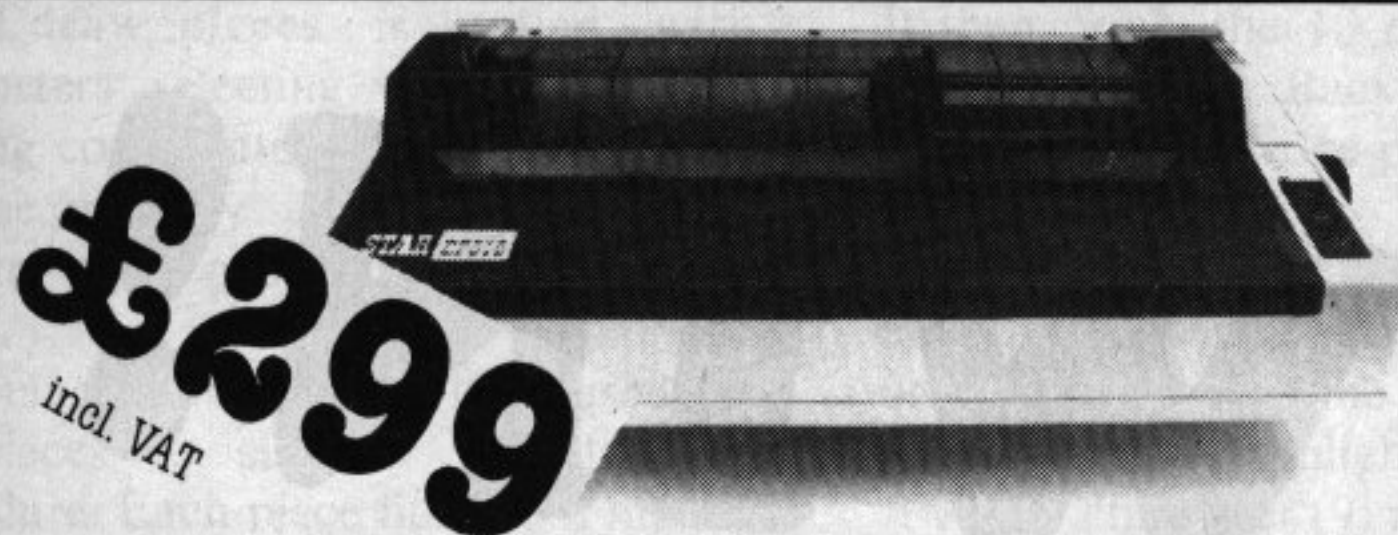

£299
incl. VAT

STAR DP510 – A GREAT PRINTER AT A MODEST PRICE

Probably the best value printer for the price. Has most of the features of the Epson MX80FT with which it is compatible. But

you also get an extended character set with italics and a 2k buffer. Excellent graphics. 100 characters per second.

THE NEW EPSON FX80 AT A PRIVILEGED PRICE



£403
incl. VAT

This magnificent new 160 characters per second printer offers a staggering range of facilities. Everything the MX80FT would do but faster. Includes italic characters, proportional spacing and user

down-loadable fonts. An outstanding printer producing beautiful graphics.

COMING SOON – THE FX80's little brother, the RX80 at only £309 including VAT.

SILVER

REED EX44



£475

ELECTRONIC TYPEWRITER AND DAISY WHEEL PRINTER

incl. VAT

This neat modern daisy wheel printer has been interfaced to a standard Centronics plug by the manufacturers for use with most micros. Great advantages

are portability and super print quality. Speed: about 10 cps. Very reliable. Buy this printer and get a first class typewriter with memory and erase ribbon.

MAKE IT BETTER STILL WITH A PRINTER BUFFER

Add a printer buffer to your Epson printer – any current model – and release your micro to do better things. Loads at 2000 cps. Fits internally in Epson. Serial or parallel.


16k buffer **£103**
incl. VAT

32k buffer **£144**
incl. VAT

SANYO 12 INCH MONITOR

A good-looking, high performance green screen monitor offered at a special price.

£113 incl. VAT

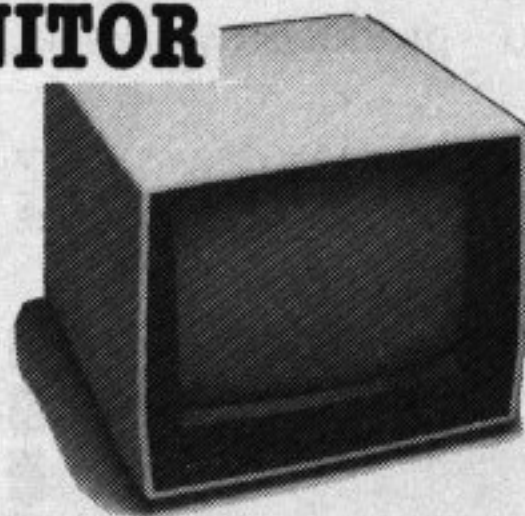

PAPER

Boxes of 2000 sheets of fanfold listing paper. Collect or pay carriage extra.

£12 incl. VAT per box.

CABLES

Cables to connect any of these printers to the BBC, or to most other microcomputers.

£21 incl. VAT

HOW TO PAY

All prices are cash only, and have been discounted by 10 per cent from current list price. Pay with cash, cheque, bankers draft, or major credit card. Goods paid for by cheque, unless covered by a Banker's guarantee, despatched after clearance.

C/WP

C/WP Computers

Willow House Willow Place London SW1P 1JH
Telephone 01-828 9000

Cross out whichever line does not apply

Please send me details of:

I enclose cheque for £_____ and am ordering:

- ☐ Star DP 510 Printer ☐ Print buffer ☐ 16k ☐ 32k
☐ Silver Reed EX44 ☐ Sanyo 12 inch monitor
☐ Epson FX80 ☐ Printer cables

Name _____

Company _____

Address _____

Telephone (day) _____

Every reader of The Micro User will be able to enter this month's competition. All you have to do is to complete the limerick which starts:

"There was a young man with a Beeb"

The most original, amusing (and printable) entry will be the winner. All you have to do is send it to us, on the coupon below, before October 31.

This month's prize, presented by Acorn computers, is a Telesoftware downloader.

This amazing piece of equipment allows the BBC Micro to load programs transmitted over the TV network.

The BBC's Ceefax service has already started broadcasting such programs, called telesoftware, which the lucky winner will be able to download for free!

You can also use it to take advantage of the BBC's vast Ceefax database.


The winner of June's competition, to devise a chess board for the BBC Micro, was Mr D. Hubbard, of Welwyn Garden City. He wins a trip for two to Hong Kong.

We publish below Mr Hubbard's description of his program, followed by the winning listing.

Write four lines of witty limerick and ...

WIN!

Acorn's revolutionary Telesoftware Downloader

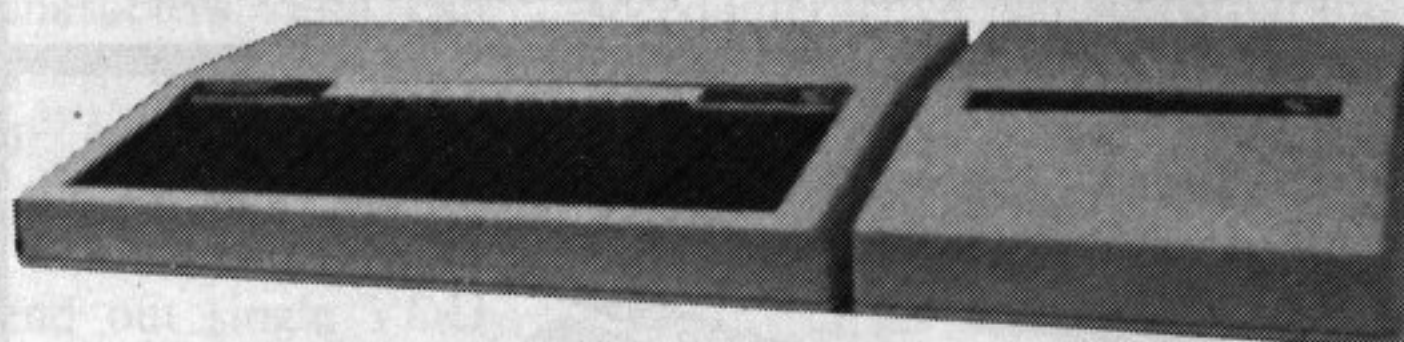

And here's the winning Chessboard – by its writer

THE program displays a chess board with all 32 pieces in their starting positions using a perspective view and highlights to give a suggestion of depth and realism.

Use is made of the facility for overlaying graphics characters as the picture is built up. Graphics mode 1 has been chosen because it gives equal resolution in the vertical and horizontal directions with 256 pixels available vertically and 320 horizontally. This mode also permits the use of four colours.

PROCget_ready performs initialisa-

tion. The text cursor is combined with the graphics cursor (VDU 5). This also permits overlaying of graphics characters.

Logical colour 1 is then reset to cyan and selected for the background. CLG clears the screen to this colour.

The logical colours for the chess pieces are then set up as integer variables **Black%** and **White%**. (Yellow is used as the actual colour for the white pieces to produce sufficient contrast.)

The chess board is drawn by **PROCdraw_board** which first defines

the characters required to display one square.

There are three rows of five characters for each square defined in such a way that an oblique shape can be drawn.

The eight rows of the board are drawn by calling **PROCdraw_row** with the coordinates for the start of each row.

PROCdraw_row first exchanges the foreground colour because the rows start alternately with a black or a white square.

The exchange algorithm is: $C_{n+1} = (A+B) - C_n$ which causes C to alternate between A and B (provided the initial value of C is either A or B).

The variable **Fgnd%** is alternated between 0 (black) and 3 (white) at line 4030.

The row of eight squares is drawn by calling **PROCdraw_square** with the appropriate starting coordinates for each square.

PROCdraw_square selects the required foreground colour (line 5030) and then alternates **Fgnd%** ready for the next square.

The cursor is moved to the specified origin and the three rows of defined characters are printed.

My entry for the limerick contest is:

There was a young man with a Beeb,

Name

Address

Tel. No

Post to: Limerick Contest,
Micro User, Europa House, 68
Chester Road, Hazel Grove,
Stockport SK7 5NY.

Back spaces (8) and a line feed (10) are used for re-positioning between rows.

Having produced the chess board the major black pieces are then drawn. **PROCdraw_pieces** is called with parameters selecting the colour and starting coordinates. These parameters become globally available to the individual piece procedures (lines 6020-6090).

A standard format has been used for the pieces to simplify the drawing procedure. Each piece fits into a matrix of 10 characters (two wide by five high) and is defined in three stages.

First is the main shape, which will be drawn in the colour of the piece.

Next are highlights, which only occupy the right hand half of the matrix. These are always drawn in white.

Finally, an outline is defined which will be drawn in cyan around the main shape to improve the contrast.

The procedures rook, knight, and bishop all follow the same pattern.

First **PROCclear** is called to produce null characters. This is because these three pieces are shorter than the king and queen and do not occupy the full 2 x 5 matrix.

Next follow the character definitions for the main shape, the highlights and the outline. The piece is plotted by **PROCdraw_piece**.

The procedures for king and queen first define the characters for the top part of each piece and then call a common **PROCroyal_base** which

defines the remaining six character block. **PROCdraw_piece** completes the process.

PROCdraw_piece sets the main colour and moves to the start position. It then prints the 10 characters giving the main shape. Backspaces and line-feeds are used to re-position for each row.

Next, the colour is changed to white and the cursor is moved back to the origin ready for the five characters displaying the highlights.

A tab character (9) moves the cursor from the origin one space to the right before printing this column.

The colour is then changed to cyan and the 10 characters for the outline are printed. Before ending this procedure the coordinates are adjusted to the starting position of the next piece.

Having drawn the major black pieces, the main program now calls **PROCdef_pawn** to set up the

characters for a pawn.


The pawns use a matrix of 2 x 3 characters which are defined for main shape, highlights and outline in a similar manner to the major pieces.

The main program sets the initial co-ordinates for the row of black pawns and zeroes the count of **pawns_drawn**. It then repeats the procedure to draw a black pawn until eight have been drawn.

PROCdraw_pawn is very similar to **draw_piece** except that it uses a smaller matrix. Before ending it adjusts the coordinates ready for the next pawn and also increments the count of **pawns_drawn**.

The main program continues in a similar way to draw the white pawns and then the white pieces.

Finally, the cursor is moved to the graphics origin so that the prompt does not appear when the program terminates.

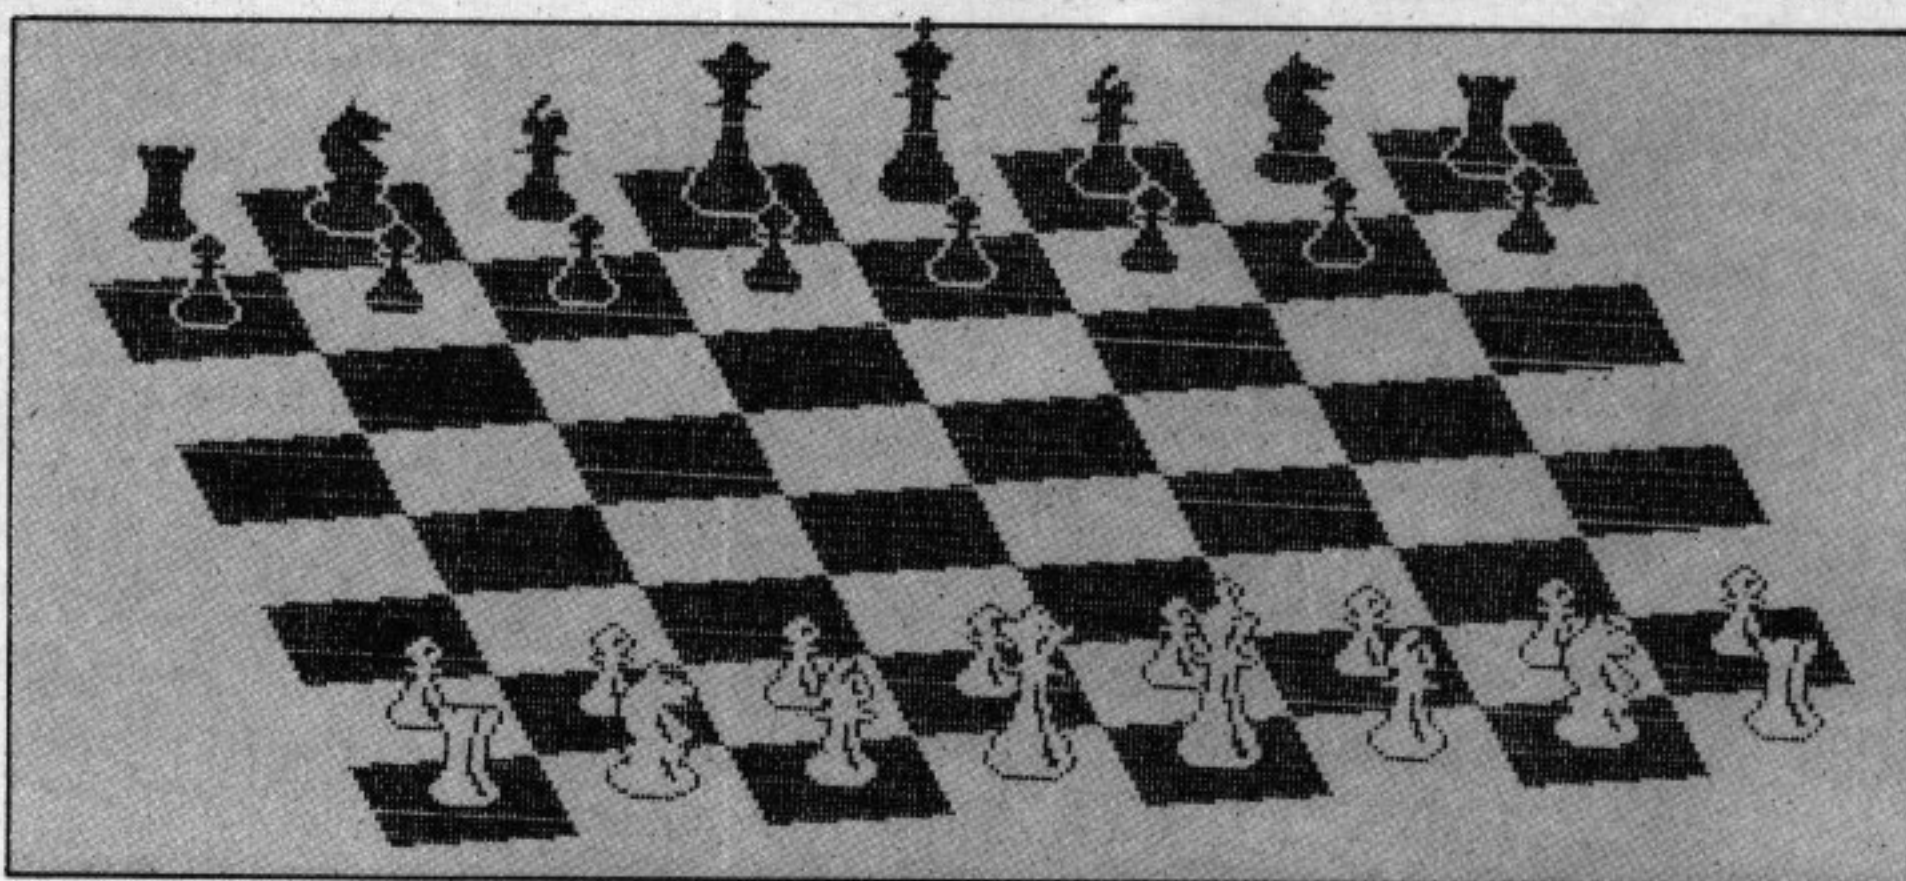

A dot matrix printout of the winning entry

CHES LISTING

```
1000 MODE 1
1010 PROCget_ready
1020 PROCdraw_board
1030 PROCdraw_pieces(Black%,48,800)
1040 PROCdef_pawn
1050 OrigX%=80
    : OrigY%=672
1060 pawns_drawn=0
1070 REPEAT
1080 PROCdraw_pawn(Black%)
1090 UNTIL pawns_drawn=8
1100 OrigX%=240
    : OrigY%=352
1110 pawns_drawn=0
1120 REPEAT
1130 PROCdraw_pawn(White%)
1140 UNTIL pawns_drawn=8
1150 PROCdraw_pieces(White%,272,352)
1160 MOVE 0,0
```

```
1170 END
1180 REM
2000 REM *** INITIALISATION ***
2010 DEF PROCget_ready
2020 VDU 5
2030 VDU 19,1,6,0,0,0
2040 GCOL 0,129
2050 CLG
2060 Black%=0
2070 White%=2
2080 ENDPROC
2090 REM
3000 REM *** DRAW THE CHESS-BOARD ***
3010 DEF PROCdraw_board
3020 REM character definitions:
3030 REM 5 characters for top row
3040 VDU 23,224,0,0,0,0,0,0,15
3050 VDU 23,225,0,0,0,0,0,0,15,255
```

```
3060 VDU 23,226,0,0,0,0,0,15,255
    ,255
3070 VDU 23,227,0,0,0,0,0,15,255,255
    ,255
3080 VDU 23,228,0,0,0,0,0,128,128
    ,192
3090 REM ends of middle row
3100 VDU 23,229,255,127,127,63,63
    ,31,31,15
3110 VDU 23,230,192,224,224,240,240
    ,248,248,252
3120 REM 5 characters for bottom
    row
3130 VDU 23,231,15,7,7,3,3,1,1,0
3140 VDU 23,232,255,255,255,255,255
    ,255,255,240
3150 VDU 23,233,255,255,255,255,255
```

Turn to Page 110

FINANCIAL GAMES

GREAT BRITAIN LTD.

AS SEEN ON
SWEDISH TV

Ever thought you could run the country better?

Here is your chance.

As Prime Minister (of the party of your choice), you have to guide the country through its social and economic ills for five years, then put yourself up for re-election.

"Great Britain Ltd is easily as exciting, and certainly more satisfying, than any game of space invaders"

Micro User, June '83

"A must for all budding politicians"

Computer Answers, June '83

"Thoroughly enjoyable and worthwhile decision-making activity and, as such, it can be thoroughly recommended"

Educational Computing, June '83

£5.95 with full instructions

INHERITANCE

Have you ever wondered what you'd do if you came into some money? Would you be able to invest it and watch it grow, or maybe start a small business and become a millionaire. With Inheritance you have the chance to find out.

"A great game, really two games for the price of one"

Micro User, June '83

£5.95

with full instructions

WORLD TRAVEL GAME

A game for 1 or 2 players. Rush around the world collecting souvenirs. Keep your head and try to avoid the dangers inherent in such a journey.

"Exciting, competitive and even educational – not to be missed"

£6.95

with world map and full instructions

★ **Special Offer to Micro User readers**
ALL 3 GAMES £16.95

SIMON W. HESSEL SOFTWARE

(Dept. B1)

15 Lytham Court, Cardwell Crescent, Sunninghill, Berks.

Telephone: Ascot 25179

24HR DESPATCH – PLEASE ADD 30p P & P
– UNLIMITED GUARANTEE –

electron

user

Vol. 1 No. 1

October 1983

CASTING AGENCY




MEET MICRO KID



SOFTWARE SURGERY



SOUNDS EXCITING

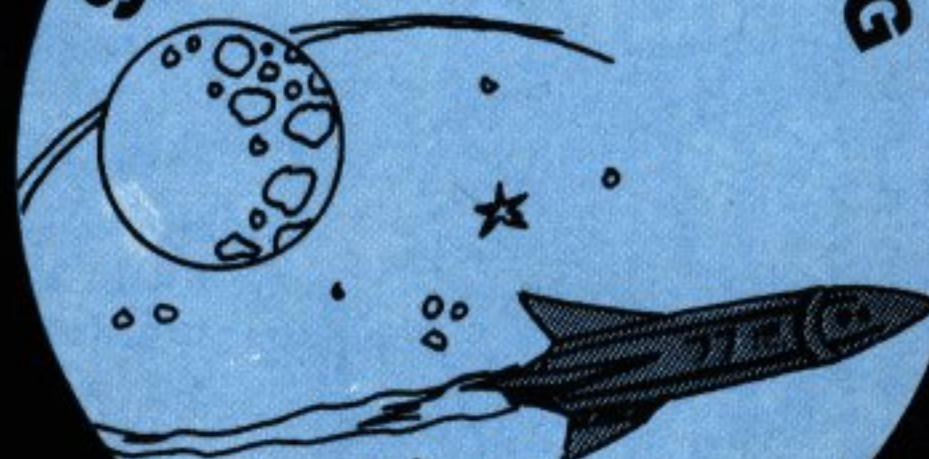

The easy way to learn how to program your Electron

Look, listen and
learn about ...

- ★ *Designing programs*
- ★ *Editing*
- ★ *Graphics*
- ★ *Arrays and data*

This 60-minute videotape presents an easy-to-understand introduction to Basic programming on the Electron. PLUS a number of programs on the sound track which you can load into your Electron and use as part of the course.

ONLY AVAILABLE FROM
electron user

CONTAINS
PROGRAMS
TO TRANSFER
TO YOUR
COMPUTER.

An introduction to computer programming the ELECTRON micro computer in basic, to help you write your own programs.

£19.95
inc. VAT, P&P

**ORDER
BY
POST
TODAY!**

Please send me copies of your
Electron videotape at the special price of £19.95
(including VAT and P&P). Total: £
Please state format required ☐ VHS ☐ Betamax

Name

Address

.....

Signed

Send to: Electron User, FREEPOST,
Europa House, 68 Chester Road,
Hazel Grove, Stockport SK7 5NY.
(No stamp needed if posted in UK).

Please indicate method of payment (✓)

- ☐ Access/Mastercharge/Eurocard
- ☐ Barclaycard/Visa
- ☐ American Express

Card No.

Expiry date

- ☐ Cheque/PO made payable to
Database Publications Ltd.



AFTER months of speculation, the Electron has been finally launched with all the glitter of a show business first night.

Members of the computer press were ushered into the ballroom of the plush Park Lane Hotel to be greeted by a theatre set that would have done the Old Vic proud.

At the far end of the room was a large, "typical" detached house, from the front door of which stepped TV personality Cliff Michelmore.

His welcome to the press was par for the

course. He implied that we were witnessing an important, if not historic event: the launch of a microcomputer that truly ushered in the era of the home computing.

We then settled back to watch a film (projected onto a convenient garage door) that extolled the power and virtues of the micro-chip in increasingly exaggerated terms.

All this provoked an outburst from the audience. Several of the journalists turned to see

who had beaten them to the punch.

From the outer darkness appeared Wendy Craig, playing the role of a poor little housewife, baffled by all this, sceptical of the use of microcomputers in the home and not wanting to be blinded by science...

From then on Cliff and Wendy treated the audience to a catalogue of microcomputer clichés and truisms. The gimmicks included Wendy talking to the Electron (which of

course answered back) and a sequence in which she had a dialogue with a screen "twin" whose Electron had enhanced her life beyond measure.

Behind the drama of the launch, there was a very serious intent. Said Chris Curry, managing director of Acorn: "We believe the home computer has at last grown up. With the Electron, the micro is no longer just a clever toy for bright children.

"It is an all-purpose intelligent tool – a tool that can educate, entertain, help run the home and be a window on a vast expanse of electronic information".

Acorn see the Electron becoming a

familiar part of home life. The believe that it will bring micro-computing to people as yet untouched by the computer revolution – particularly women.

Continued Chris: "At Acorn we also see our approach to home computing as a first step towards combating a major problem of computing today – the non-involvement of women.

"A recent survey spelled out the dangers. Girls are 13 times less likely than boys to use a micro at home, and only 4 per cent of micro users are mothers.

"We hope that the combination of the Electron's educational pedigree and its potential application in so many areas relevant to women will help to reverse this trend".

Only time will tell if the Electron will achieve this goal. What is certain is that with this exceptional machine. Acorn are off to a flying start.



ALL the program listings printed in Electron User are also suitable for keying into the BBC Micro. Any exceptions will be indicated by the sign on the left, together with any changes in the listings that might be necessary.

Whether you're one of the proud few who own an Electron, or one of the many waiting to collect one . . .

Welcome to Electron User!

THIS is the first issue of a new magazine devoted entirely to the world of Acorn's latest computer – the Electron.

Month by month we'll be showing you how to make the most of your Electron. Its many special features place it far ahead of the competition, and we'll explain how to use them to full advantage.

As you can see already, we'll have plenty of listings for you to enter – games,

graphics, educational and domestic programs. We'll cover the lot.

We will be using our first-rate team of writers to ensure that, beginner or expert, you'll find articles that you really understand.

The important thing is that Electron User is written by Electron users for Electron users. We're very keen to hear how you think the magazine should be going – and we'll act on

any good ideas put forward.

And, of course, we're more than willing to consider your latest "Electronic" explorations for publication.

At the moment we're coming to you courtesy of our big brother, The Micro User. From December onwards we'll be a big magazine in our own right.

Now that's a Christmas present that no Electron user can be without!

**electron
user**

Electron User welcomes program listings and articles for publication. Listings should be accompanied by cassette tape or disc. Send to:

Electron User, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

Electron User is an independent publication. Acorn Computers Ltd are not responsible for any of the articles in this issue, or for any of the opinions expressed.

© 1983 Database Publications

Electron

HERE'S a short program to draw three-dimensional shapes on your Electron. You only need to type up to line 260 to make the program work.



If you want a different shape, type in the rest of the program and change the FNA in lines 90 and 200 to FNB – or FNC etc – up to FNH.

To increase the density of the picture, reduce the step lines 50, 70, 160 and 190 to 0.1, for example.

Note that it will then take much longer to draw. To reduce density and speed up the plotting, increase the step.

To change the colour while the program is running press the SHIFT key.

IT'S ALL A PLOT

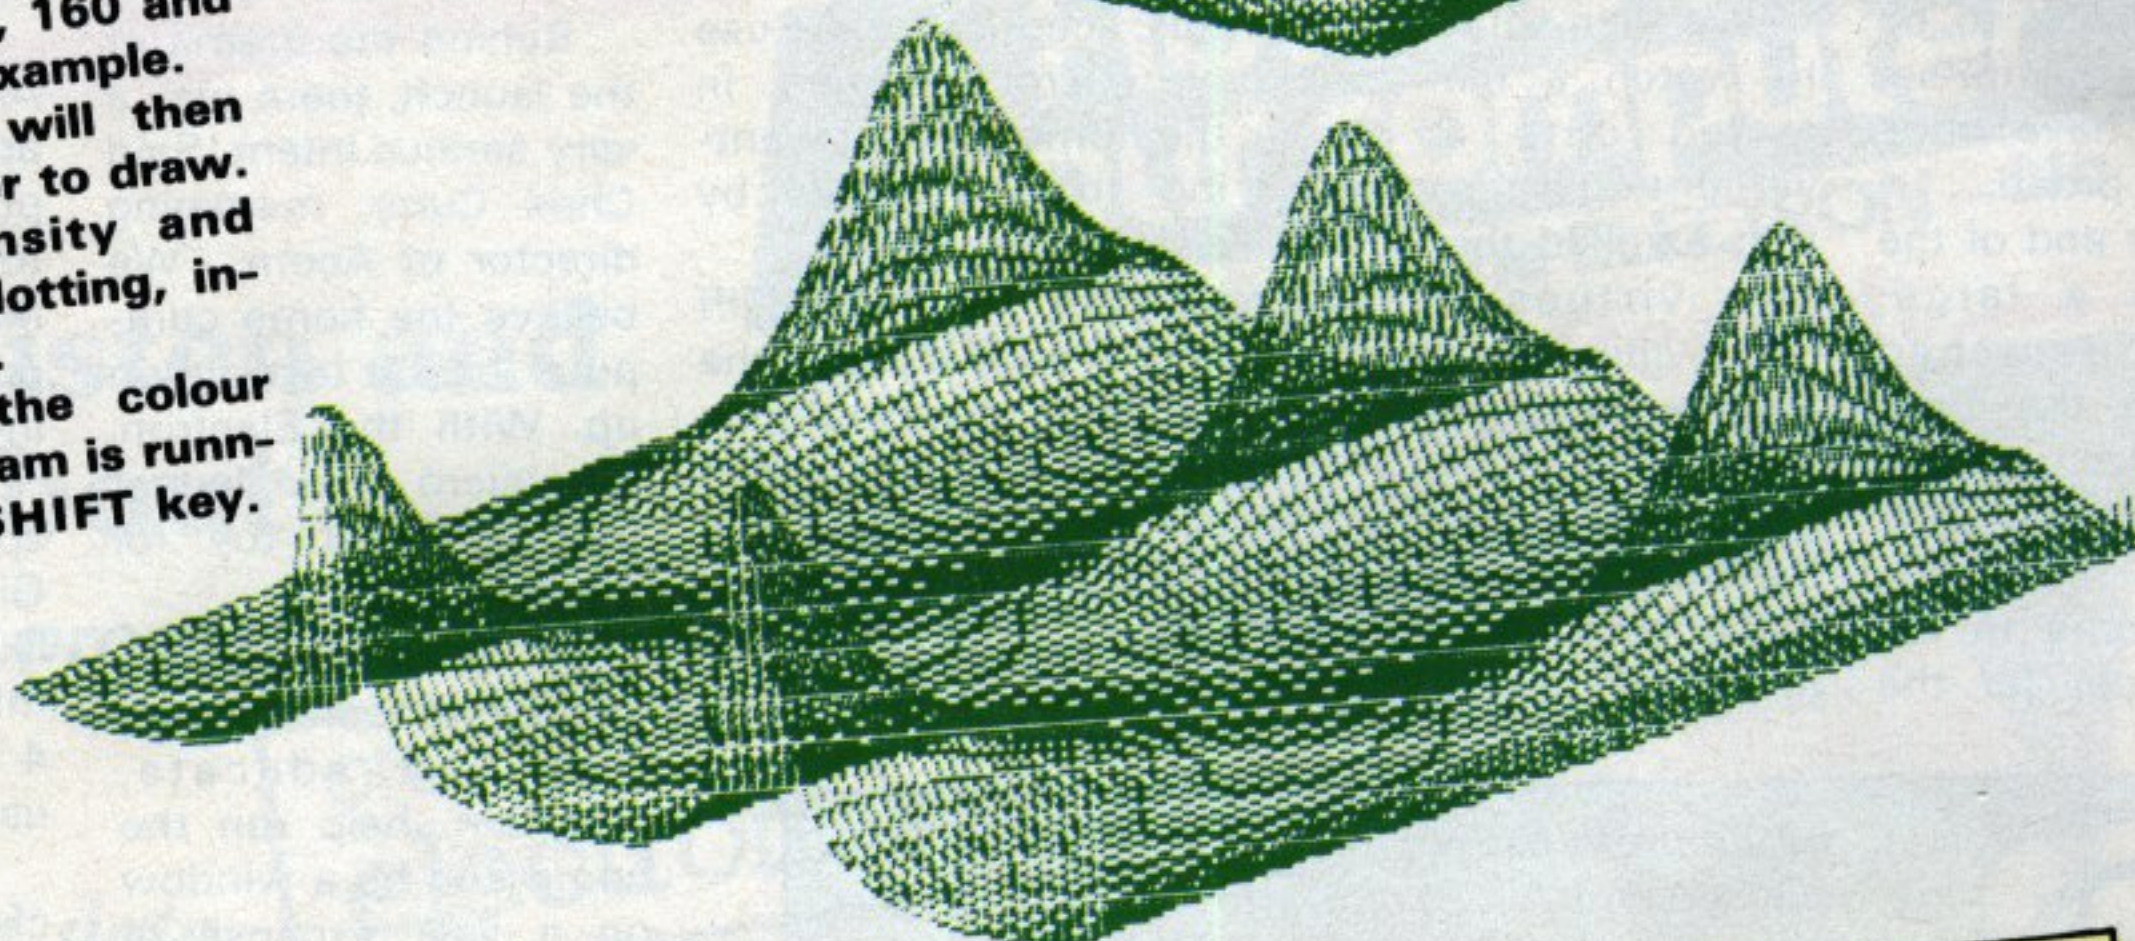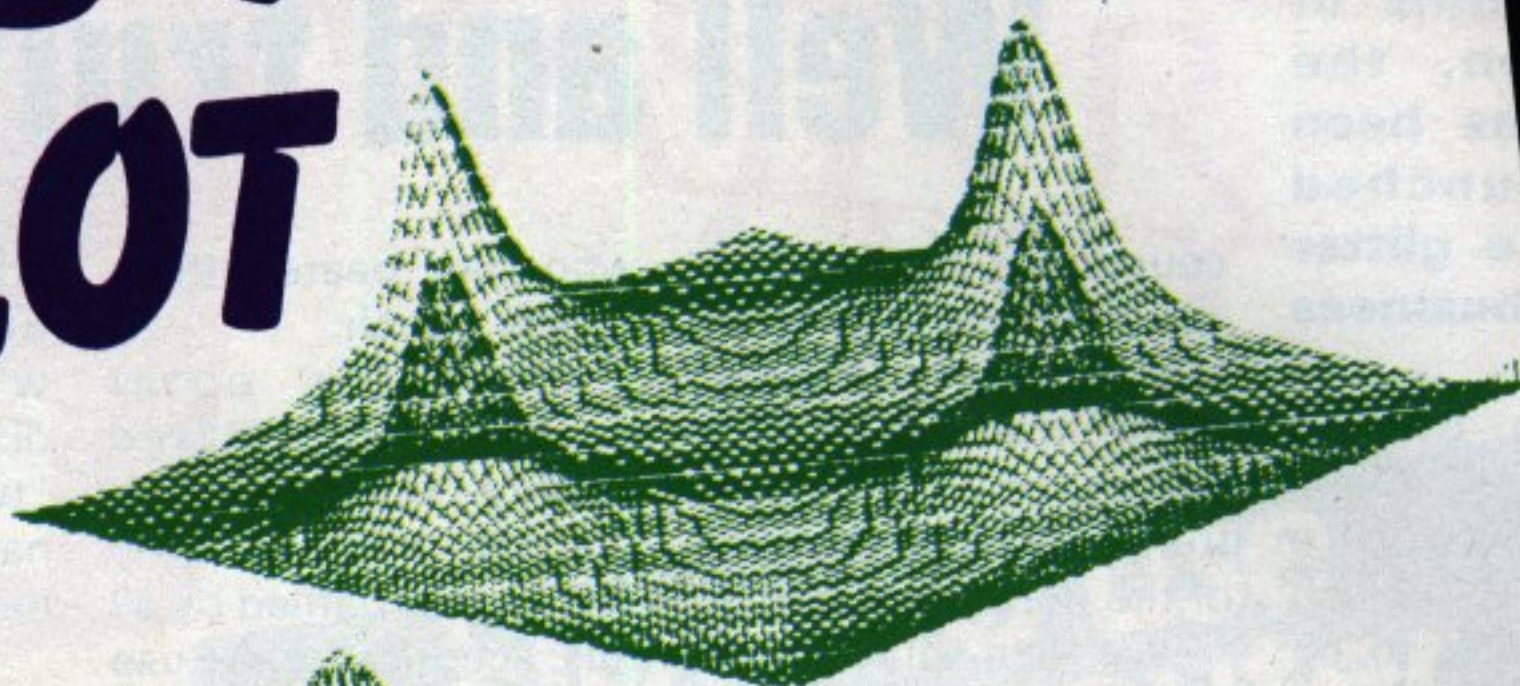

```
10 REM 3D-PLOT
20 REM (C)ELECTRON USER
30 MODE 0
40 X=0
```

```
    :Y=0
50 VDU 29,0;400;
60 FOR Y=0 TO 8 STEP .5
70 A=69
80 FOR X=0 TO 8 STEP .5
90 GCOL 0,7
100 PLOT A,80*(Y+X),(Y-X+2+
    FNA(0))*30
110 A=5
120 IF INKEY (-1)
    THEN VDU 19,7,RND(7);0;
130 NEXT X
140 GCOL 0,7
150 DRAW 80*(Y+8),(Y-X+4)*30
```


```
160 NEXT Y
170 FOR X=0 TO 8 STEP .5
180 PLOT 69,80*X,-6*X+12
190 GCOL 0,0
200 FOR Y=0 TO 8 STEP .5
210 PLOT 5,80*(Y+X),(Y-X+2+
    FNA(0))*30
220 IF INKEY (-1)
    THEN VDU 19,7,RND(7);0;
230 GCOL 0,7
240 NEXT
    :NEXT
250 END
260 DEF FNA(A)
270 =1/(COS (X*2)*TAN (X*2)*
    COS (Y/2)+1.1)
280 DEF FNB(A)
290 =1/(COS (X/2)*COS (Y/2)+1
```

```
    .1)
300 DEF FNC(A)
310 =1/(COS (X)*COS (X)*
    COS (Y)+1.1)
320 DEF FND(A)
330 =(X*COS (Y/2)*(Y*
    SIN (X)/2)
340 DEF FNE(A)
350 =1.5/(COS (X)*SIN (Y/2)+1
    .1)
360 DEF FNF(B)
370 =1/(COS (X)*SIN (Y)+1.1)
380 DEF FNG(C)
390 =1/(COS (X)*SIN (X/2)*
    COS (Y)+1.1)
400 DEF FNH(C)
410 =1/(COS (X)*SIN (X)*
    COS (Y)+1.1)
```





WEBWAVE-A SINE OF THE TIMES?

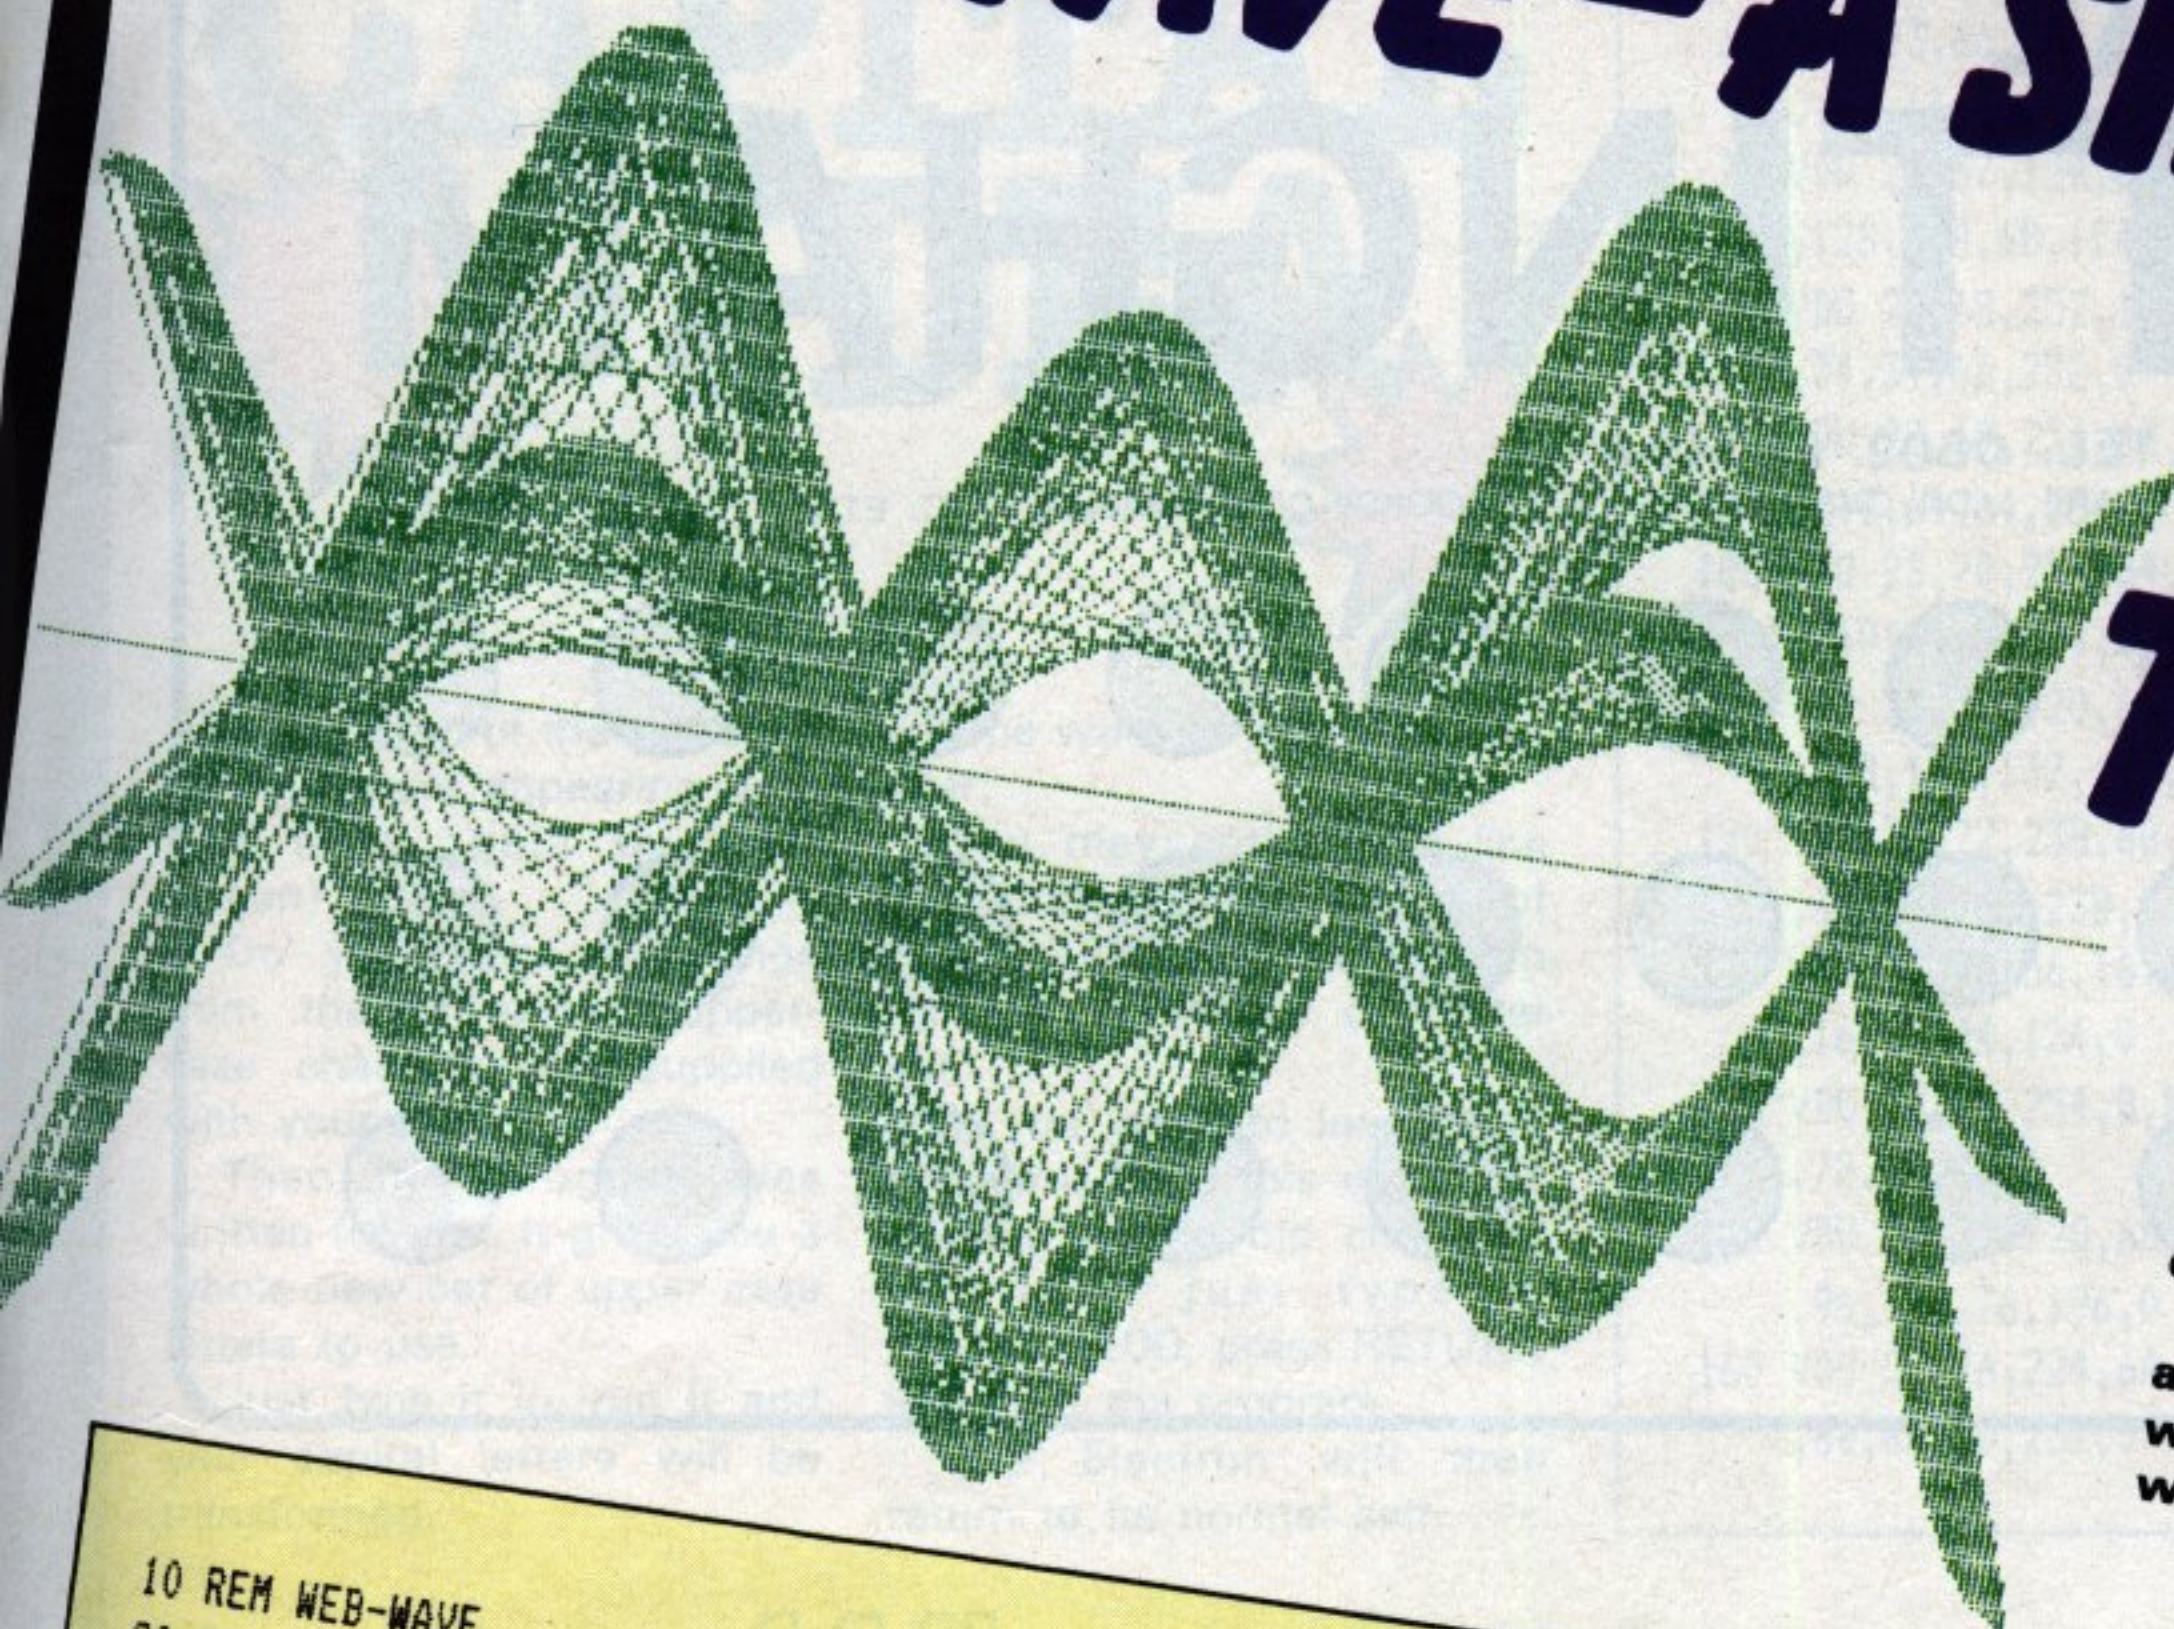

THIS listing uses your Electron's superb graphics facilities to picture three interacting sine waves in different colours.
If you don't know what a sine wave is, don't worry, just admire the art work!

```
10 REM WEB-WAVE
20 REM (C)ELECTRON USER
30 MODE 6
:PRINT "I'm doing some calculatin
g..."
40 DIM C(255)
:FOR IZ=0 TO 255
:C(IZ)=COS (IZ/20)
:NEXT
50 DEF FNcos(AZ,BZ)=C(AZ/5)*BZ
60 MODE 1

:VDU 23;B202;0;0;0;
70 DRAW 0,1023
80 DRAW 1279,1023
90 DRAW 1279,0
100 DRAW 0,0
110 VDU 29,0;511;
120 MOVE 0,0
:DRAW 1279,0
130 PROCCurve(1,500)
140 PROCCurve(2,-350)
150 PROCCurve(3,200)

160 REPEAT UNTIL FALSE
170 DEF PROCCurve(COLZ,HEIGHTZ)
:CZ=30
:GCOL 0,COLZ
180 REPEAT MOVE 0,HEIGHTZ
190 FOR XZ=0 TO 1279 STEP CZ
200 DRAW XZ,FNcos(XZ,HEIGHTZ)
210 NEXT
220 CZ=CZ+5
230 UNTIL CZ>325
240 ENDPROC
```

THE
MICRO




KID

OK, SO I'M AT THE
FOREFRONT OF
TECHNOLOGY



PRIDE!

I'M A MASTER
OF THE
MICRO

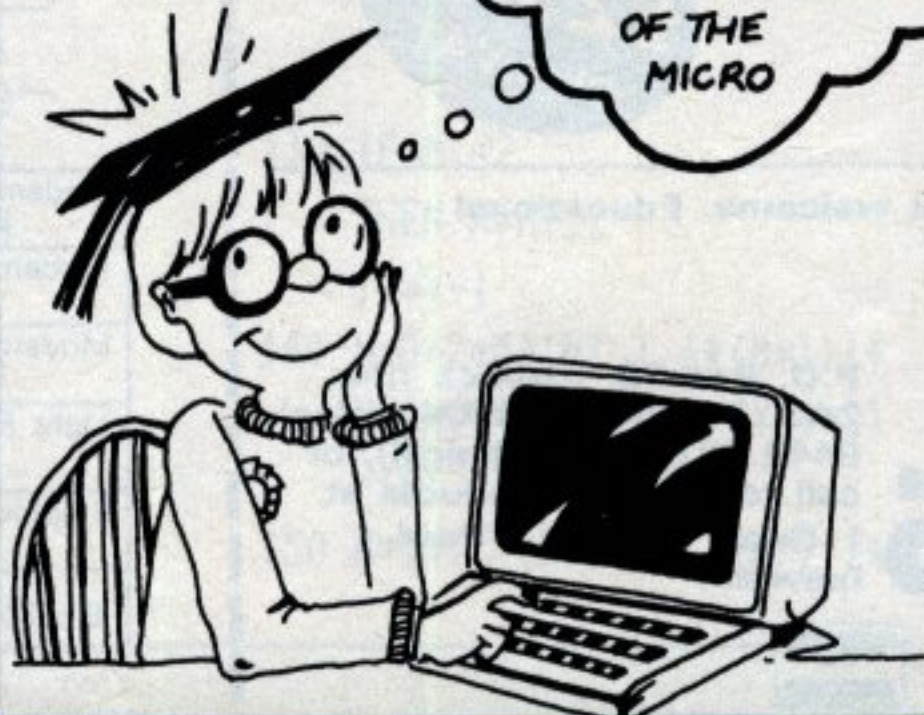

I'VE ALSO GOT
VERY SORE
FINGERS!



computer market


COMES TO

CENTRAL

NOTTINGHAM

27 GOOSE GATE. TEL. 0602 586454

HOME AND EDUCATIONAL SOFTWARE, ADD-ONS, INTERFACES, BOOKS, CONSUMABLES ETC. ETC.

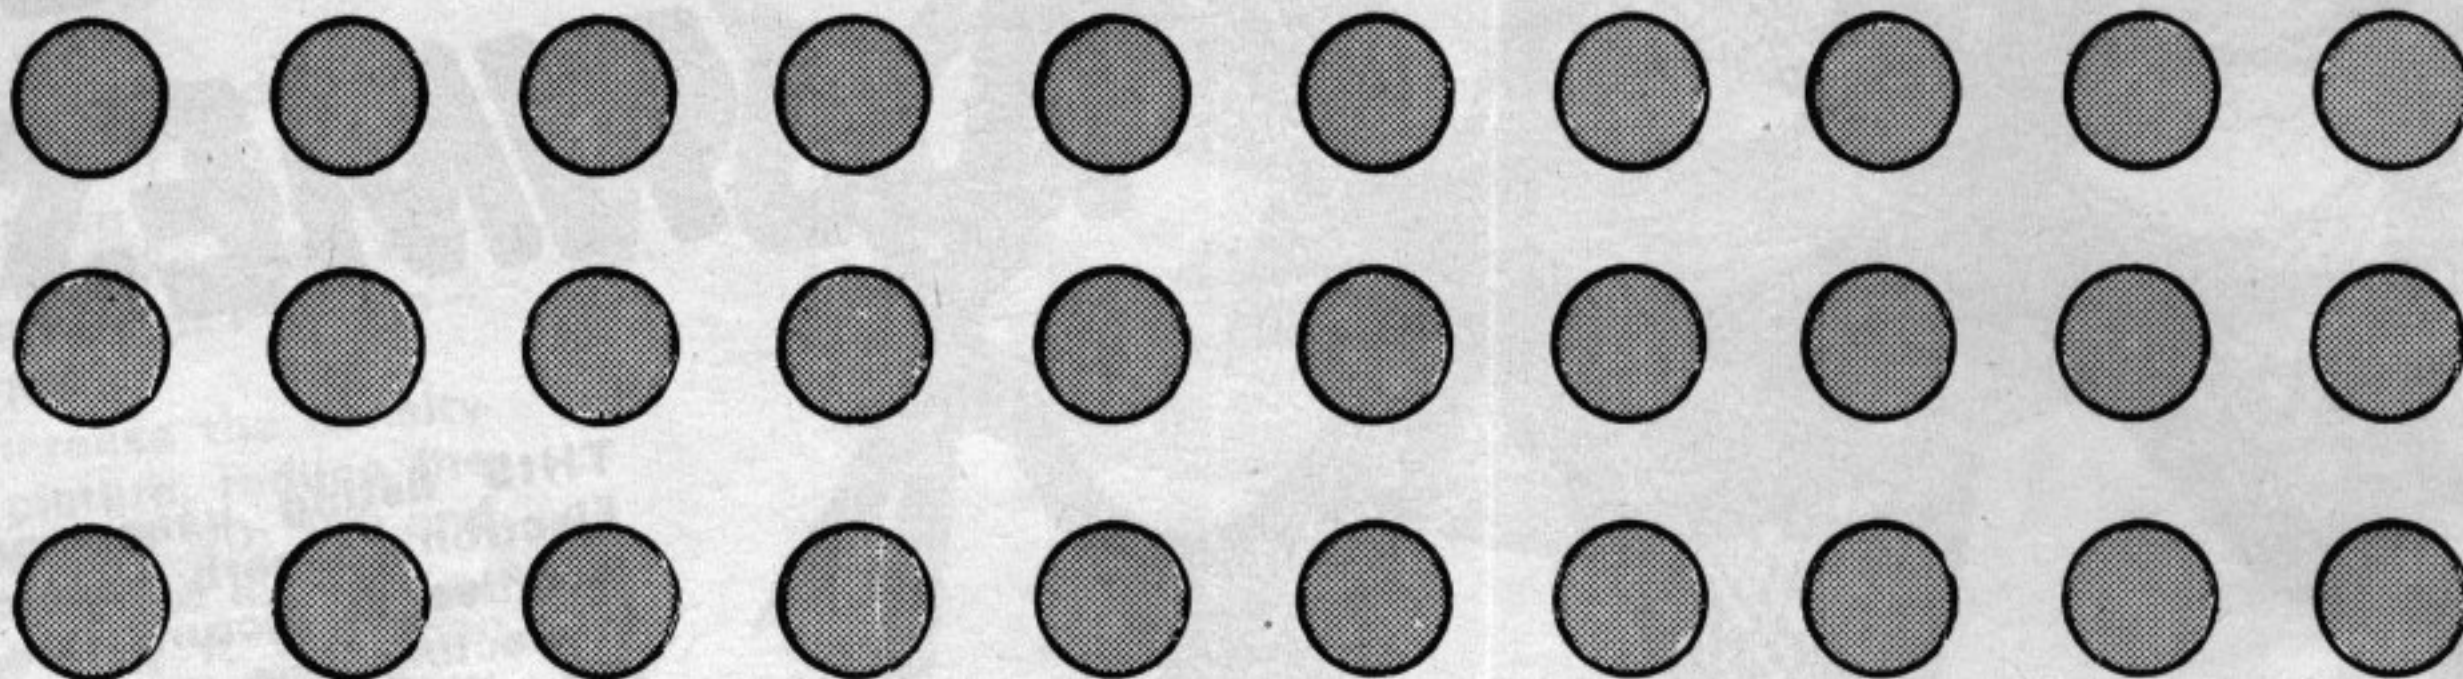

Light Pen

£12.95
plus VAT



For BBC 'B' allows you to draw direct on the screen with fine or thick lines, or use it just like a paintbrush. Eight-colour palette, excellent software, state-of-the-art electronics and all ready to plug in and use for

NEW
FOR
BBC
B



£69.95
plus VAT

Modems

Data communication
link with other computers
over normal telephone lines

To let your BBC 'B' talk over the phone to other computers anywhere in Europe. We have either an acoustically coupled Modem – no direct connection to the phone lines – or a hard wired Modem which needs connection, through our BT approved isolating transformer, across the phone lines. Both RS232 compatible, full duplex, and complete ready to use on the BBC. You've heard about War Games, now try your hand at interrogating other computers! Adaptors available for many other computers at extra cost.

Call for more details.

FREE! Directory of direct access numbers and codes for major computer installations here and abroad.

Graphics Digitizer

rectangles, triangles, fill shapes with colour, save to disc, tape, or printer under filenames, all with ease and accuracy. It's user friendly, and supplied tested and ready to go at just

with latest super programme allows you to transfer drawings straight onto the screen of your BBC 'B', change colours, draw automatic circles,



£29.95
plus VAT

Official schools and company orders welcome. Educational discounts.

Suppliers to HM Ministry of Defence.

MINOR MIRACLES

P.O. Box 48, Ipswich IP4 2AB. Tel: 0473 50304 (sales), 0449 721888 (technical), or call to see our products at 1 Great Colman Street, Ipswich.



CONTROL INTERFACES

A full range of digital control interfaces for the BBC 'B' allowing you to switch low or high voltages on external equipment, or control delicate electronic experiments. We have supplied these interfaces to schools, colleges and government departments throughout the world. Call or write for details. Prices from around £24.00

Name _____

Address _____

Make of Computer _____

	Total	Qty.	Sub Total
Modem Acoustic or Hardwire (circle which) £69.95 + £2.22 p&p + £10.83 VAT	£83.00		
Modem Interface ZX81/Spectrum £29.95 + £1.14 p&p + £4.66 VAT	£35.75		
Modem Interface Vic 20/Dragon £24.95 + £1.14 p&p + £3.91 VAT	£30.00		
Light Pen (BBC 'B' or Spectrum) £12.95 + 62p p&p + £2.03 VAT	£15.60		
Graphics Digitizer (BBC 'B' only) £29.95 + £1.35 p&p + £4.70 VAT	£36.00		

B'card/Access No. _____

or cheque enclosed for £ _____



A CAPITAL IDEA

ARE you tired of the same old boring letters appearing time and time again on your screen?

Do you want a change from the run-of-mill upper-case character set supplied with your Electron?

Then this program was written for you. It gives you a whole new set of upper case letters to use.

Just type it in, run it and your capital letters will be transformed.

One word of warning however:

You may notice that line 30 changes the value of PAGE. This is to make room for the expanded character set.


If you want to load other programs after this using the normal, boring old character set then just type in PAGE=&E00, press RETURN and load the program.

The Electron will then return to its normal self.

```

10 REM CAPITAL IDEA
20 REM (C) ELECTRON USER
30 *FX20,5
40 PAGE =PAGE +&500
50 VDU 23,65,56,68,68
  ,68,124,68,238,0
60 VDU 23,66,240,72,72
  ,124,66,66,252,0
70 VDU 23,67,124,68,128
  ,128,128,68,124,0
80 VDU 23,68,252,18,34
  ,34,34,66,252,0
90 VDU 23,69,254,64,64
  ,240,64,64,254,0
100 VDU 23,70,254,64,64
  ,240,64,64,64,0
110 VDU 23,71,120,68,64
  ,128,142,132,124,0
120 VDU 23,72,238,68,68
  ,68,124,68,238,0
130 VDU 23,73,56,16,16
  ,16,16,84,124,0
140 VDU 23,74,254,8,8,72
  ,72,72,48,0
150 VDU 23,75,228,68,88
  ,96,120,76,196,0
160 VDU 23,76,224,64,64
  ,66,66,70,252,0
170 VDU 23,77,40,108,84
  ,84,84,84,214,0
180 VDU 23,78,198,100,84
  ,84,84,76,198,0
190 VDU 23,79,60,36,66
  ,66,66,36,60,0
200 VDU 23,80,252,66,66
  ,252,64,64,224,0
210 VDU 23,81,60,66,66
  ,82,74,68,58,0
220 VDU 23,82,252,66,66
  ,240,80,88,198,0
230 VDU 23,83,124,130,128
  ,120,4,132,120,0
240 VDU 23,84,126,82,16
  ,16,16,20,60,0
250 VDU 23,85,238,68,68
  ,68,68,68,56,0
260 VDU 23,86,238,68,68
  ,108,40,40,16,0
270 VDU 23,87,198,84,84
  ,84,84,108,40,0
280 VDU 23,88,198,100,28
  ,48,104,76,198,0
290 VDU 23,89,238,68,68
  ,68,56,16,124,0
300 VDU 23,90,252,132,140
  ,48,66,66,126,0
  
```

What day were you born?

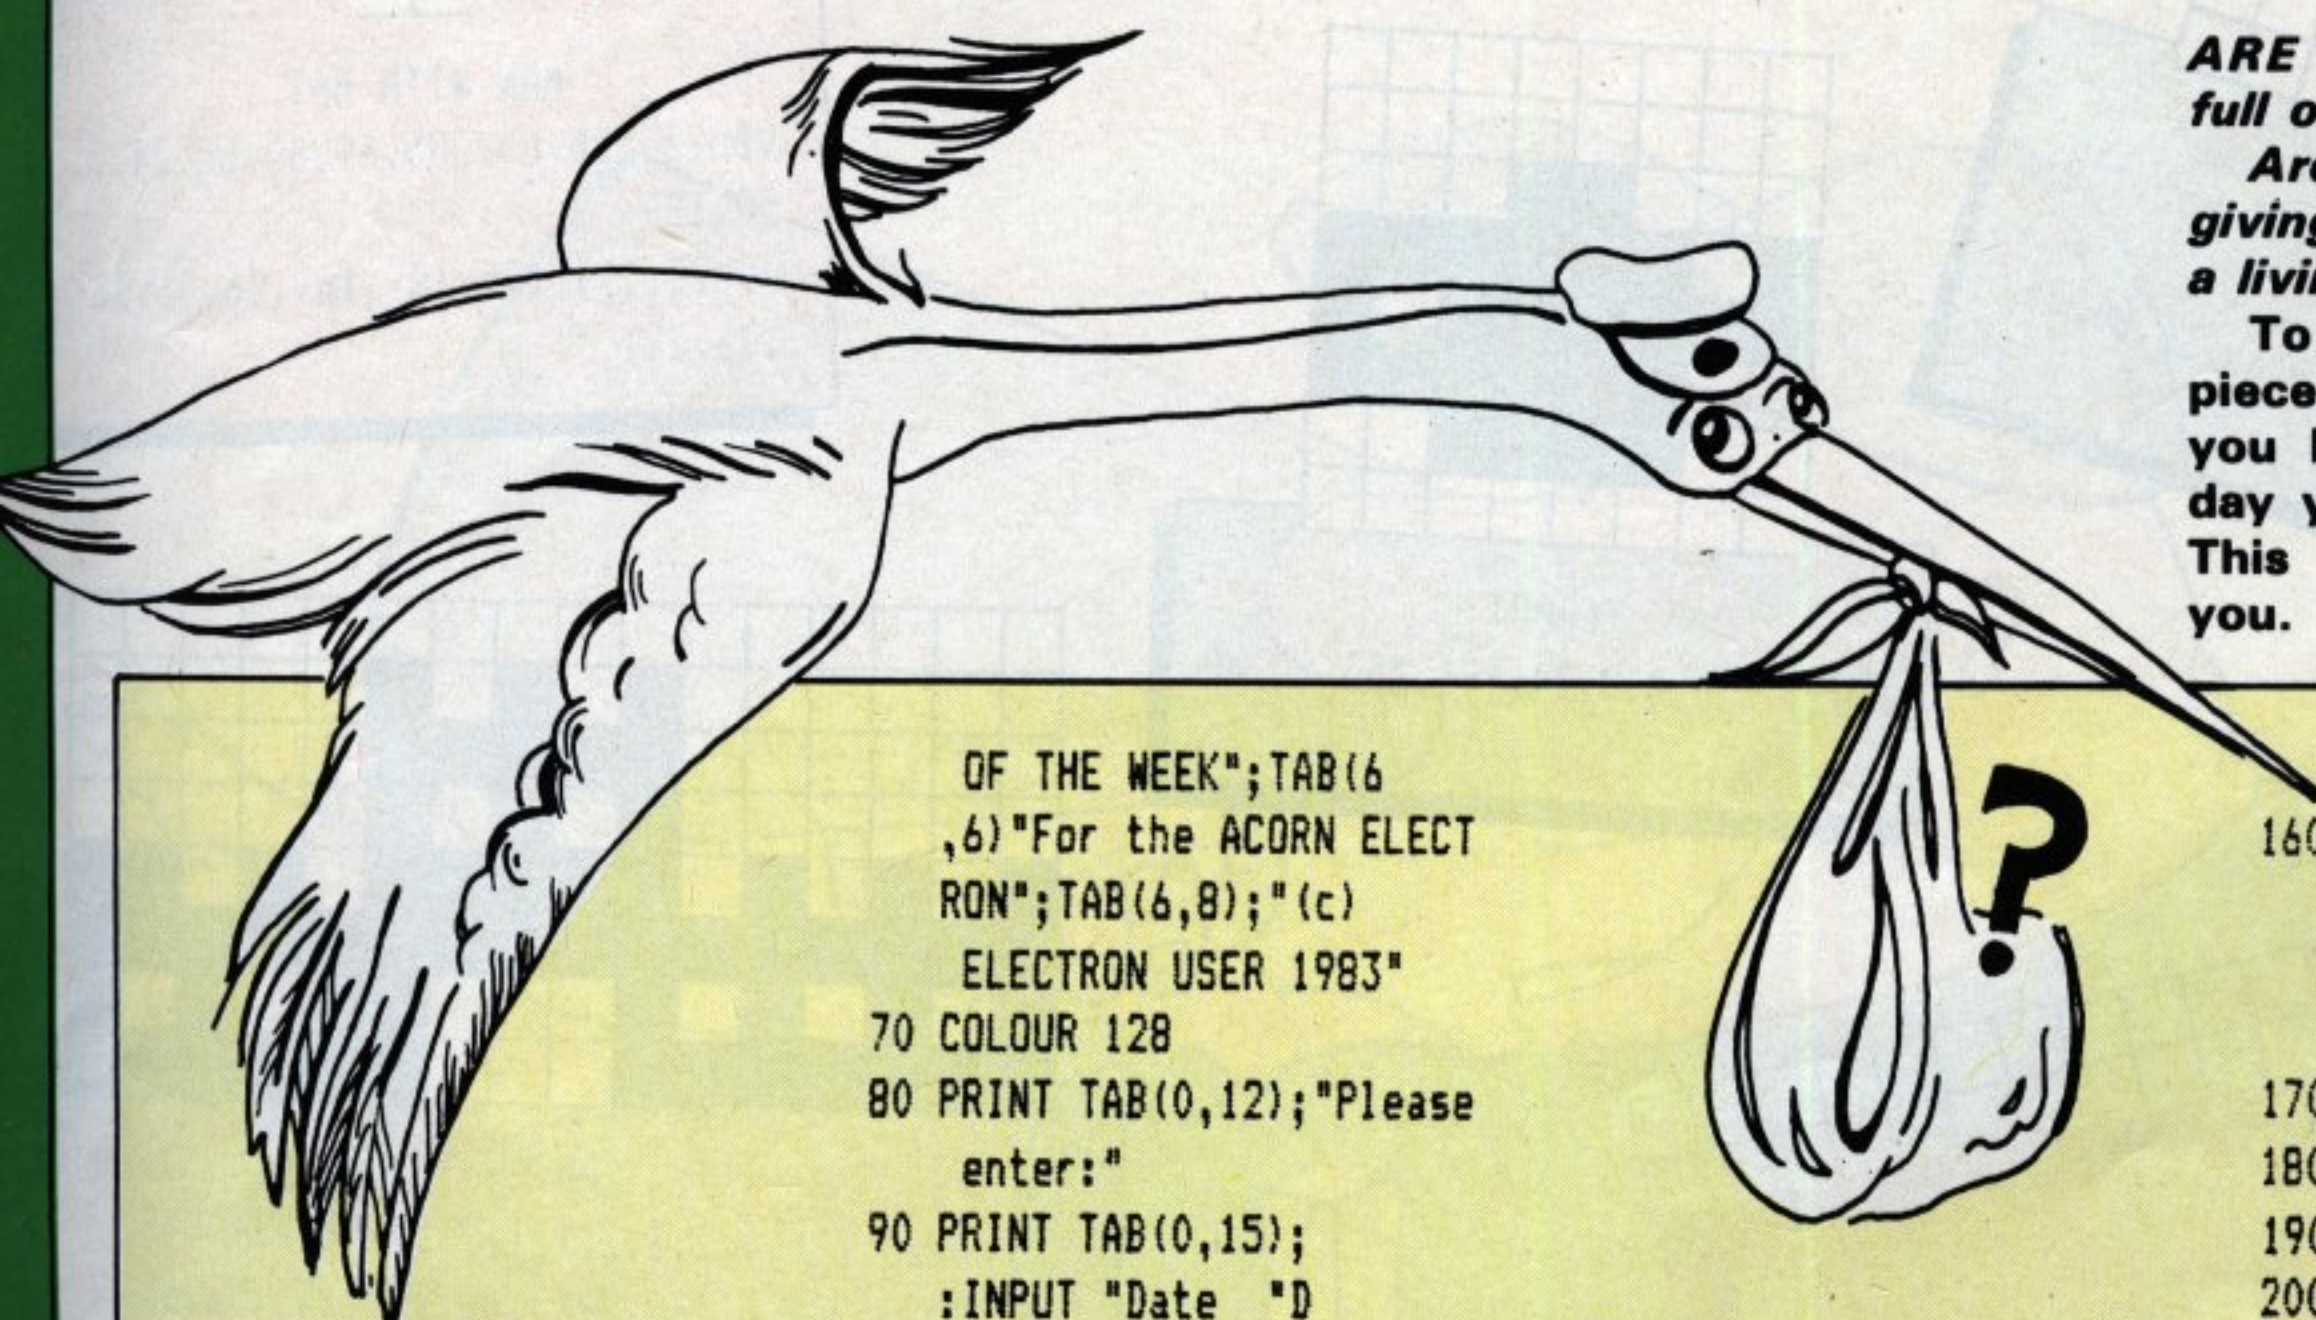

ARE you fair of face or full of grace?

Are you loving and giving, working hard for a living?


To posses this initial piece of self-knowledge you have to know the day you were born on. This program will tell you.

```


10 REM DAY OF THE WEEK
20 REM (C)ELECTRON USER
30 MODE 1
40 VDU 19,7,15;0;
50 COLOUR 129
  :COLOUR 2
60 PRINT TAB(9,4);"DAY
  OF THE WEEK";TAB(6
  ,6)"For the ACORN ELECT
  RON";TAB(6,8);"(c)
  ELECTRON USER 1983"
70 COLOUR 128
80 PRINT TAB(0,12);"Please
  enter:"
90 PRINT TAB(0,15);
  :INPUT "Date "D
100 PRINT TAB(0,17);
  :INPUT "Month "M
110 PRINT TAB(0,19);
  :INPUT "Year "Y
120 IF M=0 AND D=0
  AND Y=0
  THEN END
130 IF M<=2
  THEN M=M+12
  :Y=Y-1
140 N=D+2*M+INT (.6*(M+1))+
  Y+INT (Y/4)-INT (Y/100)
  +INT (Y/400)+2
150 N=INT ((N/7-INT (N/7))*
  7+.5)
160 PRINT ""The day is
  ";
  :COLOUR 7
  :PRINT ;DAY$(N)
170 G=GET
180 UNTIL 0
190 DEF PROCinit
200 DIM DAY$(6)
210 FOR N=0 TO 6
220 READ DAY$(N)
230 NEXT N
240 ENDPROC
250 DATA Saturday,Sunday
  ,Monday,Tuesday,Wednesd
  ay,Thursday,Friday
  
```


Casting Agency


CENTRAL
CASTING
AUDITIONS
TODAY

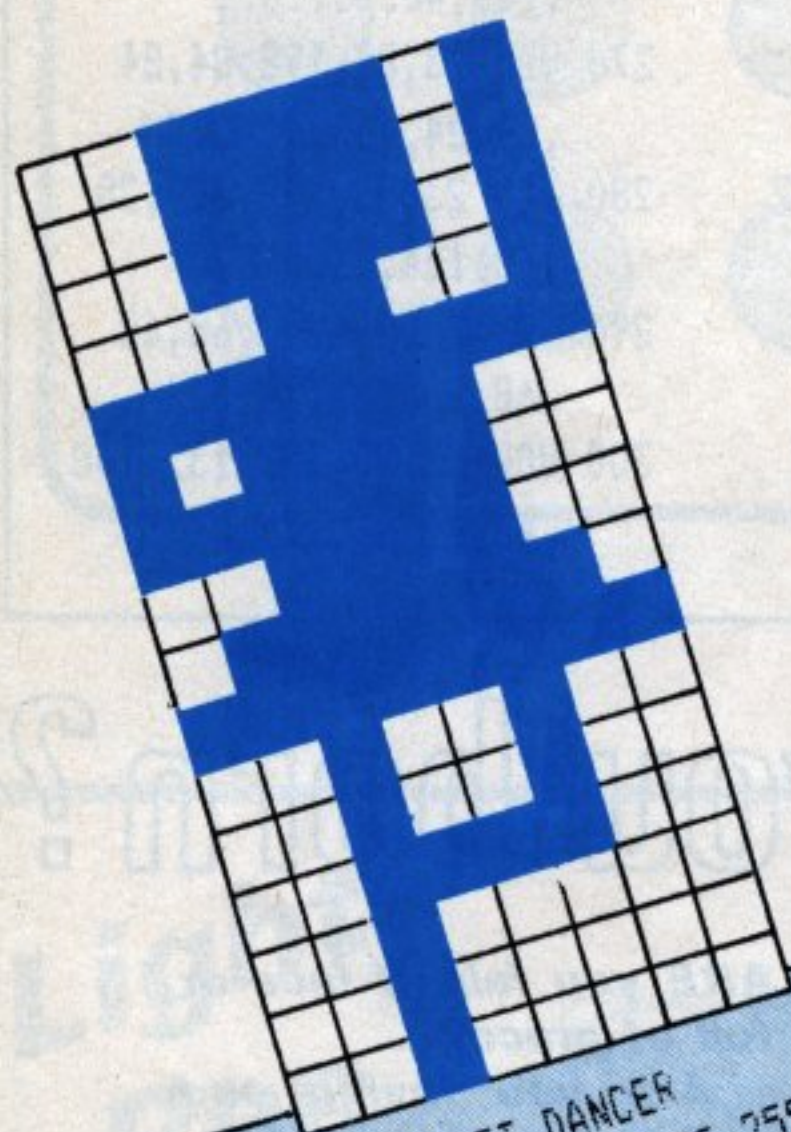


BALLET DANCER
VDU23.224.61.61.61.25.255.188.
252.60
VDU23.225.126.255.36.36.60.32.
32.32

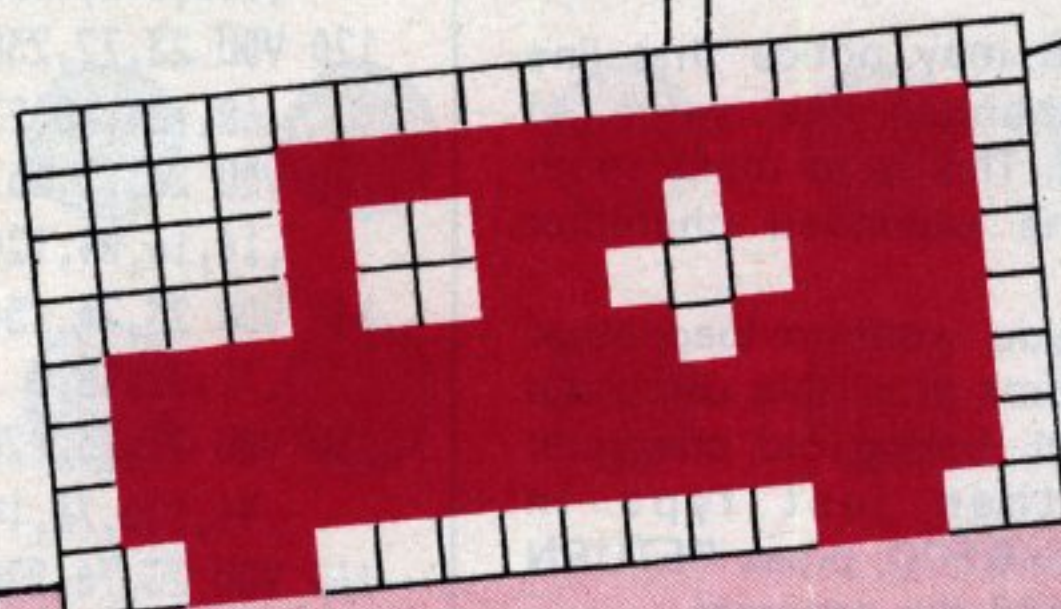


AMBULANCE
VDU23.233.0.15.9.9.127.127.127.48
VDU23.234.0.254.222.142.222.254.254.12

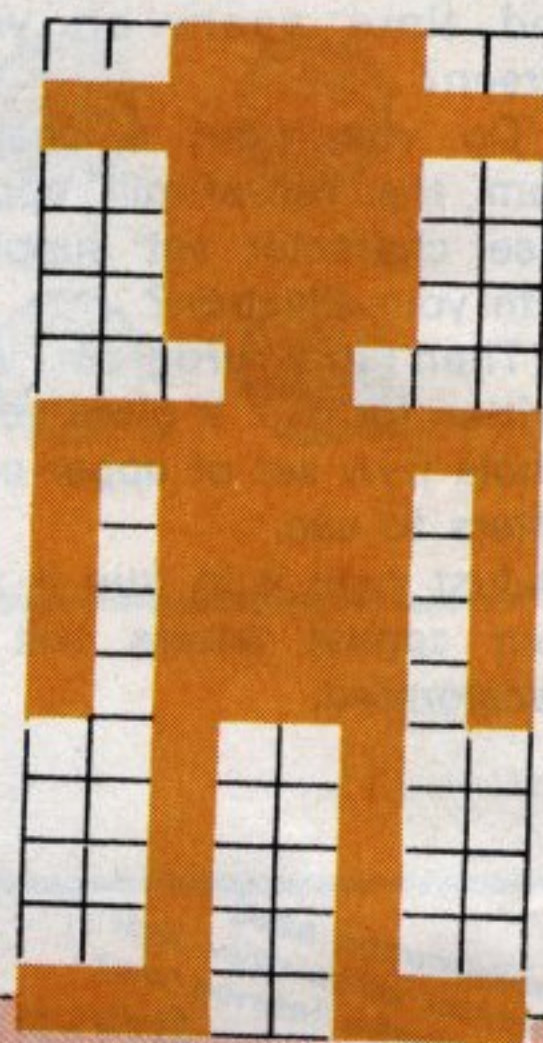


MAN WITH HAT
VDU23.228.60.255.60.60.60.24.2
55.189
VDU23.229.189.189.189.36.36.36
.36.231

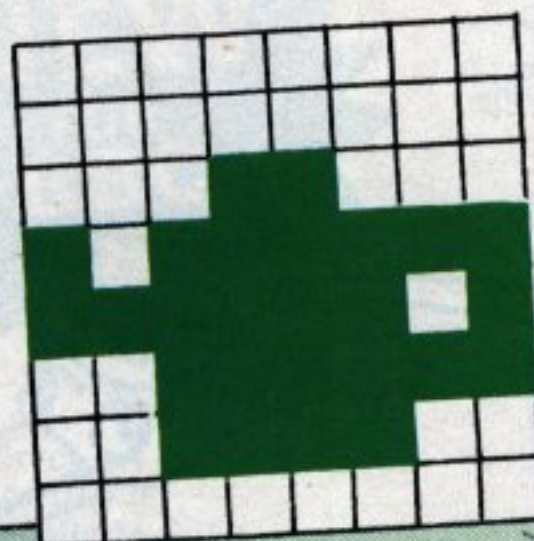

TEAPOT
VDU23.230.0.0.24.191.253.63.60
.0

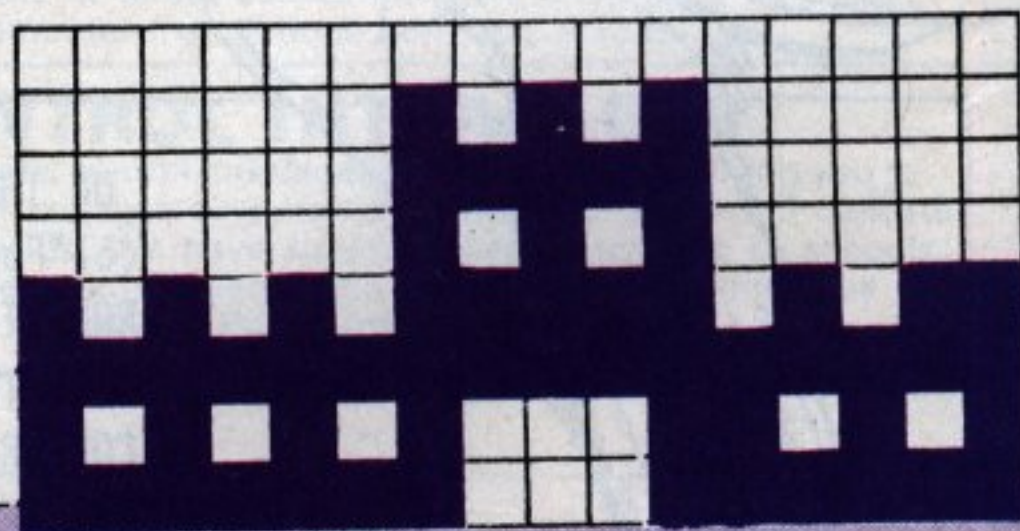

CASTLE
VDU23.231.0.2.3.2.171.255.170.254
VDU23.232.0.160.224.160.235.255.53.63

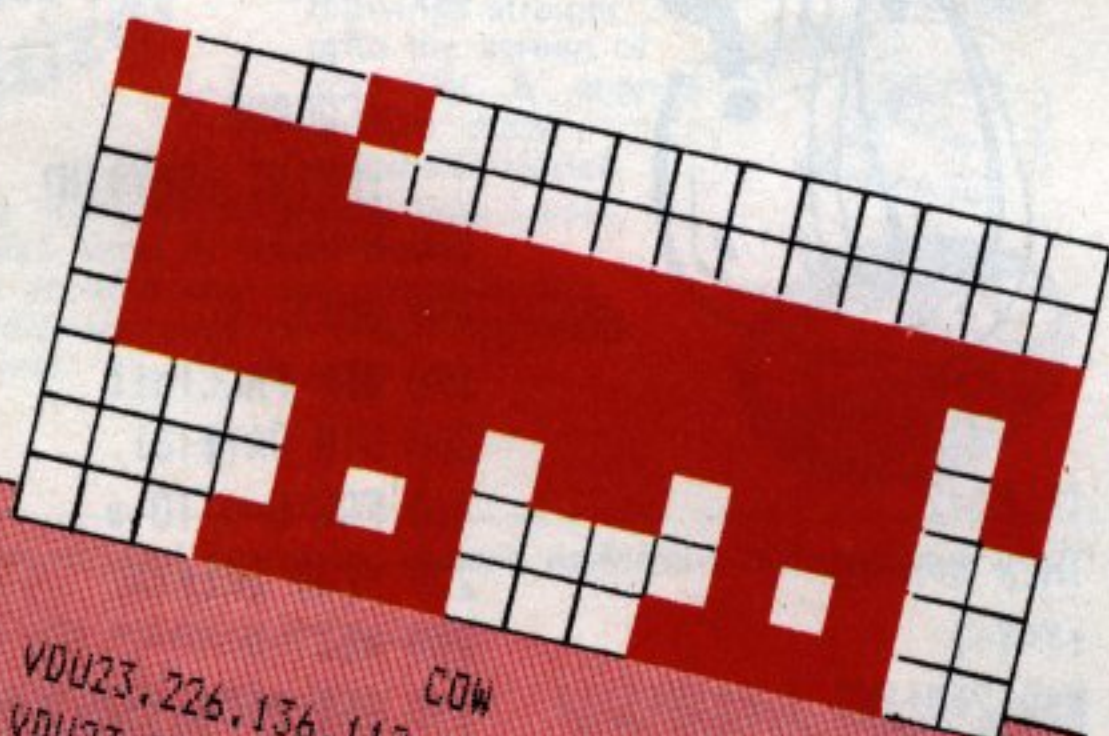

COW
VDU23.226.136.112.127.127.127.14.10.30
VDU23.227.0.0.255.253.253.220.20.60

THIS is the start of the unique *Electron User Shape Dictionary* – an essential source of off-the-shelf user-defined characters which you can incorporate into your own programs.

Over the next few months it will build up into a comprehensive collection that no *Electron* programmer will want to be without.




```

10 MODE 2
20 VDU 23:8202:0:0:0:
30 PROCDEFINE
40 CLS
   :COLOUR 14
   :PROCBALLET(9.15)

```

```

50 PROCPAUSE
60 CLS
   :COLOUR 3
   :PROCCOW(9.15)
70 PROCPAUSE
80 CLS
   :COLOUR 7
   :PROCMAN(9.15)
90 PROCPAUSE

```

```

100 CLS
    :COLOUR 2
    :PROCTEAPOT(9.15)
110 PROCPAUSE
120 CLS
    :COLOUR 1
    :PROCCASTLE(9.15)
130 PROCPAUSE
140 CLS
    :COLOUR 5
    :PROCAMBULANCE(9.15)
150 PROCPAUSE
160 GOTO 40
170

```

```

180 DEF PROCDEFINE
190 VDU 23,224,61,61,61
    .25,255,188,252,60
200 VDU 23,225,126,255,36
    .36,60,32,32,32
210 VDU 23,226,136,112,127
    .127,127,14,10,30
220 VDU 23,227,0,0,255,253
    .253,220,20,60
230 VDU 23,228,60,255,60
    .60,60,24,255,189
240 VDU 23,229,189,189,189
    .36,36,36,36,231
250 VDU 23,230,0,0,24,191
    .253,63,60,0
260 VDU 23,231,0,2,3,2,171
    .255,170,254
270 VDU 23,232,0,160,224
    .160,235,255,53,63
280 VDU 23,233,0,15,9,9
    .127,127,127,48
290 VDU 23,234,0,254,222
    .142,222,254,254,12
300 ENDPROC
310
320 DEF PROCBALLET(X%,Y%)
330 VDU 31,X%,Y%,224,31
    ,X%,Y%+1,225


```

```

340 ENDPROC
350
360 DEF PROCCOW(X%,Y%)
370 VDU 31,X%,Y%,226,31
    ,X%+1,Y%,227
380 ENDPROC
390
400 DEF PROCMAN(X%,Y%)
410 VDU 31,X%,Y%,228,31
    ,X%,Y%+1,229
420 ENDPROC
430
440 DEF PROCTEAPOT(X%,Y%)
450 VDU 31,X%,Y%,230
460 ENDPROC
470
480 DEF PROCCASTLE(X%,Y%)
490 VDU 31,X%,Y%,231,31
    ,X%+1,Y%,232
500 ENDPROC
510
520 DEF PROCAMBULANCE(X%
    ,Y%)
530 VDU 31,X%,Y%,233,31
    ,X%+1,Y%,234
540 ENDPROC
550
560 DEF PROCPAUSE
570 A$=INKEY$ (500)
580 ENDPROC

```

**Bring these handy
characters to life in
your own Electron
programs with these
ready-to-go listings.
And there'll be more
next month!**

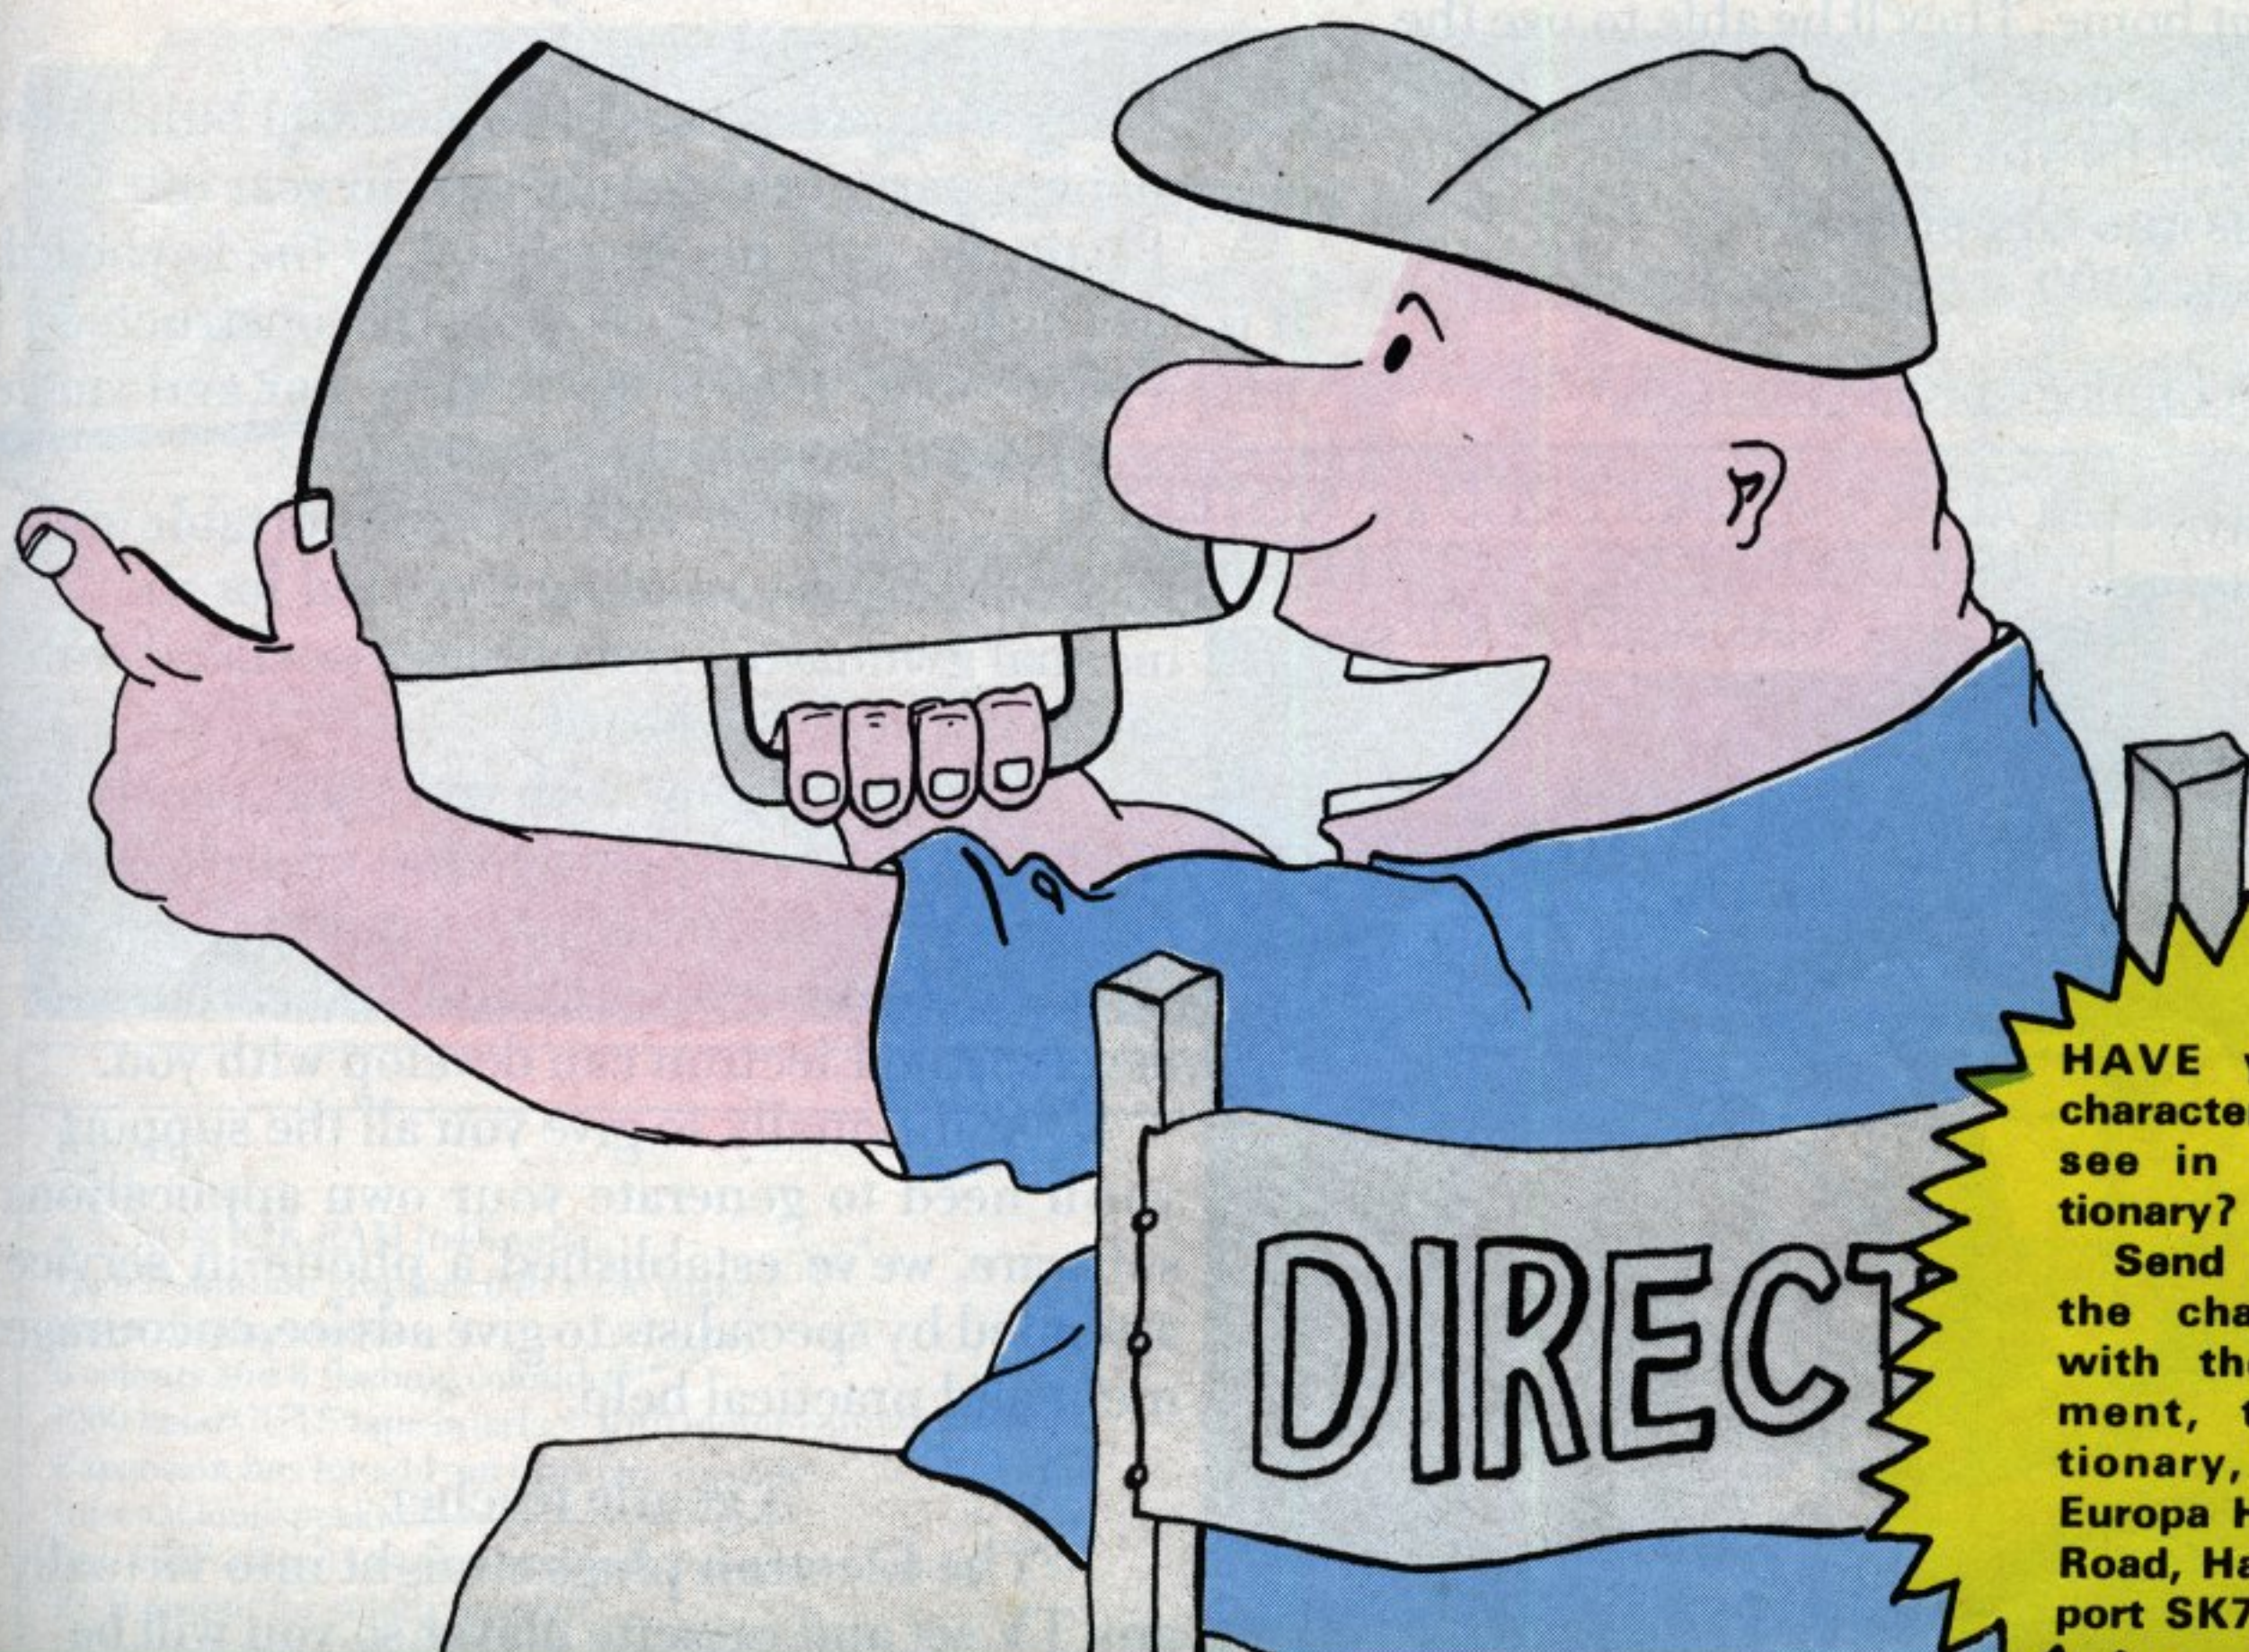

HAVE you a favourite character you would like to see in our Shape Dictionary?

Send your drawing of the character, together with the VDU23 statement, to: Shape Dictionary, Electron User, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

The new Electron from Acorn. Ask any child at school why it's worth £199.

Most British children have one thing in common with the new Electron microcomputer: they speak the same language.

You see, the Electron is the first micro, remotely in this price range to use BBC Basic, the computer language that is rapidly becoming the standard in British schools.

But that's not all. Most children will feel at home with the Electron as soon as they lay hands on it.

This is because it has developed out of the Micro that has been chosen by over 80% of schools participating in the Government's current Micros In Schools project. It has a similar keyboard and has most of the functions of this much acclaimed (but naturally, more expensive) machine.

So now children will be able to continue their computer studies at home. They'll be able to use the same educational programs they use at school. And, if asked nicely, they'll be able to help willing adults take their first steps into computing.

All this for only £199.

A micro technology break-through.

And now a few reasons for adults why

NOW YOU'VE MASTERED MONSTERS,
WE COULD MOVE ON TO MONEY
MANAGEMENT.



the Electron is such an exceptional machine at the price.

The Electron is neat and compact. Yet it is fast and powerful. (Full details, for the technically minded, are in the box opposite.)

It produces high quality sound using its own internal speaker.

And it offers a range of facilities many larger more expensive machines just cannot match.

For example the Electron's colour graphics have the highest resolution of any home computer.

This is because the chip that controls the graphics, specially designed by Acorn, is one of the most advanced of its kind. As a result, the Electron delivers twice as many characters across the screen as its closest competitor.

Built to last and to grow.

The Electron has been designed and built to be a permanent part of the family, year in year out.

Particular care has been paid to the keyboard. It is electric typewriter style: robustly constructed with a good, solid 'feel'. It has a space bar, and single entry keys for key commands.


In other words it's comfortable and easy to use, avoiding the need for the manual gymnastics sometimes associated with calculator style keyboards.

And it will grow with you via expansion modules, that Acorn are developing, to take peripheral additions such as printers and disc drives. So as your knowledge, interest and ambitions develop, the Electron can develop with you.

Additionally, to give you all the support you'll need to generate your own applications software, we've established a phone-in service attended by specialists to give advice, encouragement and practical help.

A gentle teacher.

The Electron plugs straight into virtually any TV set and cassette player so you will be

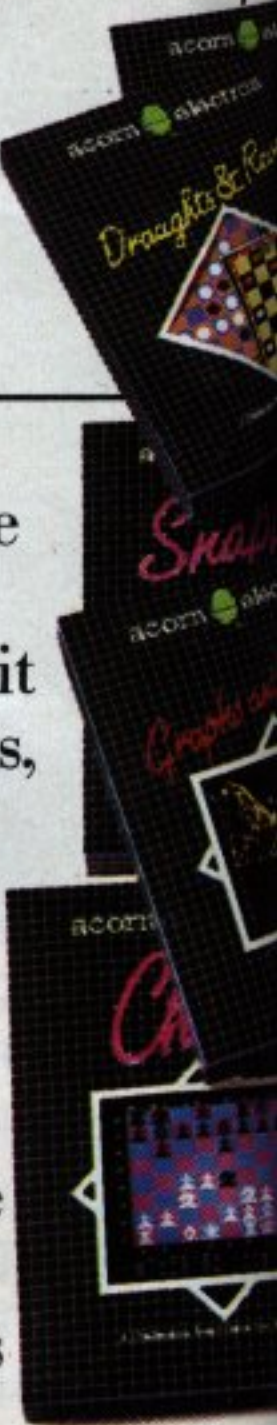

ready to go as soon as you get it home.

It comes not only with a comprehensive user guide, which describes the machine and its functions, but also with a book that takes you step by step through the basic principles of programming.

A free taste of its versatility.

You will also receive an "Introductory" cassette which will put the Electron through its paces showing you a little of what it can do with its 64k of memory (32k ROM, 32k RAM).

The cassette will give you a taste of those exceptional colour graphics we mentioned earlier; of its ability to play and notate music, and show you how it might help in home accounting. It will challenge you to a few games and will, if you ask it, do your whole family's biorhythms in a matter of seconds.

You will in short, through the 15 separate programs it contains, get a glimpse of the Electron's potential. But only a glimpse, for that potential is as limitless as your own interest and imagination.

A widening range of software.

To help you realise some of that potential, Electron software already ranges from "Personal

Money Management" through "Starship Command" to "Creative Graphics" (which, incidentally, includes some spectacular three-dimensional rotating shapes). Naturally, with its strong educational links, educational software will be extremely

EXPERTS LIKE 'WHAT MICRO?'
AND ME RATE THE ELECTRON
HIGHER THAN ANY OF THE
COMPETITION.



important for the Electron and even now O and A Level revision papers are being processed for Electron users.

How to get your Electron.

The Electron is available from selected WHSmith and local Acorn stockists. However, if you would like to order one with your credit card, or if you would like the address of your nearest supplier, just phone 01-200 0200.



Technical Specifications

Hardware.

2MHz 6502.
32K ROM 32K RAM (64K total).
High resolution graphics 640 x 256 max.
Seven display modes.
8 colours and 8 flashing colours.
1200 baud CUTS tape interface with motor control.
Expansion bus for add-on interface modules.
Internal loudspeaker.
PAL UHF output to colour or black and white domestic TV.
RGB output for colour monitor.
56 key full travel QWERTY keyboard with spacebar.

Software.

BBC BASIC.
Extensions include interger, floating point and string variables, multi dimensional arrays: IF... THEN... ELSE, REPEAT... UNTIL, procedures with local variables.
Operating system allows plot, draw and fill commands.
Event timing.
Built-in assembler.
6502 assembly language can be mixed with BASIC.

The Acorn  Electron.

*It doesn't look all that much, but as **MIKE COOK** explains, it is the gold-plated key to your*

EXPANDING electron



HIDING at the back of the Electron, covered by a slip-on plastic protector, is a double sided, gold plated, 50-way edge connector.

No mention of this in the Electron's User Guide, but it is the key to expanding the Electron to include the type of goodies that have made the BBC Micro so popular.

Using this edge connector you can link up circuits that add a printer port, analogue, digital and serial ports, sideways ROMs and disc interface, as well as all the bolt-on goodies that will be developed in the future for the Electron or the BBC Micro.

The table shows the signals that come out of the edge connector.

These are for issue 1 boards, but should stay the same for all issues.

The key shown in place of contact 15 is a slot that prevents the edge connector being placed on the wrong way round.

When the microprocessor wants to access a memory location, it sets the R/W line to a logic one (if it is going to read it) or a logic zero (if it is going to write to it).

The address of the memory location to be used is placed on the 16 lines of the address bus.

These are labelled A0 to A15 and will contain a combination of logic ones and zeroes corresponding to the address required.

This gives a maximum of 65,536 different combinations or addresses and is the maximum amount of memory that the microprocessor can directly access.

In computer terms this is known as 64k, because 1k is a "baker's dozen" thousand – that is, 1024.

When a memory device detects an address on the address bus which corresponds to it, the memory device places the contents of that memory on the data bus.

This is a set of eight wires labelled D0 to D7 but, unlike the address bus, it is bi-directional.

This means it can be an input or an output depending upon whether the microprocessor is reading or writing to a memory location.

There are two signals that can make the microprocessor break off from the program it is executing and, in effect, call a subroutine.

These are known as interrupts, and the two are the NMI (none maskable interrupt) and the IRQ (interrupt request).

In order to synchronise the transfer of data from memory, three clock signals are available.

These are the 16 MHz clock, the 1 MHz clock and the microprocessor's ϕ_0 clock.

The other connections are for the power. One set is for power into the Electron so that a bolt-on device can have

a built-in mains transformer of greater capacity than the Electron's plug adaptor.

This still allows the power regulator in the Electron to be utilised.

The regulated power from the Electron is also available on the edge connector to power the bolt-on devices.

The final connection is the audio input/output and may be used by speech synthesisers or high power amplifiers.

It should be noted that the range of address bus signals available on the Electron edge connector is greater than is available on the BBC Micro with its collection of connectors and sockets.

By careful design of add-on circuitry it will be possible to upgrade the Electron to include all the bells and whistles of its big brother.

This gold plated connector is indeed the key to the Electron's expansion.

ELECTRON EDGE CONNECTOR

Component side function	Pin No.	Wiring side function
18v AC in	1	18v AC in
18v AC return	2	18v AC return
-5v	3	-5v
0v	4	0v
+5v	5	+5v
Audio in/out	6	16 MHz clock
1 MHz clock	7	ϕ_0 microprocessor clock
Reset	8	NMI
IRQ	9	R/W
D7	10	D6
D5	11	D4
D3	12	D2
D1	13	D0
not connected	14	not connected
KEY		
A15	16	A14
A13	17	A12
A11	18	A13
A10	19	A0
A1	20	A2
A3	21	A4
A5	22	A6
A7	23	A8
0v	24	0v
+5v	25	+5v

SOUNDS..



Exciting



WAILING BUGS

ENVELOPE 4,4,-1,1,0,20,20,0,126,0,0,-126,126,126
SOUND1,4,200,100

POLICE SIREN



ENVELOPE 1,1,-7,7,0,10,10,0,126,0,0,-126,126,126
SOUND 1,1,136,50

BUILD up a library of exciting sounds to enhance your own programs with these listings. And watch out for more next month!



UP, UP AND AWAY

ENVELOPE 2,1,1,0,0,200,0,0,126,0,0,-126,126,126
SOUND1,2,0,40




CRAZY MACHINERY

ENVELOPE 5,1,70,6,0,31,10,0,126,0,0,-126,126,126
SOUND1,5,100,200



SCORE A HIT

ENVELOPE 3,4,90,-15,-15,10,20,20,126,0,0,-126,126,126
SOUND1,3,100,20

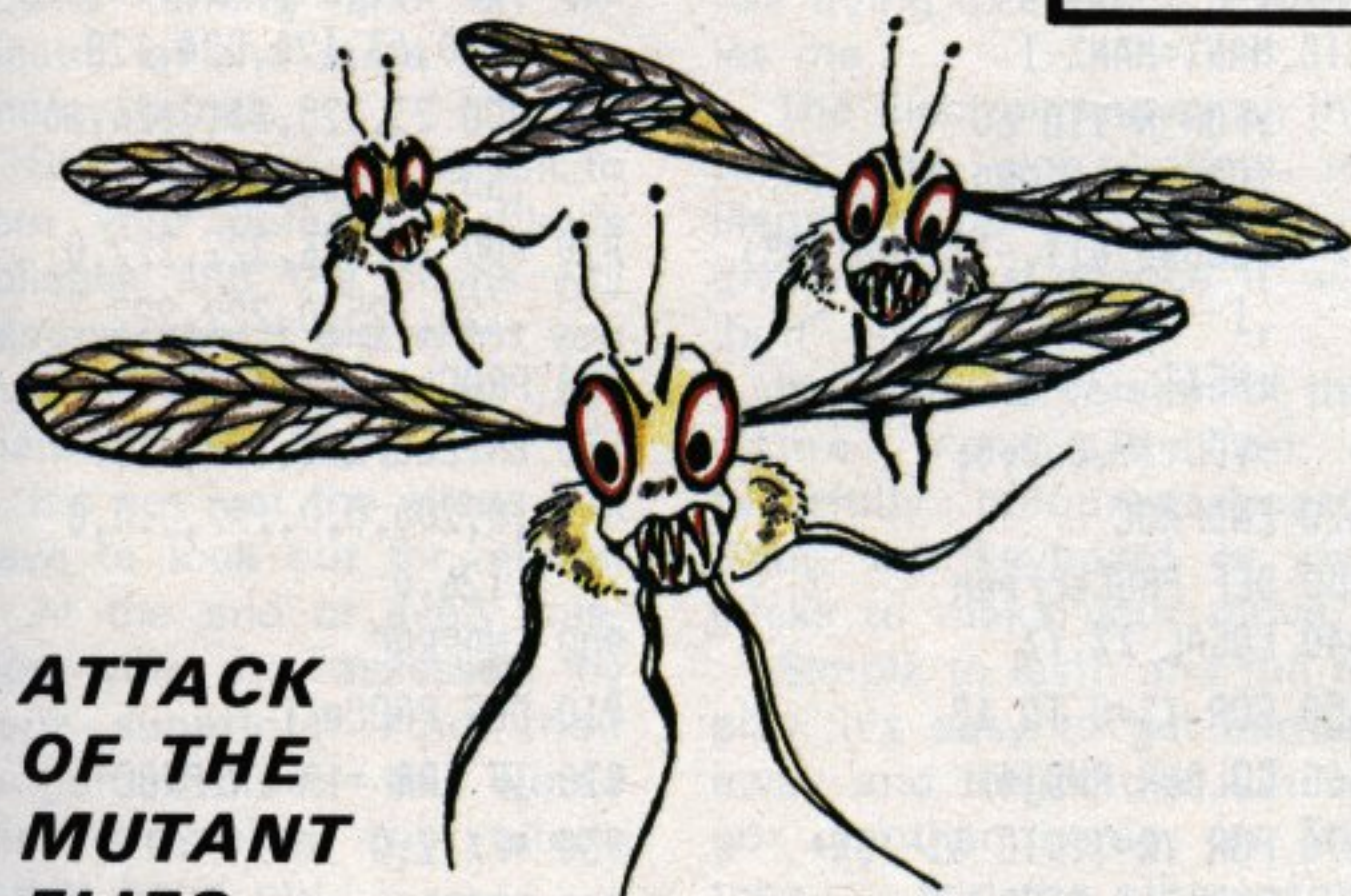

ATTACK OF THE MUTANT FLIES

ENVELOPE 6,1,36,-36,0,20,20,0,126,0,0,-126,126,126
SOUND1,6,160,100

YOU are the bomb-aimer of a B17 flying over an enemy city.

Your mission is to drop bombs on the buildings below and obliterate them completely.

The trouble is, it takes more than one bomb run over the target to achieve this and on each successive run you get lower. Get too low and you crash!


It's up to you. Destroy the city before you become an involuntary kamikaze pilot.

The A key will make you go slower, the S key speeds you up.

Press the Return key and it's bombs away. Good luck!

BOMBER

STRIKE

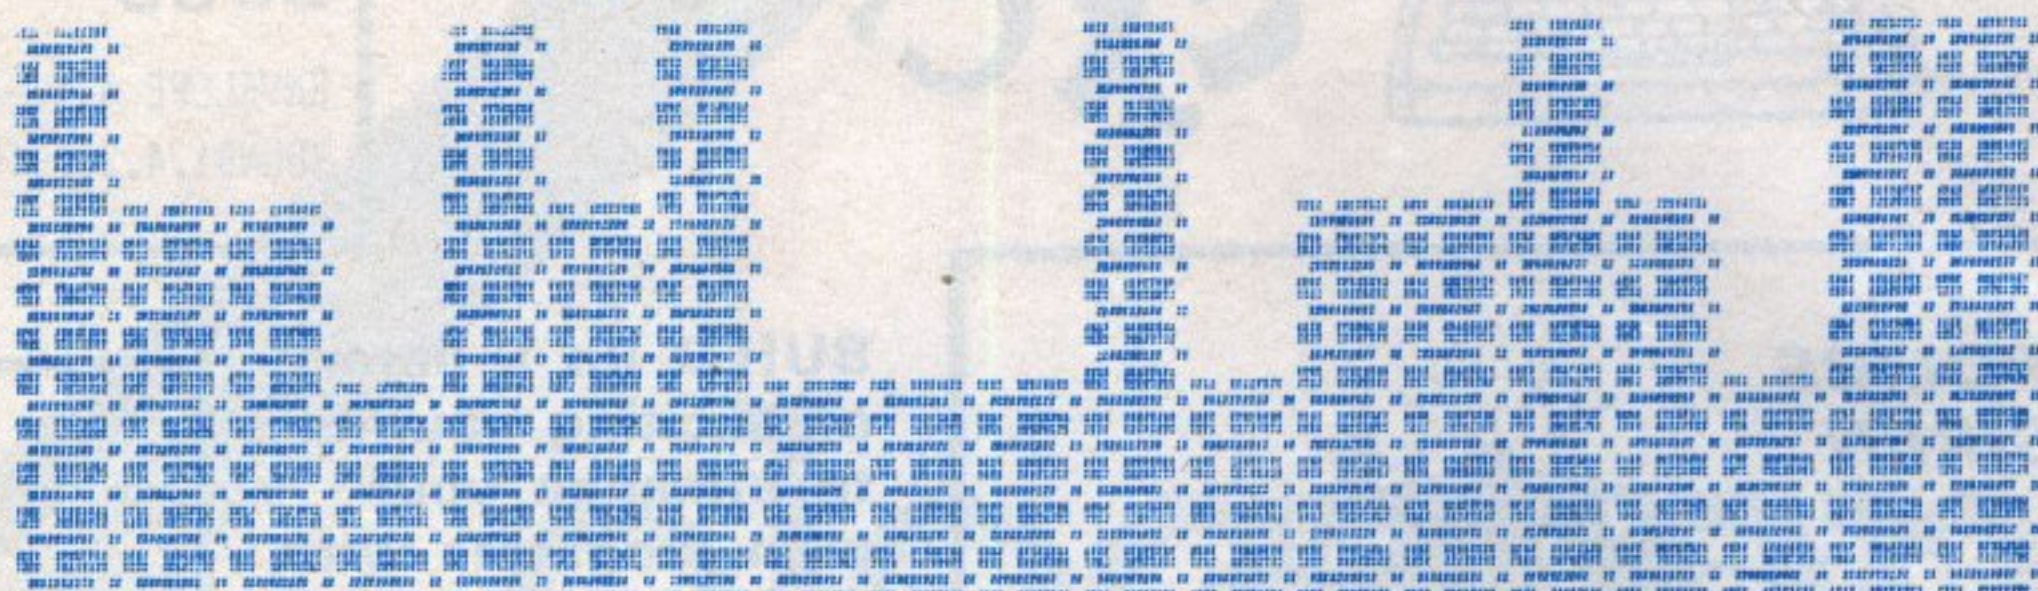

```

10 REM BOMBER STRIKE
20 ON ERROR PROCerr
30 REPEAT
40 MODE 6
50 *FX12,0
60 *FX15,1
70 VDU 19,7,3;0;
80 PRINT TAB(12,12)"BOMBER
   STRIKE"
90 PRINT TAB(12,14);"A =
   SLOW";TAB(12,16);"S
   = FAST";TAB(12,18);
   "RETURN = BOMB"
100 REPEAT
110 PRINT TAB(12,20);
   :INPUT "SKILL LEVEL 1/6
   "S%
120 UNTIL S%>0 AND S%<7
130 PROCinit
140 REPEAT
150 MODE 2
160 VDU 23,0,8202;0;0;0;
170 PROCscreen
180 V%=-64
   :X%=0
   :Y%=991
   :Z%=FALSE
190 VDU 5
200 REPEAT
210 PROCfly
220 IF FNP(V%,W%)<>0 Z%=TRUE
230 IF INKEY (-74) AND
   NOT G% PROCdrop
240 IF G% PROCbomb
250 UNTIL Z% OR Y%<64
260 IF Z% PROCdead
270 UNTIL MAN%=0
280 VDU 4
   :PRINT TAB(0,5);"FINAL
   SCORE:";SC%'"ANOTHER
   GAME Y/N"
   :VDU 5

```

```

290 REPEAT G=GET
   :UNTIL G=78 OR G=89
300 IF G=78 PROCend
310 UNTIL FALSE
320 DEF PROCfly
330 X%=X%+C%
   :IF X%>1216 Y%=Y%-32
   :X%=0
340 PROCplane(X%,Y%)
350 K%=INKEY (0)
   :IF K%=-1 ENDPROC
360 IF K%=65 C%=C%-1
   :IF C%<=10 C%=10
370 IF K%=83 C%=C%+1
   :IF C%>=64 C%=64
380 ENDPROC
390 DEF PROCplane(X%,Y%)
400 GCOL 3,2
410 MOVE X%,Y%
   :VDU 224
420 MOVE V%,W%
   :VDU 224
430 V%=X%
   :W%=Y%
440 ENDPROC
450 DEF PROCdrop
460 SOUND &11,1,200,60
470 A%=X%
   :B%=Y%-64
   :G%=TRUE
480 ENDPROC
490 DEF PROCbomb
500 B%=B%-32
   :IF FNP(A%,B%)<>0
   SOUND &11,0,0,0
   :SOUND &10,-15,4,3
   :MOVE D%,E%
   :VDU 225
   :G%=FALSE
   :PROCchole
   :D%=-64
   :ENDPROC

```

```


510 IF B%<32 SOUND &11,0
   ,0,0
   :MOVE D%,E%
   :VDU 225
   :G%=FALSE
   :D%=-64
   :ENDPROC
520 MOVE A%,B%
   :VDU 225
530 MOVE D%,E%
   :VDU 225
540 D%=A%
   :E%=B%
550 ENDPROC
560 DEF PROCchole
570 MOVE A%,B%
   :VDU 9,9,127,127,127
   ,127,9,9,9,9,10,127
   ,127,127,127
580 VDU 4
   :SC%=SC%+20
   :PRINT TAB(11,0);SC%
   :VDU 5
590 ENDPROC
600 DEF PROCdead
610 MAN%=MAN%-1
   :FOR N=1 TO 60
   :VDU 19,0,RND(7);0;
   :SOUND &11,-15,RND(255)
   ,1
   :NEXT
   :VDU 19,0,0;0;
620 ENDPROC
630 DEF PROCscreen
640 LOCAL X%,Y%
650 FOR X%=0 TO 18
660 COLOUR RND(4)
670 FOR Y%=31 TO 31-(S%*
   RND(3)) STEP -1
680 PRINT TAB(X%,Y%);
   :VDU 226;
690 NEXT ,

```

```

700 PRINT TAB(5,0);"SCORE:"
710 ENDPROC
720 DEF FNP(X%,Y%)
730 =POINT(X%+32,Y%)
740 DEF PROCend
750 *FX12,0
760 CLS
770 END
780 DEF PROCinit
790 *FX12,1
800 *FX11,1
810 A%=0
   :B%=0
   :X%=0
   :Y%=991
820 MAN%=3
   :SC%=0
830 C%=32
   :D%=0
   :E%=0
   :V%=-64
   :W%=1023
840 Z%=FALSE
   :G%=FALSE
850 VDU 23,224,128,192,224
   ,120,63,120,224,128
860 VDU 23,225,231,126,60
   ,60,60,60,24,24
870 VDU 23,226,222,222,0
   ,125,125,0,222,222
880 PROCplane(X%,Y%)
890 ENVELOPE 1,128,-1,0
   ,0,200,0,0,127,0,0,0
   ,126,0
900 ENDPROC
910 DEF PROCerr
920 IF ERR =17 ENDPROC
930 *FX12,0
940 REPORT
   :PRINT "IN LINE "ERL
950 VDU 22,7
960 END

```

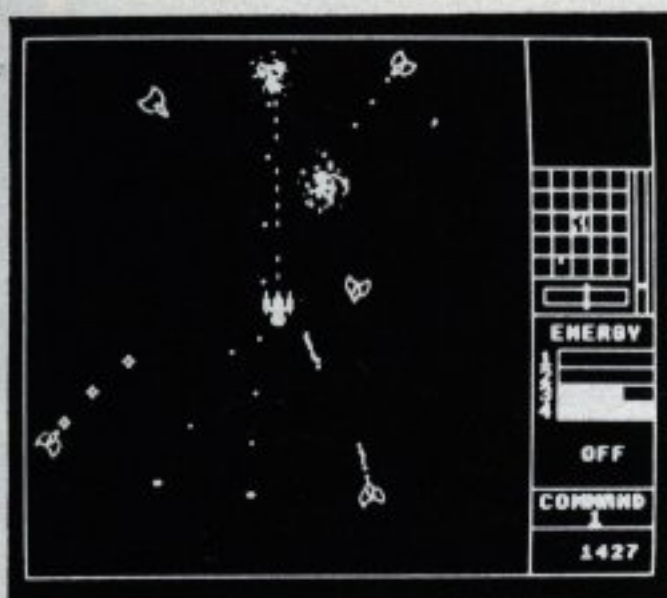Starship Command

(Acornsoft)

SPACE is getting awfully nasty nowadays. It seems to be full of aliens all bent on destroying anyone in their path.

In Starship Command you're in charge of a battle starship with the task of ridding space of these hostile elements.

The only weapons you possess are your torpedoes and your skill. The skill consists of being able to manoeuvre your ship into a position where you can zap the other ships which are coming at you thick and fast.

You've got both short and long range scanners which show the enemies' positions as they approach. The position of your ship and the closer attackers is shown on the main screen.

Your ship stays still in the middle of the display, the other ships appearing to move round it as you turn left and right in order to fire at them.

You've also got a rotation meter to tell you how fast you're turning and an indicator of the state of your energy banks.

Should these banks fall to zero your defensive shields collapse and the aliens will destroy you. I did warn you that it's getting nasty out there.

It's not just the aliens you have to look out for, either.

At the end of every mission you are assessed by your superiors. And their judgement can be worse than anything the aliens might hand out.


Even if you do well, all you are rewarded with are other, harder missions.

I can't say that it's easy,

but all the information you need is there before you on the various scanner displays.

The game seems to have everything. The graphics are superb, the instructions thorough and, once you get used to the way your ship stays still while the aliens move, the whole thing is enthralling.

Peter Gray

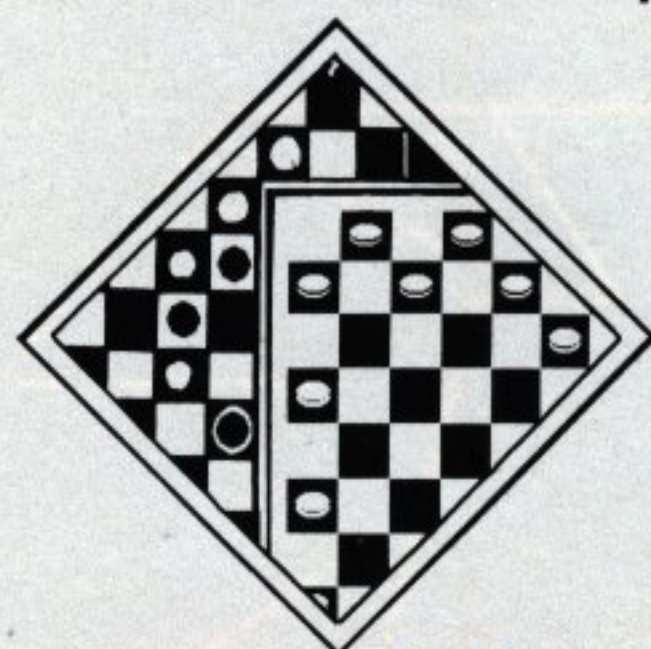

Draughts & Reversi

(Acornsoft)

YOU get two games for the price of one in this package.

The first is Draughts, where you play the Electron at the age-old game or, if you're like me, the Electron plays with you!

You have the choice of eight different levels of play and I can't beat the beast at the easiest level. And it's no use trying to cheat - it won't let me.

The Electron knows all the rules and won't allow an illegal move. In fact, if you give it half a chance it will 'huff' you!

It's a lovely version of the game. You play on a tastefully coloured board, using the keyboard or joysticks to make your move.

Simple to learn and fun to play, it's easy to get carried away and forget that you've got another game on the tape ... and the other game is even better.

Reversi is an old logic game played on an eight by eight grid of squares

between two opponents. Once again, it's you playing the Electron.

The aim is to trap its pieces between two of yours and so turn them into your colour. The winner is the one with the most pieces when no more moves can be made.


It's a classic game, can be learnt in a couple of minutes, but takes a lifetime to master. And your ever-faithful Electron will be there waiting to give you practice.

You have the choice of nine levels of difficulty and can use either the keyboard or joysticks.

The display makes full use of the Electron's graphics and you can even "take back" any moves that you regret.

All in all, it's a great little package. Each game by itself is good value. Together they're a bargain.

Nigel Peters

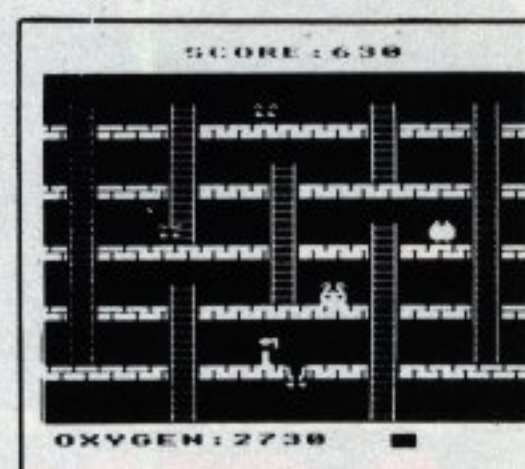

Monsters

(Acornsoft)

IN Monsters the screen becomes a pattern of walls and ladders, along which you, in the guise of a little animated man, are chased by a series of colourful monsters.

You've only got three lives and every time they catch you, you lose a life.

To make things more difficult, while you're dashing along the tops of the walls and running up and down the ladders your oxygen supply is running out.

You have to destroy the


monsters before that happens, and the only way to do this is to dig a hole in a wall, lure the monsters into it and fill it in quickly before they can climb out.

However, as soon as you get rid of one set of monsters they're replaced by another lot of a different colour.

It gets faster and faster and more and more fun. The graphics are excellent and the instructions easy to follow.

It's also compulsive, making you ask for the notorious "one more go". You could say monsters grow on you.

Peter Gray

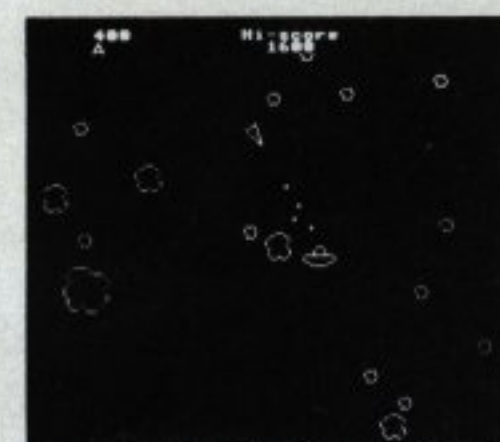

Meteors

(Acornsoft)

DRIFTING alone in space your ship is menaced by a sudden meteor storm. Collision is imminent.

All that you have to fight off the huge rocks are your ship's laser bolts. The trouble is that as soon as you hit them the meteors break up into little pieces which are just as deadly.

You have to blast away at these until they've all been destroyed or they'll destroy you!

Just to make things more difficult, all the firing has attracted the attention of some extremely hostile flying saucers.



These take the opportunity to snipe at you while you're distracted by the meteors, so you've got to shoot at them as well.

You do have thrusters to help you dodge, and if it all gets too much you can escape into hyperspace.

It's great fun, a game of quick thinking and fast reactions. Colourful and fast, space flight will never seem the same again.

Nigel Peters

SENTINEL

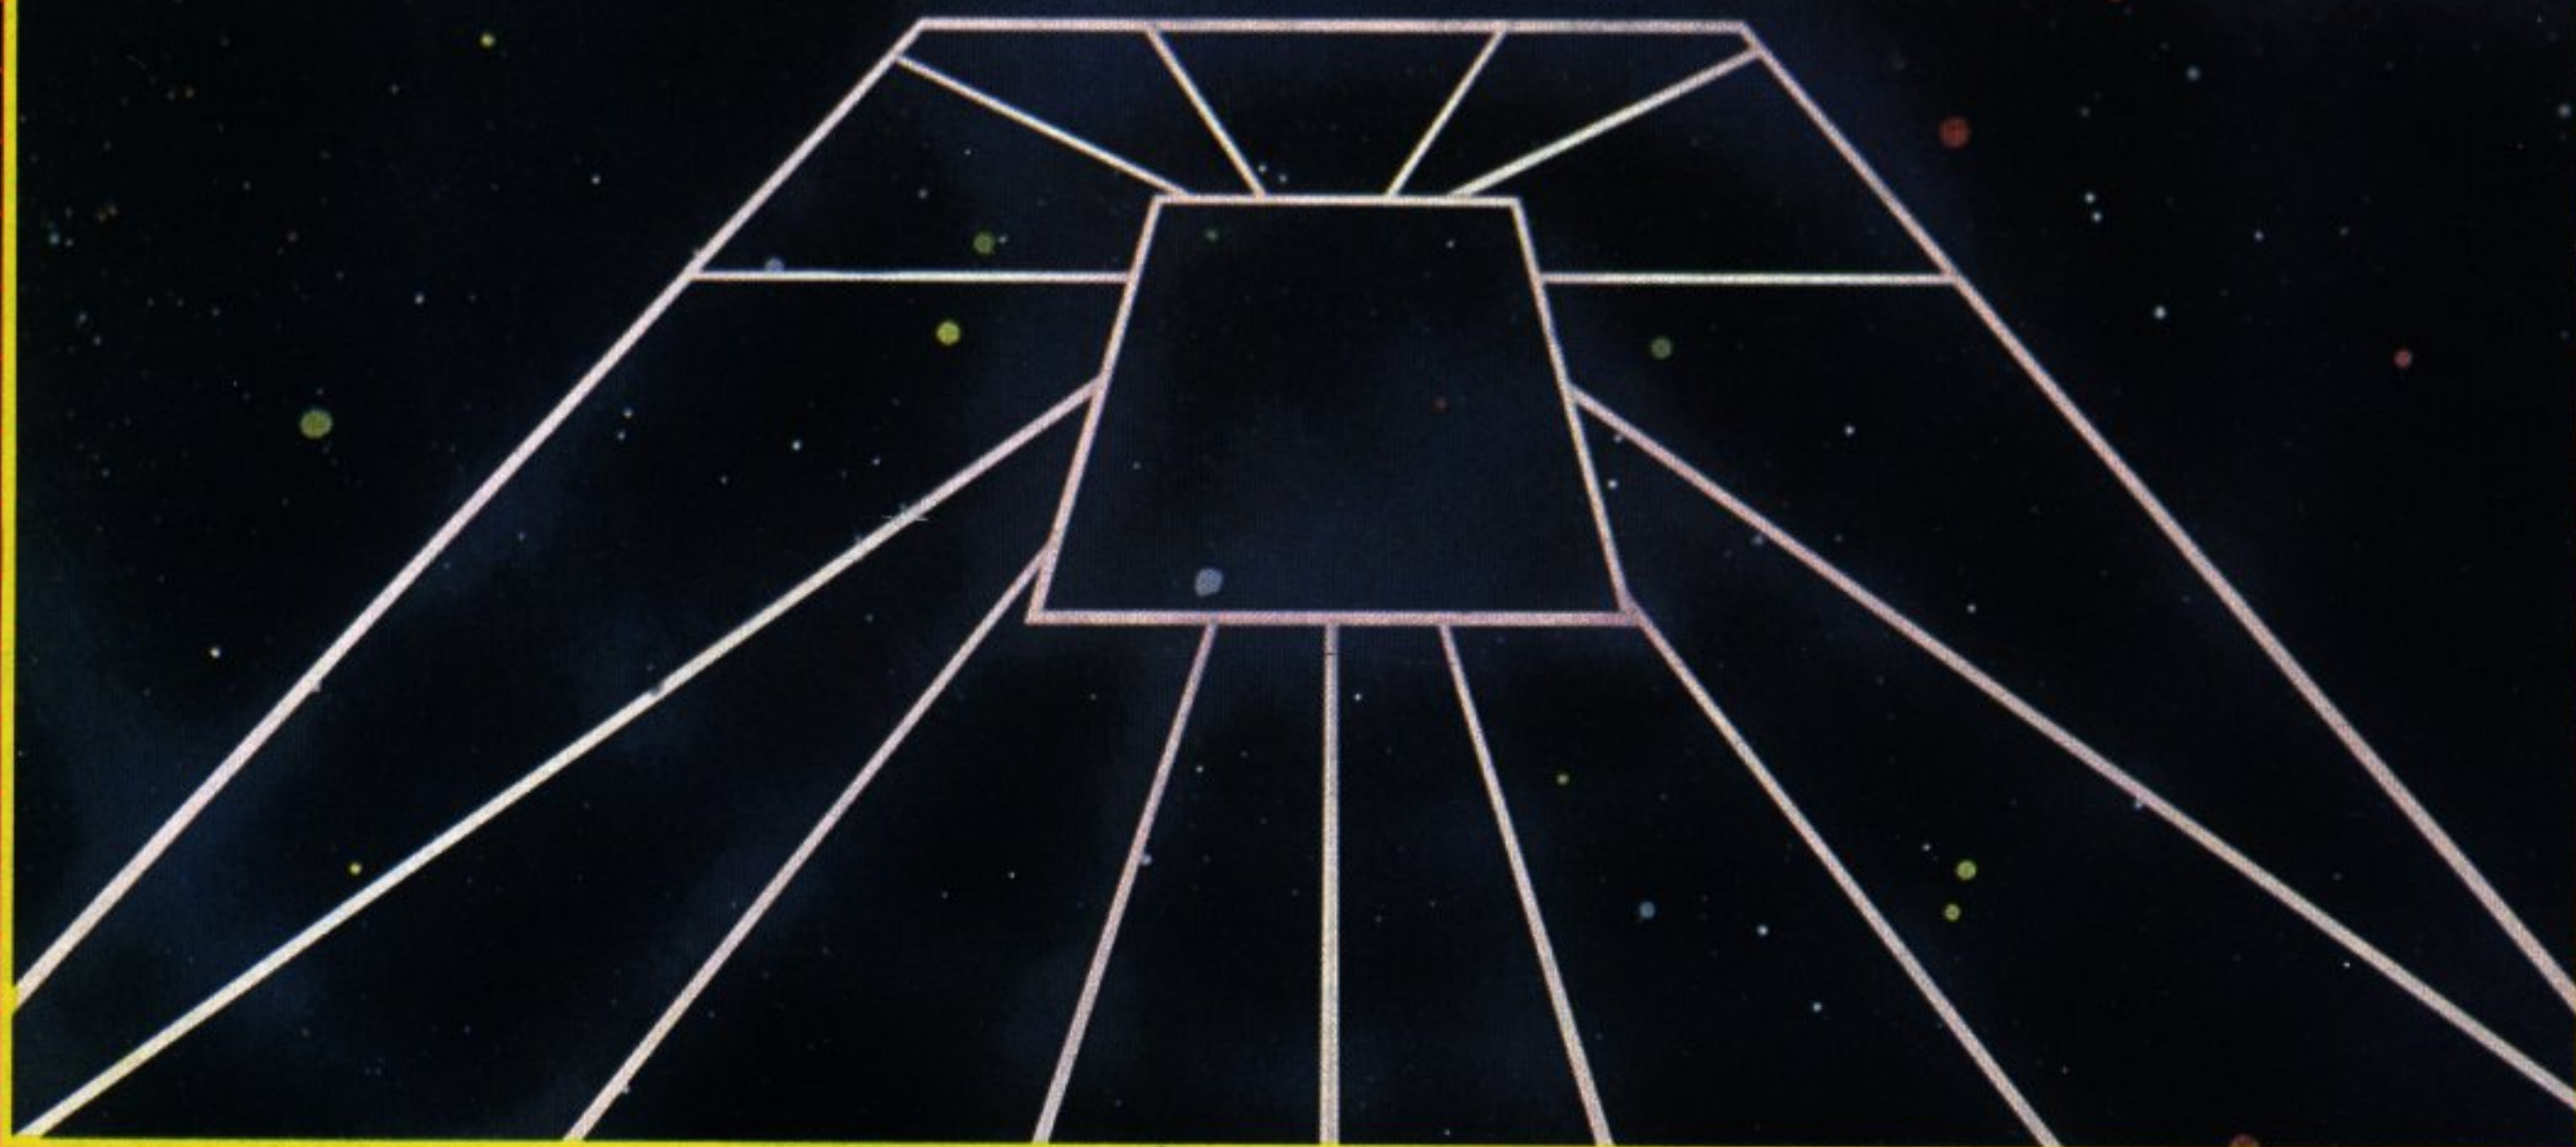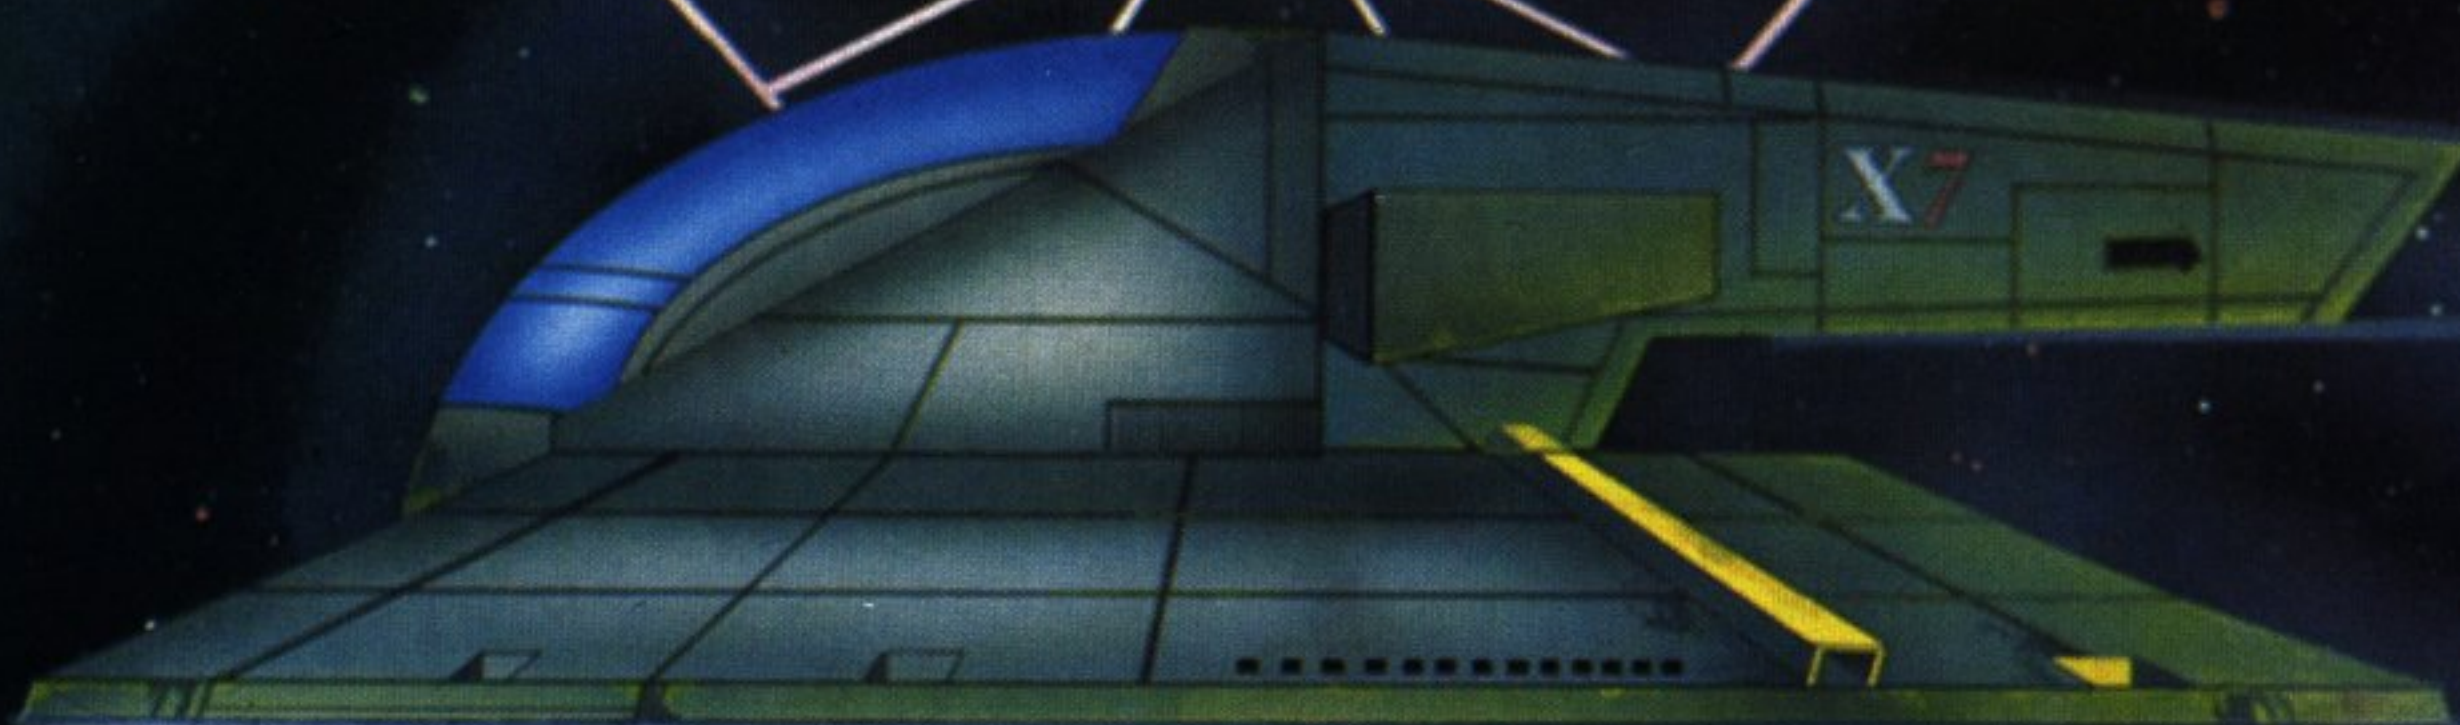

ARCADE ACTION FOR THE BBC MICRO 32K



SENTINEL

In a far quadrant of space are the single dimension gateways to the anti-matter world of Migon.

You must stop the constant bombardment of anti matter plasm bolts and meteors in sectors 1 and 2 and the probe vessel in sector 3.

It will be a constant race as the network of laser walls dissolve and they escape into free space.

6-95

CENTIPEDE

You are caught in a vicious jungle of giant insects. Centipedes are attacking you from all sides. Killer fleas are dropping from the sky, and to top things off there's a venomous spider lurking in the background. You only have your trusty laser cannon as defense.

6-95


INVADERS

A superb example of this truly classic arcade game. Includes all the features of the original and much, much more.

6-95

SEND CHEQUE OR P.O. TO P.S.S. 452 STONEY STANTON RD. COVENTRY CV6 5DG. FOR INSTANT CREDIT CARD SALES TEL (0203)667556, TRADE ENQUIRIES JOHN FLETCHER, (0203) 81346



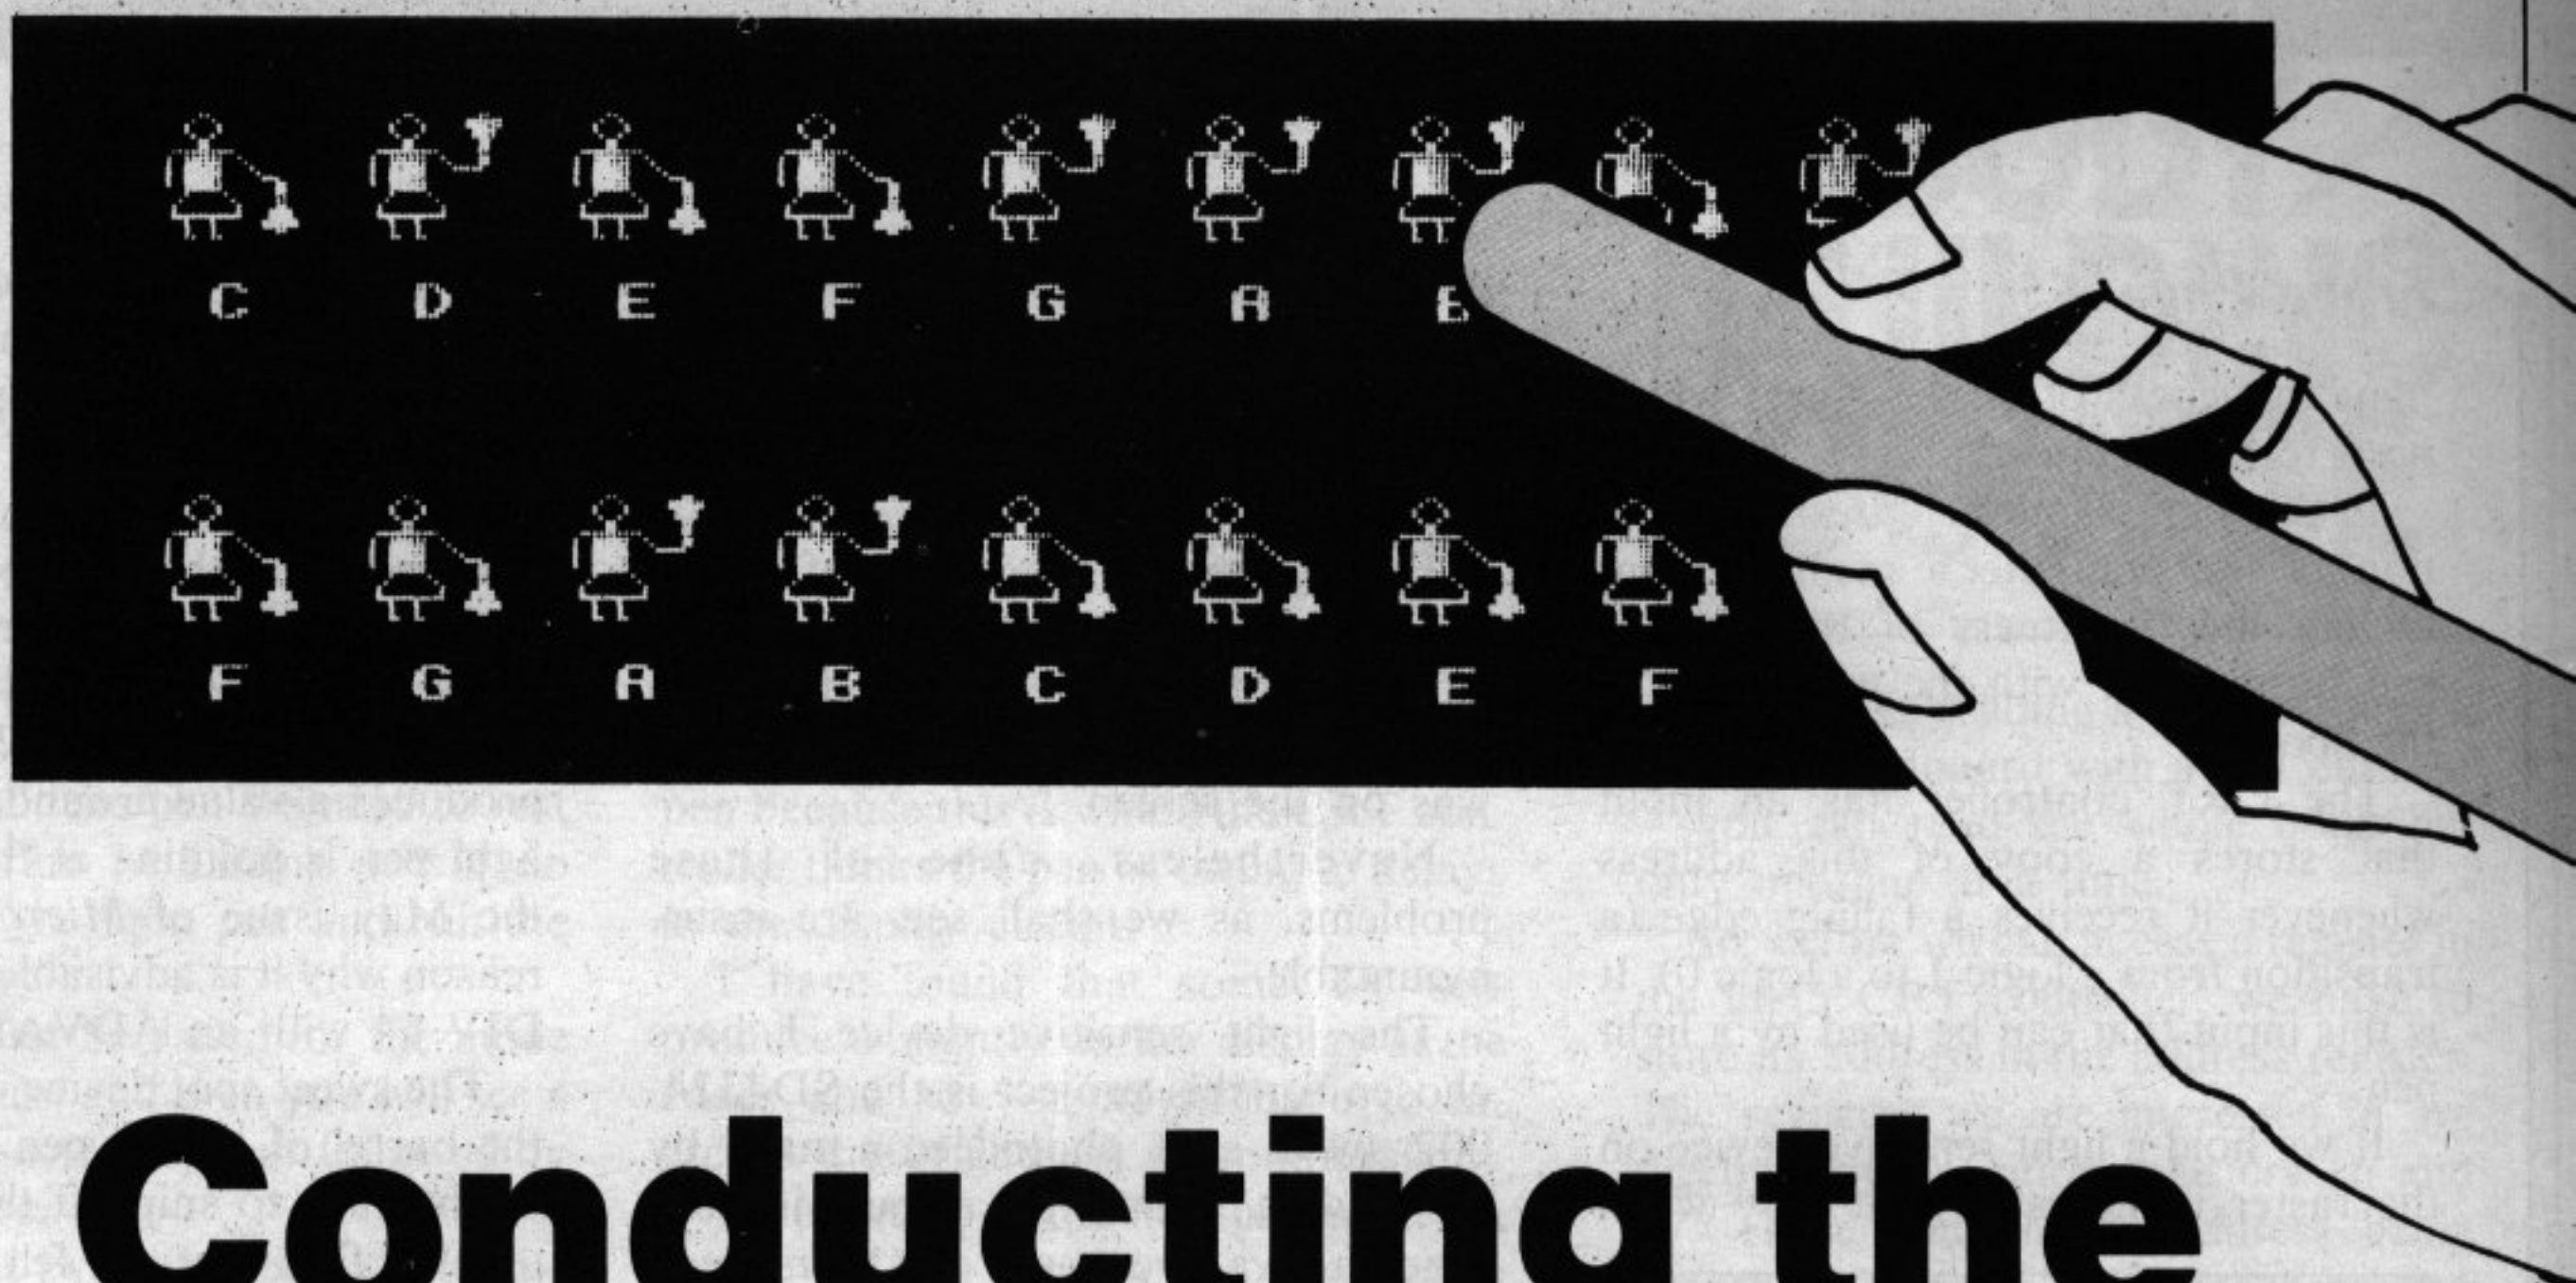

Conducting the light fantastic

THE Editor wandered over to my work bench and picked up this month's project. "Is this it, Mike?" he enquired. "It's not very heavy". "No", I replied, "it's a light pen". After extracting it from my throat I was surprised to find it still worked.

A light pen allows you to interact with the computer without recourse to the keyboard. This is particularly useful if people who are not used to computers are going to use a program.

It avoids them being faced by the daunting sight of a large keyboard with lots of strange symbols. Also, for tasks requiring the indication of positions, a light pen offers a better alternative than entering co-ordinates from the keyboard.

The purpose of a light pen is to feed information from the display screen back to the computer, collecting light from the screen.

Most of the ones available for other computers are no more than light sensors, detecting whether they are pointing to a lit or unlit portion of the screen.

The BBC Micro, however, has built into it a 6845 CRT controller (Cathode Ray Tube — that's posh for TV screen). One of the features of this particular controller is that it allows a light pen to register the exact position it is pointing to on the screen.

Let's first look at how the computer

By MIKE COOK

— or any other picture source — generates a display on a screen.

As you will no doubt be aware, a TV picture is composed of a number of lines. So, for example, we speak of a 625 line TV standard, meaning the

THE BEEB BODY BUILDING COURSE PART 8

display is composed of 625 lines.

The lines are not displayed simultaneously but in sequence. As they are displayed very rapidly persistence of vision results in us perceiving a continuous display. Even so, the TV set is not capable of producing a line as such, but only a single spot.

Again, the illusion of a line is given by moving the spot very rapidly. The

path of the spot is a zigzag, moving from the top to the bottom of the screen (see Figure 1), covering the screen in a raster pattern.

It does this 50 times a second and still manages not to get dizzy. If, in addition to moving the spot, we control its brightness, we can display any pattern of light and shade on the TV display.

When the computer generates a display with a raster scan it must turn the spot on and off at exactly the right time to generate characters and graphics. To do this it must be aware of where the spot is at any time.

This is achieved by sending synchronising pulses to the TV telling it to move the spot to the left hand side (in the case of a line sync pulse) or the top of the display (in the case of a frame sync pulse).

So by using these pulses the computer synchronises the raster on the screen. The computer can determine the X co-ordinate of the spot by the time elapsed since the last line sync pulse.

And by counting the number of line sync pulses given since the last frame sync pulse it knows the Y co-ordinate.

This keeping track of the spot is done by the CRT controller in the BBC Micro. It is a hardware device consisting of a number of counters to deter-



From Page 65

mine the length of all the pulses which need to be generated.

In addition, it must address the portion of the computer's memory containing the brightness of the spot in synchronisation with the movement of the spot.

The CRT controller has an input that stores a copy of this address whenever it receives a falling edge (a transition from a logic 1 to a logic 0). It is this input that can be used by a light pen.

If we hold a light sensitive device on the raster it indicates light only when

SOME early models of the BBC Micro have a small hole in the case for the analogue input port.

This can result in the screws holding the cover on the 15-way D-type plug preventing the plug from being pushed fully home. It can be remedied in two ways:

- **File a larger hole in the plastic case. This is quite easy if all the electronics are removed, as the plastic is quite soft.**
- **Attach the cover of the D-type plug with some adhesive that can be removed if necessary. Suitable adhesives include rubber based (Copydex) types and silicon rubber types such as those used to seal around baths.**

the spot is directly underneath it. So as the spot speeds past it, a pulse is generated.

This pulse is fed into the CRT controller to freeze the address which is being generated at that instant (see Figure II).

The computer program then looks at that address and so works out exactly where the light sensitive device was on the screen.

In practice, things are not as simple as that (they seldom are!). For a start, the spot is moving very fast and the light sensitive device needs to be able to respond equally quickly.

Even when this is achieved, there will be delays between the generation of the spot and its display, so the address captured is displaced by a constant factor.

The brightness of the spot ensures that it causes a pulse as it passes on

more than one line. Also, the address generated by the CRT controller is not immediately useful, as its interpretation depends upon the graphics mode being used.

Finally, there is no way of telling from the CRT controller when the captured address was last updated, so you only know the last place the device was on the screen.

Nevertheless, none of these problems, as we shall see, are insurmountable.

The light sensitive device I have chosen for this project is the SD4324-002 sweet spot photodetector made by Honeywell. This has a built-in lens (known as a sweet spot due to its small spherical shape), amplifier and Schmitt trigger.

This last term might need a little explaining. The Schmitt trigger is an amplifier that produces a digital output (0 or 1) depending on whether the voltage on its input is above or below a threshold level. It is used to clean up the edges of slow or noisy signals.

Its main characteristic is that it exhibits hysteresis. In other words, the threshold level for a positive transition is different from that for a negative transition.

This prevents a slow, noisy edge from producing oscillation around the threshold point (see Figure III).

In our light pen the inclusion of this circuit ensures there is never an intermediate output level produced by just missing the spot.

As all these functions are crowded into one device, the circuit of the light pen is very much simplified. Indeed, you could construct a light pen using just this and a wire and plug for the analogue input port.

However, as mentioned earlier, this would be unable to detect when the screen was being pointed at. To do this we need to add a little more circuitry. The full circuit of the light pen is shown in Figure IV.

The sweet spot device generates pulses when the raster spot flies past it. These pulses are fed into the CRT controller via pin 9 of the analogue input port connector. The same pulses are also used to charge a capacitor.

The diode is included to ensure that the only discharge path for the capacitor is the resistor R3. The voltage on the capacitor is fed into the A/D converter on channel one.

If the light pen is not pointing at the screen only a very small voltage is present. Also, if the light pen is pointing at a bright light or out of the window, a large voltage is present.

Only when the pen is pointing at a display do the pulses produce a mid-range value. I find that the instruction:

ADVAL(1) DIV 64

produces a value around 300 when the light pen is pointing at the screen. (See the May issue of *Micro User* for the reason why it is advisable always to use DIV 64 with an ADVAL instruction).

The sweet spot device can be fitted in the barrel of an old pen, although you might have to snip off the tag to get it to fit. I find that old felt tip pens used for overhead projector transparencies are ideal.

A small hole should be drilled in the end to allow the wire to come out. I used sub-miniature twin-cored screened cable.

The other components can be mounted on the back of the 15 way D-type plug as the plastic shroud gives enough room. This calls for a little care

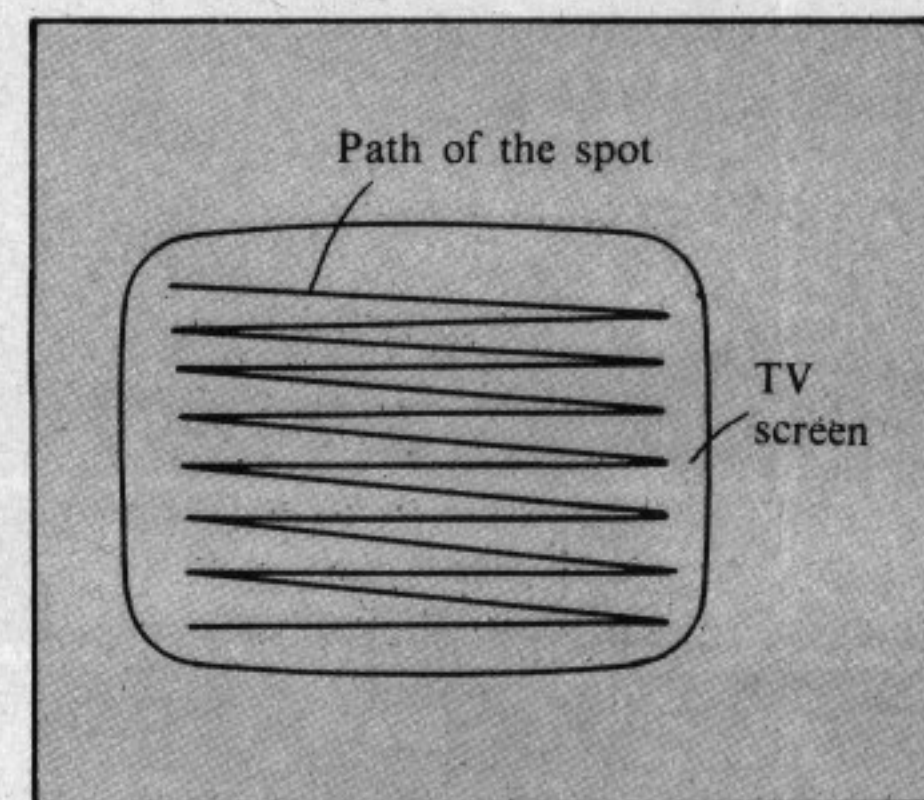


Figure 1: The zizag path of the spot tracing a raster

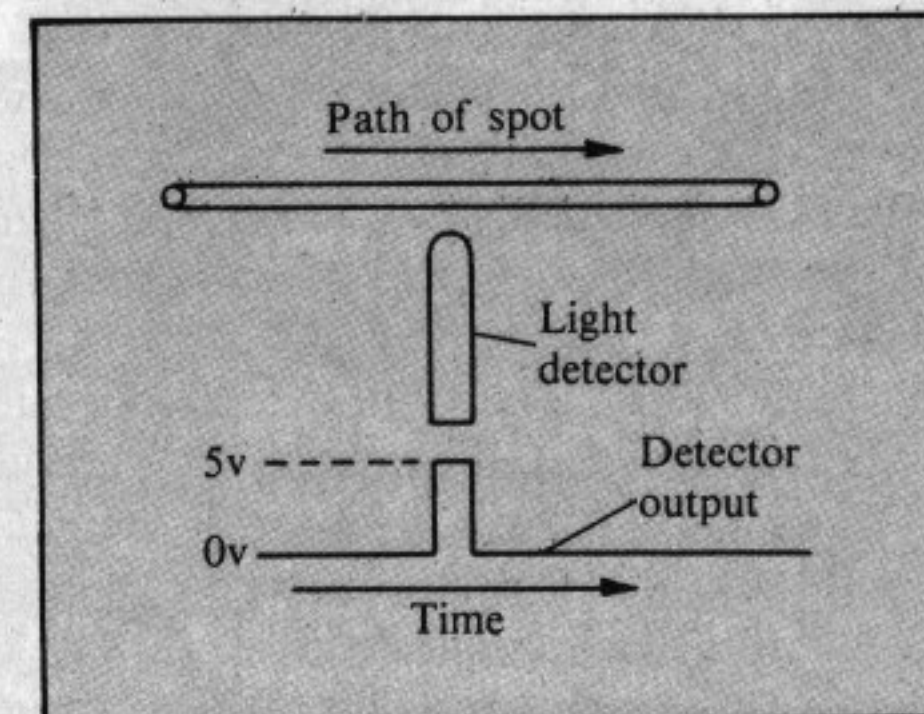


Figure 2: The pulse produced by the light detector as the spot passes it



THE BEEB BODY BUILDING COURSE

in construction, keeping all the component leads as short as possible.

Figure V shows the way the components are arranged. Make sure the capacitor and diode are the right way round or it will not work, although no damage will result if they are wrong. Sorry, no showers of sparks and loud explosions this time.

Having built the pen we need to test it. The program in Listing 1 will do that. Plug in the light pen and run the program.

You will first be asked for the mode you want to use and then you will see a series of characters appear followed by three numbers.

The first two numbers are the address which was being generated by the CRT controller when the spot passed under the light pen, and the third is the ADVAL value indicating whether the light pen is pointing at the screen.

As you point the light pen at the screen you will see all three numbers change as well as the cursor appearing to the right of where you are pointing.

If nothing happens, then try increasing the brightness on your display.

If a plastic visor is fitted in front of the screen this may have to be removed so that the pen can be brought into closer contact with the screen.

If you still have no luck, check your construction thoroughly. The position of the cursor is displaced from the light pen because this is where the CRT controller thinks the pen is, owing to delays in the display circuit.

I have found that some TV sets produce a slightly darker display at the edges and so you might have to increase the brightness to compensate.

By pointing to the first character on the screen you can find the offset value that we will use later on. This will be different in some modes and could be different on other TV displays.

The CRT controller consists of 18 registers, but only occupies two places in the computer's memory.

To do this trick it uses one memory location (&FE00) to decide which register shall appear at the other memory location (&FE01).

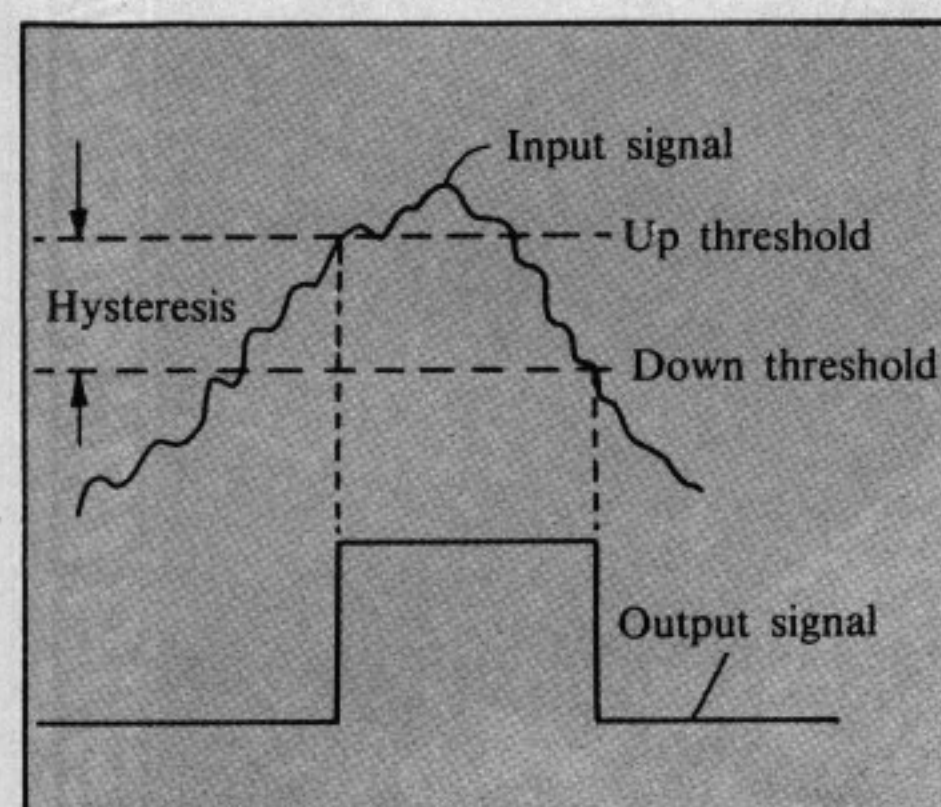


Figure IIIa: The input and output signals through a Schmitt trigger

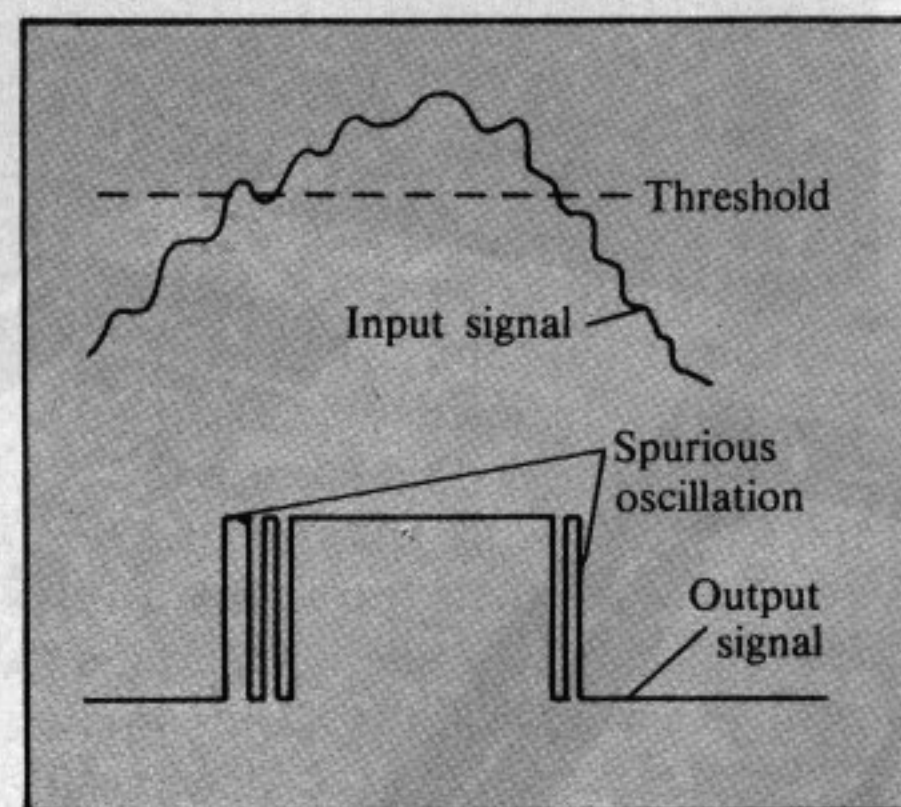


Figure IIIb: The false edges that can occur without hysteresis

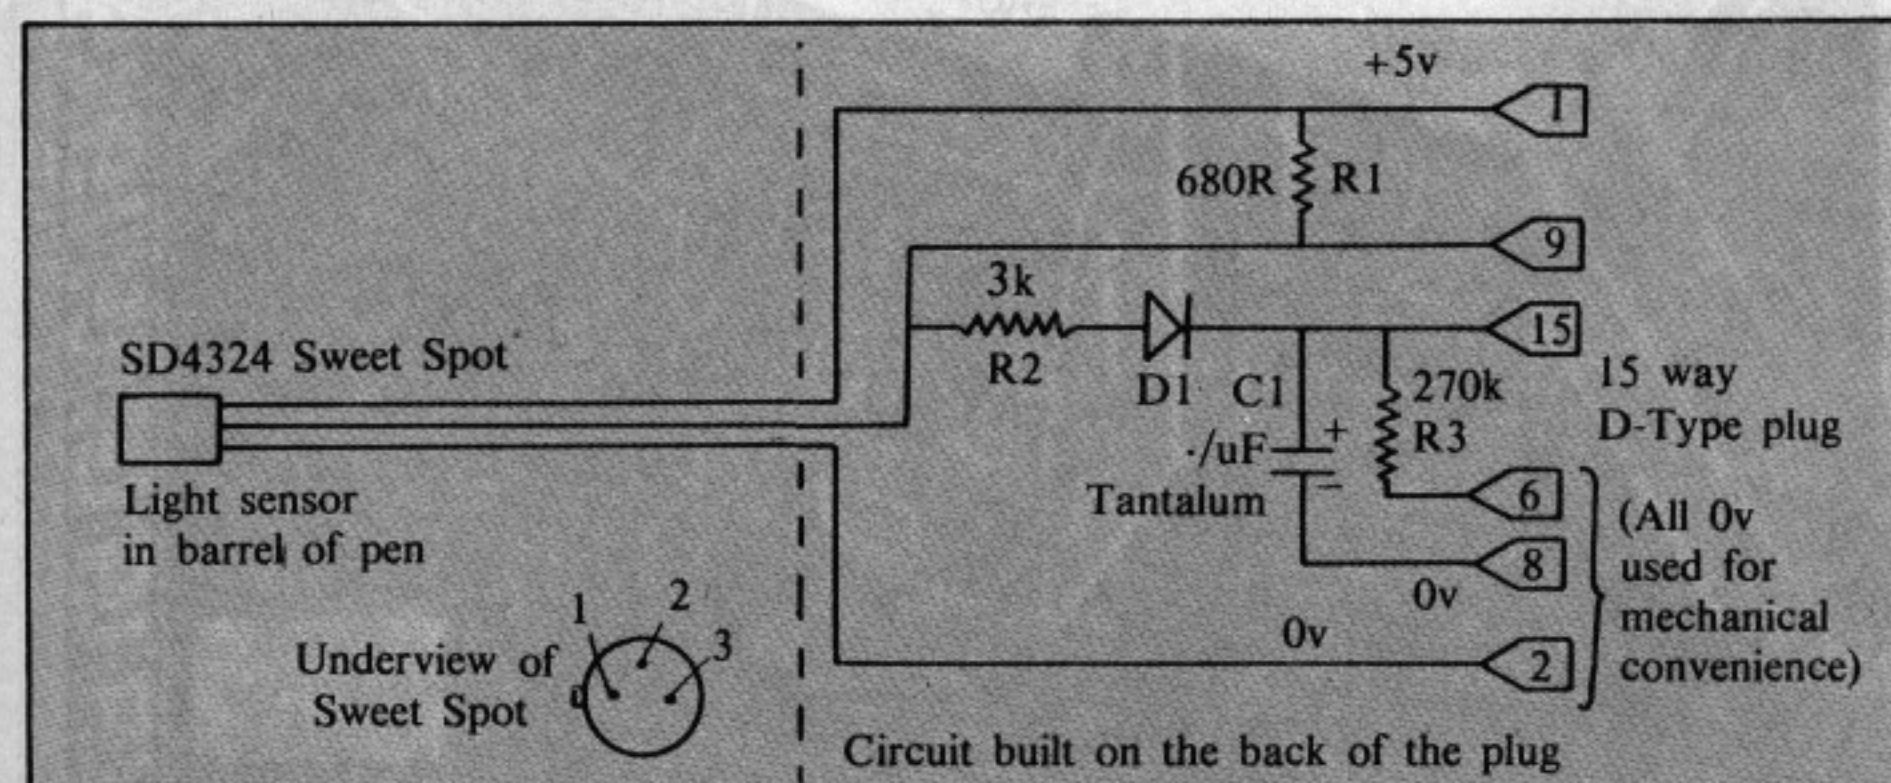


Figure IV: The complete circuit of the light pen

This is like reading a book through a piece of cardboard with a slot cut in it – you can read the whole book but only one line at a time.

So, before we can access a register in the 6845 CRT controller, we have to store its address in the address register. The registers we are interested in are the light pen position registers 16 and 17. These contain the address being generated by the CRT controller when the light pen produces a falling edge.

Note that registers 0 to 13 are Write Only registers and so cannot be examined. Registers 14 and 15 are the only read/write registers in the controller and determine the position of the flashing cursor.

What the test program does is to copy the contents of the light pen registers into these registers to display a cursor.

Note, however, that the computer does not think the cursor is in this position, and so this method cannot be used to set it.

It is a convenient way to test the light pen and let you observe the raw data being produced.

If you look closely you will see that in some modes the cursor is not directly under a character but in some in-between position. This is because in some modes there is more than single character resolution.

Occasionally the light pen will register a false position in the test program. This can be caused by the pen registers being changed while they are being read.

To cure this we must make the reading of the registers very quickly (that is, use machine code) and make sure they are read when the spot is not under the pen as then they are changing.

To do this we can use the *FX 19 instruction, but this is only available on operating system 1.0 onwards.

Another cause of false readings is the fact that the light pen input is not synchronised with the CRT controller clock.

This is an omission of the circuitry in



SNOWBALL

at £9.90 is the ultimate adventure for:

BBC 32K **COMMODORE 64** **SPECTRUM** 48K

LYNX 48K **NASCOM** 32K **ORIC** 48K **ATARI 400/800** 32K

Snowball is a massive adventure with over 7000 locations. It took nine months to perfect and marks a new leap forward in adventure games - it has a detailed, planned background and is set aboard a huge starship that would really work. Snowball could be a glimpse of the future!

You play Kim Kimberley, security agent. Your mission is to guard the colony ship Snowball 9 from sabotage.

Thus when your freezer-coffin wakes you with the Snowball still in flight, you know that something must be very wrong. You're weakened and disorientated by lengthy hibernation, but the fate of the 5 mile long space-ship is in your hands!

Snowball is our new fourth adventure. Here's what the reviewers said about the first three:

"The descriptions are so good that few players could fail to be ensnared by the realism of the mythical worlds where they are the hero or heroine... The booklet supplied with each program is very helpful. Extensive information is supplied about the game scenario... The Level 9 programs are great fun to play, and plenty happens to keep you bemused and amused for hours on end"

- *Which Micro & Software Review, August*

"A minor miracle of programming" & "An impressive suite of adventures. They are always a pleasure to play"

- *Popular Computing Weekly, 12 May & 23 June*

MIDDLE EARTH ADVENTURES

for the same micros as Snowball.

Each of these games has over 200 locations and a host of puzzles. They can be played singly or together as an impressive trilogy. Each game could well take months to solve!

1) Colossal Adventure

The classic mainframe game "Adventure" with all the original puzzles plus 70 extra rooms.

2) Adventure Quest

An epic puzzle journey.

3) Dungeon Adventure

Over 100 puzzles to solve!

Price: £9.90 each (inclusive)

Send order, or SAE for catalogue, describing your micro, to:

LEVEL 9 COMPUTING

Dept U, 229 Hughenden Road,
High Wycombe, Bucks HP13 5PG

Dealer
Enquiries
Welcome



THE BEEB BODY BUILDING COURSE

From Page 67

the BBC Micro and, short of delving about inside the computer, there is nothing that can be done. However, in practice this is hardly ever noticeable.

If you want to know more about the CRT controller "CRT Controller Handbook" by Gerry Kane provides details of the 6845 along with some others.

The book only describes the controller and not the way it is used in the BBC Micro, but its opening chapter on principles of operation is quite good. Apart from the first chapter, however, I would not recommend it for beginners.

To make the light pen really useful

Body Build Pack No 6 consists of:
SD4324-002 sweet spot light detector; C1 0.1 uF Tantalum capacitor; R1 680R; R2 3k; R3 270k; D1 Any small-signal diode like 1N4148; 15-Way D-Type plug cover; 2 ft Twin core screened cable.

A fully assembled light pen is also available as a special offer to readers of *The Micro User*.

● You can order these, as well as previous Body Build Packs, by using the order form on Page 73.

we need some software to return the pen's position in co-ordinates which Basic can understand.

I felt it would be most useful if the position of the light pen were returned in the same format required by the TAB function.

However, such a program on its own would be boring in the extreme, so I have built around it a demonstration of the sort of application in which a light pen can be used.

The program, shown in Listing 2, allows you to be in charge of 20 young

and obedient campanologists – the BBC All Stars. Just point your baton (or light pen) and bells will be rung for as long as you command.

Three procedures can be culled from this program and used in your own applications. The first of these is PROC_LINT, which initialises the variables needed to convert the CRT controller value into a TAB position.

It also compiles the machine code that accesses the registers in the CRT controller. This machine code puts the values into the X and A registers so that a USER instruction will return them combined into one number.

The procedure needs to be called only once at the beginning of the program. If it is called more than once you will get an error as it tries to redimension an array.

Of the other two procedures, PROC_LPOINT waits until the pen is pointing at the screen and then calls PROC_LPOS which returns the position of the pen in the two variables PYPOS and PXPOS.

These positions are calculated from the value in the light pen register of the CRT controller (variable PVAL) and the constants determined by the mode.

Note that they will only return the correct value if no scrolling has taken place. This is because scrolling affects the base address (or first address) of the CRT controller.

The constant TLAG is the time lag or offset value which might have to be adjusted by one or two for any particular TV display.

The remaining constants are LPR, which denotes how many controller counts constitute one row of characters, and LPC, which denotes how many controller counts there are for each displayed character.

In this set of procedures the display

mode is given by the global variable M% and must be changed whenever the mode is changed.

Observe that all the procedures start with the underscore character which is to be found on the £ key.

If you are typing in the program using Mode 7 this may be confused with the minus sign. If it is, you will get an error message when the program is run.

The rest of the program is fairly straightforward. A string of user-definable characters is set up for the graphics and this is compiled into a string for rapid display.

There is a separate string for the figure of the bellringer and each of the two positions of the bells in order to speed up the graphics.

The program ensures that a bell is only rung when the light pen is pointing at one of the two rows.

For the musical among you, the scale is in the key of C, but could be changed by altering lines 430 and 450, although I have not tried this.

As with most Body Building exercises, the program presented here is only a beginning to explore the hardware.

Using the light pen and these procedures you can write all sorts of programs – multiple choice quizzes, entering moves for board type games and all sorts of games that would not otherwise be possible.

I only wish I had time to write a light pen trombone program.

Just remember, the light pen collects light from the screen, so make your target characters as light as possible. This means using characters like hash or @ – or better still, a solid block.

As somebody once said, "The uses of a light pen are limited only by your own imagination".

NEXT MONTH: If you feel it is too early to start thinking about Christmas then Exercise No. 9 might change your mind.

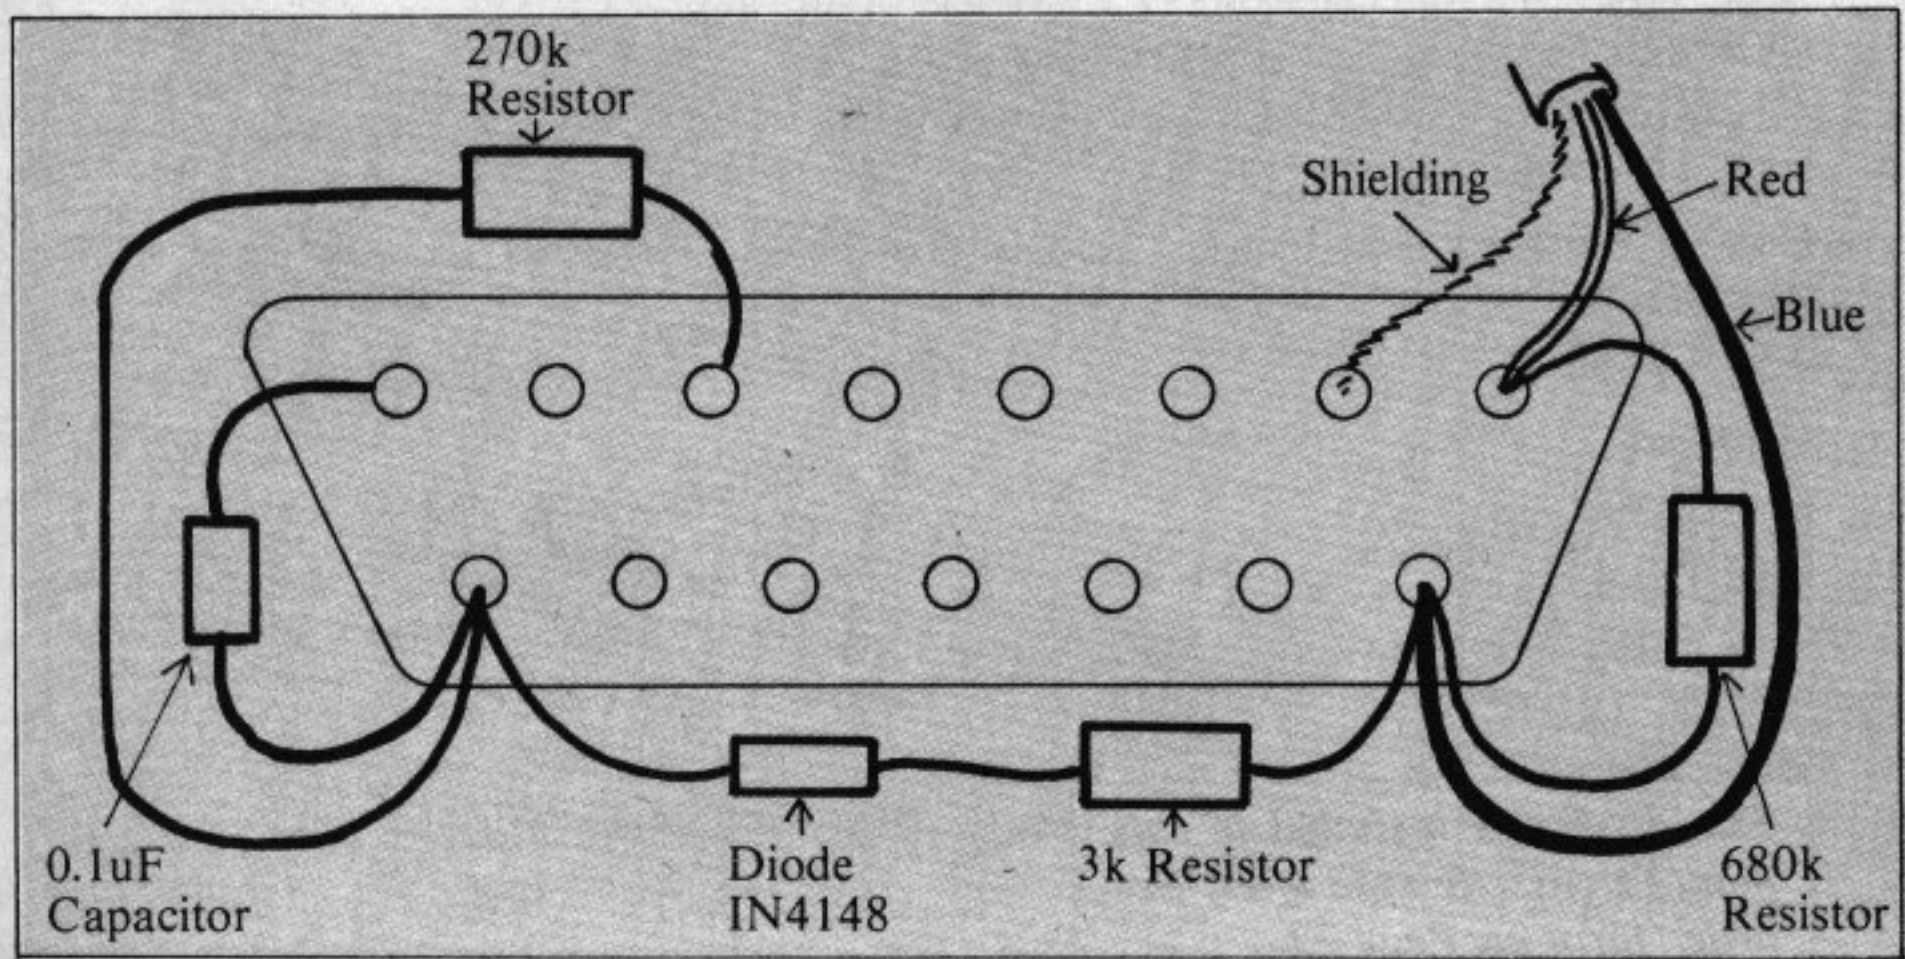


Figure V

Listing: Page 70
Order form: Page 73

From Page 69

```

10 MODE 7
20 PRINT "BEEB BODY BUILDING COURSE"
30 PRINT "OCTOBER 1983"
40 PRINT "LIGHT PEN TEST FOR SCREEN
  BRIGHTNESS"
50 PRINT "THE CURSOR WILL MOVE TO
  THE RIGHT OF PEN"
60 INPUT "WHAT MODE DO YOU WANT
  TO TEST ",M
70 MODE M
80 FOR A=1 TO 630
90 PRINT "*";
100 NEXT
110 A=ADVAL (1) DIV 64
120 ?&FE00=16
  :MSB=?&FE01
130 ?&FE00=17
  :LSB=?&FE01
140 PRINT TAB(0,15);MSB;" ";LSB;
  " ";A;" "
150 VDU 23,0,14,MSB,0,0,0,0,0,0
160 VDU 23,0,15,LSB,0,0,0,0,0,0
170 FOR A=1 TO 10
180 *FX19
190 NEXT
200 GOTO 110

```

```

10 REM BEEB BODY BUILDING COURSE
  OCTOBER 1983
20 REM By Mike Cook
30 MX=4
40 PROC_LINT
50 MODE MZ
60 ENVELOPE 1,4,0,0,0,0,0,0,127,-8,-
  9,-8,127,49
70 PRINT SPC (10);"THE LIGHT FANTAST
  IC"
80 PRINT
90 PRINT SPC (15);"STARRING"
100 PRINT
110 PRINT "THE BBC LADIES CAMPAIGNBY
  ALL-STARS"
120 PRINT TAB(0,30);SPC (10);"Conduct
  ed by LIGHT-PEN"
130 PROC_GIRL
140 PROC_LPPOINT
150 IF PYPOS=11 OR PYPOS=20
  THEN 160
  ELSE 140
160 RING=PXPOS DIV 4
170 IF PYPOS=11
  THEN P=1

```

This listing was produced using a special formatter which breaks one program line over several lines of listing. When entering a line don't press Return until you come to the next line number. Full details of the formatter are in the July issue of The Micro User.

```

  ELSE P=11
180 PRINT TAB(RING+4,PYPOS-1),BELL$(U
  PDOWN(RING+P-1))
190 UPDOWN(RING+P-1)=UPDOWN(RING+P-1)
  EOR 1
200 SOUND 1,1,NVAL(RING+P),1
210 *FX19
220 GOTO 140
230 DEF PROC_GIRL
240 DIM BELL$(1),UPDOWN(20),NVAL(20)
250 VDU 23,1,0;0;0;0;0;
260 VDU 23,244,1,2,4,4,2,1,1,31
270 VDU 23,245,128,64,32,32,64,128,12
  8,248
280 VDU 23,246,39,39,39,39,39,39,7,4
290 VDU 23,247,228,226,225,224,224,22
  4,224,16
300 VDU 23,248,8,16,16,31,4,4,4,6
310 VDU 23,249,8,4,4,252,64,64,64,96
320 VDU 23,250,24,126,126,60,60,24,24
  ,24
330 VDU 23,251,24,24,240,0,0,0,0,0
340 VDU 23,252,0,0,0,128,112,24,24,24
350 VDU 23,253,24,24,60,60,126,126,24
  ,0
360 GIRL$=""
370 BS$=CHR$(10)+CHR$(8)
380 FOR A=244 TO 249 STEP 2
390 GIRL$=GIRL$+CHR$(A)+CHR$(A+1)+B
  S$+CHR$(8)
400 NEXT
410 BELL$(0)=CHR$(9)+CHR$(9)+
  CHR$(250)+BS$+CHR$(251)+BS$+
  CHR$(32)
420 BELL$(1)=CHR$(9)+CHR$(9)+
  CHR$(32)+BS$+CHR$(252)+BS$+
  CHR$(253)
430 VNOTE=67
440 INOTE=1
  :SNOTE=1
450 NVAL(0)=93
460 PROC_PGIRL(10)
470 PROC_PGIRL(19)
480 ENDPROC

```

This listing is included in this month's cassette tape offer. See order form on Page 93.

```

490 DEF PROC_PGIRL(P)
500 PRINT TAB(0,P)
510 FOR A=0 TO 39 STEP 4
520 PRINT TAB(A,P),GIRL$
530 PRINT TAB(A,P),BELL$(0)
540 PRINT TAB(A+1,P+4),CHR$(VNOTE)
550 UPDOWN(INOTE)=1
560 NVAL(INOTE)=NVAL(INOTE-1)+8
570 IF SNOTE=4 OR SNOTE=8
  THEN NVAL(INOTE)=NVAL(INOTE)-4
580 VNOTE=VNOTE+1
590 IF VNOTE>71
  THEN VNOTE=65
600 INOTE=INOTE+1
610 IF SNOTE=8
  THEN SNOTE=2
  ELSE SNOTE=SNOTE+1
620 NEXT
630 ENDPROC
640 DEF PROC_LINT
650 DIM TLAG(7),LPC(7),GRABZ 20
660 PX=GRABZ
670 [
680 LDZ £16
690 LDA £17
700 STX &FE00
  :LDX &FE01
710 STA &FE00
  :LDA &FE01
720 RTS
730 ]
740 RESTORE 780
750 FOR A=0 TO 7
760 READ TLAG(A),LPC(A)
770 NEXT
780 DATA 1542,1,1542,2,1543,4,2053,1
790 DATA 2820,1,2820,2,3076,1,10248,1
800 ENDPROC
810 DEF PROC_LPPOINT
820 REPEAT
830 AZ=ADVAL (1) DIV 64
840 UNTIL AZ>100 AND AZ<1000
850 PROC_LPOS
860 ENDPROC
870 DEF PROC_LPOS
880 *FX19
890 PVAL=(USR (GRABZ) AND &FFFF)-TLAG
  (MZ)
900 IF PVAL<0
  THEN PVAL=0
910 LPR=80
920 IF MZ>3
  THEN LPR=40
930 PYPOS=PVAL DIV LPR
940 PXPOS=INT ((PVAL MOD LPR)/LPC(MZ))
950 ENDPROC

```



**QUICKSHOT
JOYSTICK**
Self centering type,
works even with
keyboard only programs.
Runaway success at the
BBC Micro User Show.
**ONLY
£19.95
+ £1.00 p&p**

**EASY
TABS
DEALER**

Computerama The Midlands Home Computer Specialists

**FOR EDUCATION
BUSINESS & LEISURE
ACORN SAME DAY
COMPUTER DESPATCH
DEALER ON STOCK
TELEPHONE FOR
LATEST PRICE
CHANGES**

BBC	Inc. VAT
Acorn Electron	£199.00
BBC Model B	£399.00
BBC Model B + Disc/Int	£469.00
BBC Disc Interface	£89.00
BBC A/B Full Upgrade	£69.00
BBC Teletext Receiver	£225.00
BBC 6502 2nd Processor	£299.00
BBC Z80 2nd Processor	£289.00

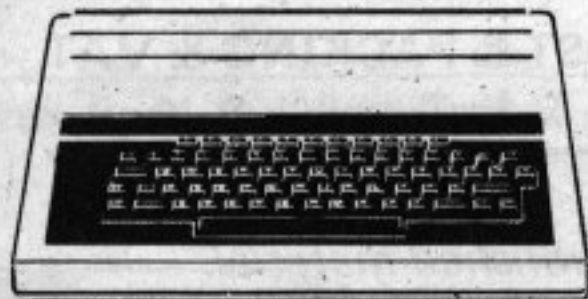

BBC DISC DRIVES	Inc. VAT
Acorn/LVL single 100K drive (expands to Double)	£265.00
Acorn/LVL dual 100K	£389.00
Pace single 100K drive	£212.75
Pace dual 100K drive	£388.00
Pace dual 40/80 track switchable double sided drive 800K	£699.00
single version of above	£368.00
Torch dual 400k Z80 + 64K disc pack	£945.00
Hitachi 3" Micro-Drive 100K	£225.00

MONITORS	Inc. VAT
Microvitec 14" colour	£287.00
Sanyo 14" colour	£284.95
Sanyo 12" green monitor	£89.00
14" TV/Colour Monitor	£289.50

ACCESSORIES	Inc. VAT
Cassette Deck BBC compatible	£27.95
Cassette Leads - all types	£2.80
BBC Joysticks	£13.00
Printer Cable (Parallel)	£10.00
BBC Dust Cover	£5.95
Light Pen	£28.75
Data Cassettes C15/C20	50p/65p

PRINTERS	Inc. VAT
Shinwa CP80	£299.00
Star DP510	£329.00
Seikosha GP100A	£219.00
Epson RX80	£349.00
Epson FX80	£459.00
NEC PC8023	£348.00
Smiths Corona TPI/E	£399.00
Juki 6100 Daisywheel	£459.00

BOOKS	Inc. VAT
30 Hour Basic	£5.95
A.L.P. for BBC Micro	£8.95
BBC Revealed	£7.95
Let your BBC Micro teach you to program	£6.95
Basic Programming on the BBC Micro	£5.95
Creative Graphics	£7.50
Graphs & Charts	£7.50
Lisp Manual	£7.50

Forth Manual	£7.50
35 Educational Programs for the BBC	£6.95
30 Progs BBC	£4.95
Further Programming for the BBC Micro	£5.95
Programming the BBC	£6.95
Using Floppy Discs with the BBC	£10.00
6502 M/C for Beginners	£5.95
Programming 6502 (Sybex)	£10.75

A&F SOFTWARE	Inc. VAT
Painter	£8.00
Planes	£8.00
Frogger	£8.00
Lunar Lander	£6.95
Pharaohs Tomb	£8.00
Tower of Alos	£6.95

APPLICATIONS	Inc. VAT
Wordwise ROM	£44.85
Beebcalc ROM	£39.00
Disc Doctor ROM	£21.85
Debugging Program ROM	£21.85
Pace DFS	£34.45

PROGRAM OF THE MONTH
Hell Driver
£7.95
Each month we recommend a
superb new game.

CLARES	Inc. VAT
Graphkey	£7.95
Replica (disc only)	£9.95
Graph Disc	£12.95
Beebsynth	£7.95
The Key (disc only)	£12.95

TORCH HAVE THE PERFECT ANSWER

With every Torch
Z80 Disc Pac
you receive:

- Perfect Writer
- Perfect Speller
- Perfect Filer
- Perfect Calc

**FREE
SOFTWARE
Value over
£1000**

ONLY £945.00

I.J.K. SOFTWARE	Inc. VAT
Atlantis	£7.50
Leapfrog	£7.50
Hyperdrive	£6.50
Invaders 'B'	£7.50
Mutant/Breakout	£6.50
Strato Bomber	£7.50

PROGRAM POWER	Inc. VAT
Asteroid Storm	£7.95
Barrage	£7.95
Chess Model B	£7.95
Cowboy Shoot Out	£6.85
Croaker	£7.95
Danger UXB	£7.95
Eldorado Gold	£6.85
Escape From Moonbase Alpha	£7.95
Galactic Commander	£7.95
Hell Driver	£7.95
Junior Maths	£6.85
Killer Gorilla	£7.95
Laser Command	£7.95
Seek	£6.85
Swoop	£7.95
Time Trek	£7.99
World Geography	£6.85
Where	£6.85

BUG BYTE	Inc. VAT
Dragon Quest	£11.50
Golf	£5.50
Polaris	£5.50
Space Warp	£9.00
Music Synth	£9.50
Galaxy Wars	£7.50
Sea Lord	P.O.A.
City Defence	£7.50
Oblivion	£7.50

BBC/ACORN SOFTWARE	Inc. VAT
Castle of Riddles	£9.95
Algebraic Manipulation	£9.95
Arcade Action	£11.90
Arcadians	£9.95
Business Games	£9.95
Chess	£9.95
Creative Graphics	£9.95
Countdown to Doom	£9.95
Cube Master	£9.95
Desk Diary	£9.95
Forth	£16.85
Graphs & Charts	£9.95
Lisp	£16.85
Missile Base	£9.95
Meteors	£9.95
Monsters	£9.95
Peeko Computer	£9.95
Philosophers Quest	£9.95
Planetoid	£9.95
Rocket Raid	£9.95
Sliding Block Puzzles	£9.95
Snooker	£9.95
Sphinx Adventure	£9.95
Starship Command	£9.95
Super Invaders	£9.95
Tree of Knowledge	£9.95
Snapper	£9.95
View	£59.00

MAIL ORDER

Post your order today to:
**Computerama, 1 Sash Street,
Stafford ST16 2PS.**
Or telephone your Access or
Barclaycard number, we will
despatch immediately (0785) 41899.
Call in today. See the Midlands
Home Computer Centre for the BBC
enthusiast.
Send large S.A.E. for further details
of any product.

CARRIAGE COSTS

Micro's, Monitors, Disc Drives,
Printers £8.00. Books £1 each.
Cassette Decks £2.00. Leads and
software 50p/item.
Three items - no charge.

computerama

The Midland's Home Computer Specialists.

STAFFORD
59 Foregate Street, Stafford,
ST16 2PR. Tel: (0785) 41899

STOKE-ON-TRENT
11 Market Square Arcade,
Hanley, Stoke-on-Trent,
ST1 1PD.
Tel: (0782) 268620

BBC

**SERVICE
INFORMATION
CENTRE**

SHREWSBURY
13 Castle Gates, Shrewsbury
SY1 2AB. Tel: (0743) 60528



Silverlind

SILVERLIND LTD. 156 Newton Road, Burton-on-Trent, Staffs. DE15 0TR. Tel Burton (0283) 63987

STRATEGY GAMES

PENTILES BBC/B £6.95
An original and addictive game for all ages from 8 to 80 requiring skill, memory, logic - and luck!

REVERSI BBC/B £6.95
Play the computer in this fast BASIC/machine code version of the popular board game. 5 skill levels, auto-play, etc.

ADVENTURE GAMES

HAUNTED HOUSE BBC/B £6.00
An excellent introduction to adventure games. Can you survive the perils of the castle and the graveyard, to collect the 6 treasures AND rescue the princess?

JOURNEY TO THE STARS BBC/B £6.50
You have been sent on a dangerous mission to find 10 treasures - but how are you going to get back? Beware of the Antiflavian MegaTiger and venomous lizard woman!

PASSPORT TO DEATH BBC/B £6.50
From the planet Zandra, you have been sent to Earth, a strange place with stranger inhabitants! Finding treasures is not enough - without extra fuel, your starship will not get you home.

EDUCATIONAL PROGRAMS

ENJOY MATHS 48K Spectrum £8.00
A suite of 4 highly motivating programs for the 8 - 14 age range: tables, simple equations, polygons and areas. The programs combine explanation with tests and make good use of colour and sound.

TOWNTTEST BBC/B £6.50
Identify the major towns and cities of England, Scotland and Wales, displayed on a high-resolution map. Suitable for all age groups and for school or home use (try it as a quiz for all the family!)

BIOLOGY BBC/B £12.50
A major collection of programs, written by a GCE examiner, designed to aid the understanding of Biology to CSE, 'O' and 'A' Level standards. These programs - comprising text, animated diagrams and questions - are available in one package and are suitable for individual study at school or in the home. Teachers will also find material suitable for class demonstration.

ALL PRICES INCLUDE POST & PACKING & VAT

We require good programs to increase our catalogue and pay high royalty rates for published material.

CUBE the professional approach to the BBC microcomputer

Control Universal offers an unsurpassed level of technical support with the sale of BBC Microcomputers, hardware and software extensions.

Control Universal has been trading with Acorn since 1979 and our engineers have built up a detailed understanding of all their products, from Eurocards through the Atom, the BBC and now the Electron.

CUBE is a wide range of exciting and keenly-priced products built to robust professional standards. All are compatible with the Acorn Standard, but all considerably extend its power and capability.

Control Universal also keep substantial stocks of all Acorn/BBC products and a huge selection of other compatible hardware and software from a wide range of large and small companies.


BEEBEX from £56
This adds a one megabyte extension memory map to the BBC microcomputer, allowing the use of all the CUBE modules with the BBC.
CU-DRAM 64KB up to 16 can be used in one system £148
CU-MEM up to 64KB Battery backed RAM or EPROM carrier from £70
CU-PROM EPROM programmer £102
CUBE-ICE in circuit emulator £90
ROMULATOR EPROM emulator for system development £95
CUBAN eight and twelve bit analog interfaces from £120
CUBIO up to 80 digital i/o channels from £53
SERIO two or four serial channels from £90
.....and many more

CUBE disk packs for BBC
Fully enclosed with all necessary cables and connectors ready to use
100KB-one drive, single-sided 40 track £169
200KB-twin drive, single-sided 40 track £299
400KB-one drive, single-sided 80 track £229
800KB-twin drive, double-sided 40 track £559
BBC utilities disk with manual £35

EuroBEEB £139
An incredible single card computer with 6502 processor, serial and digital interfaces and four sockets for byte-wide memories with battery back-up. Supplied with MOS (machine operating system) that allows the use of a BBC 16K BASIC ROM or other language. Usual configurations as follows:-
1) 8K MOS ROM 2) 8K MOS ROM
16K BBC BASIC 16K BBC BASIC
4K or 8K user program 2K or 8K RAM
EPROM 2K NMOS RAM
2 K NMOS RAM or leave empty

EuroBEEB has a standard CUBE bus connector and will drive any CUBE module, including the CU-GRAPH high-res colour video interface (48K screen memory).


Catalogue
The Autumn 1983 catalogue is now available free of charge. It has 150 - pages and includes all BBC equipment and associated extensions, software, media, videos, printers and the whole of the CUBE range.
All prices exclude VAT.

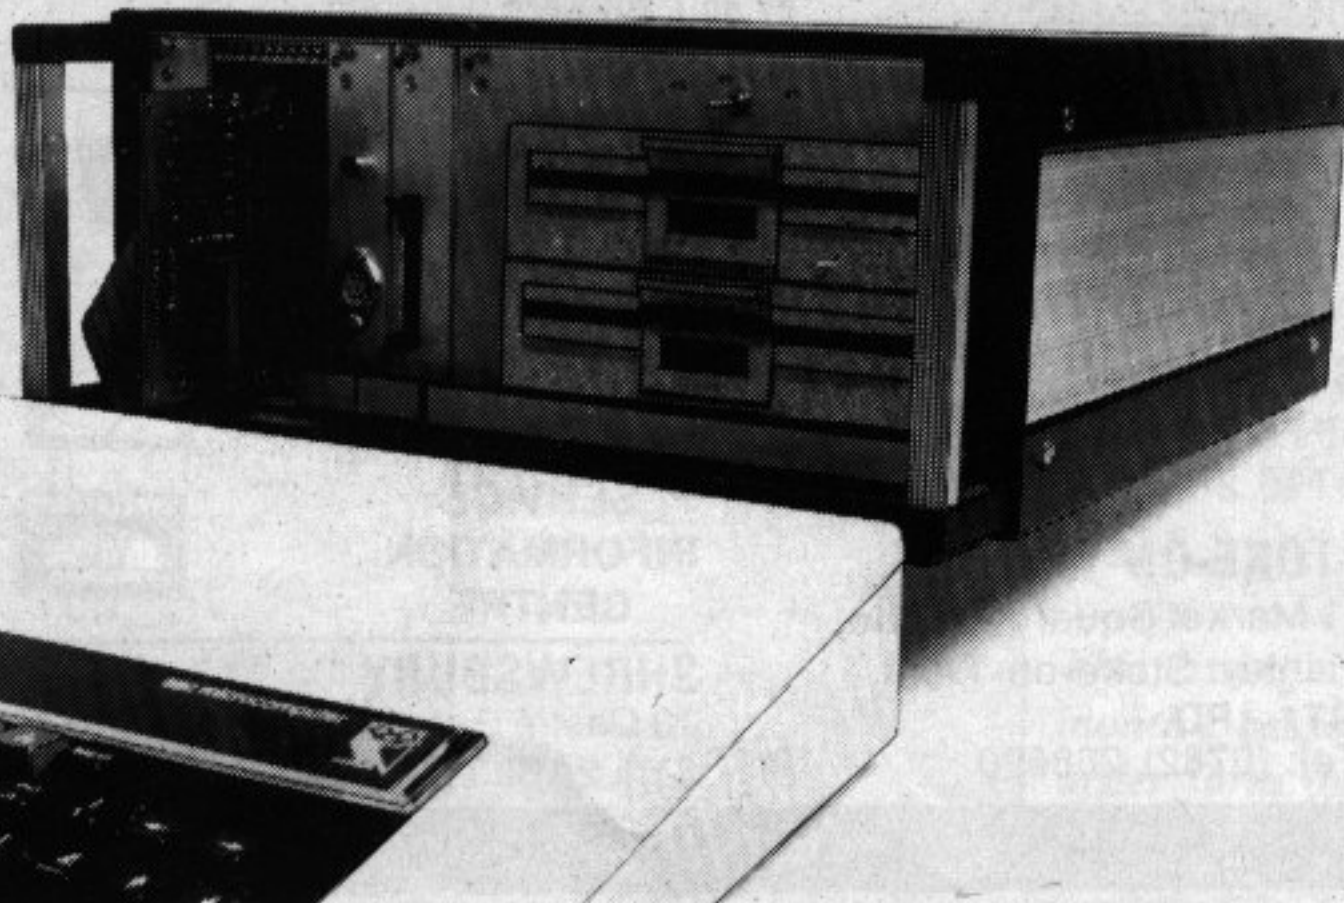

Control Universal Ltd
The Hardware House


Unit 2, Andersons Court,
Newnham Road, Cambridge CB3 9EZ
Telephone (0223) 358757

THE BEEB BODY BUILDING COURSE

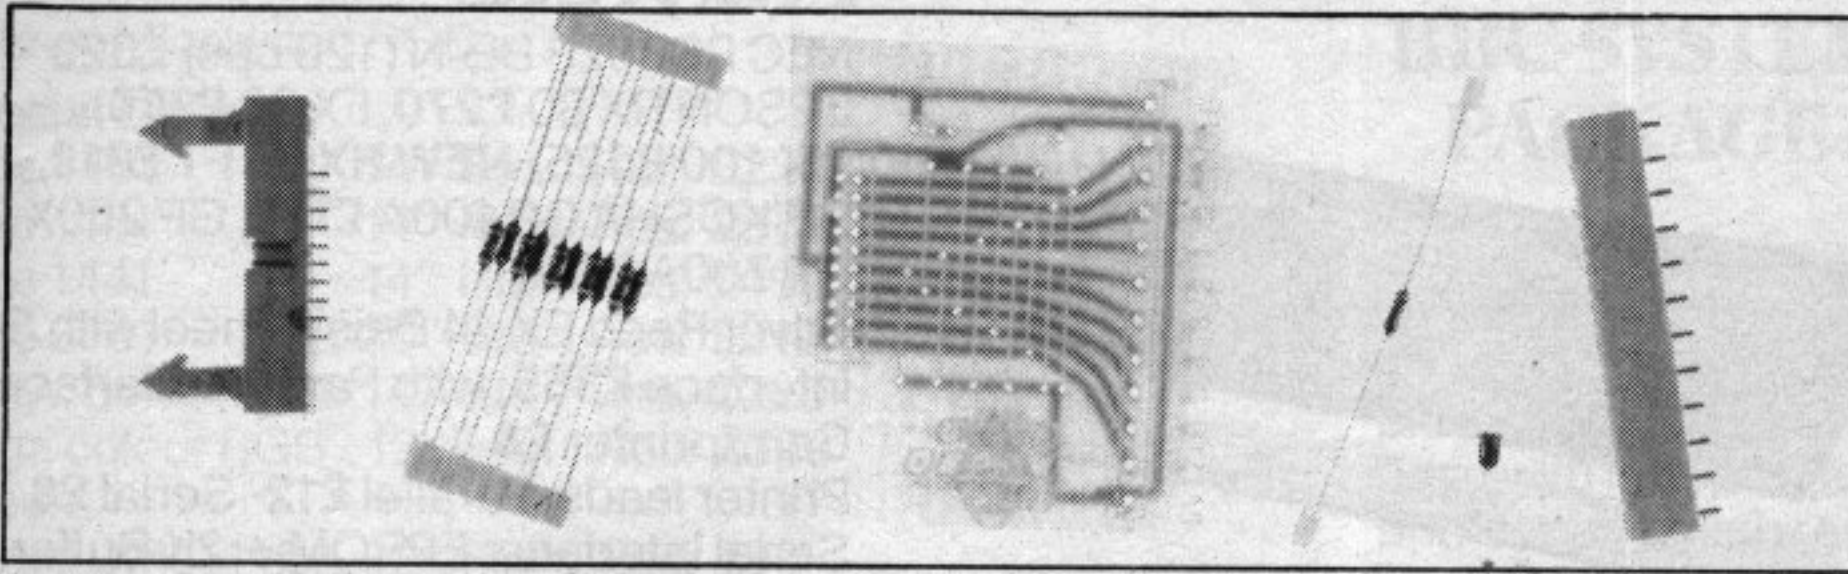


Beeb Body Building Pack 1


SIX WAYS OF GIVING YOUR BEEB

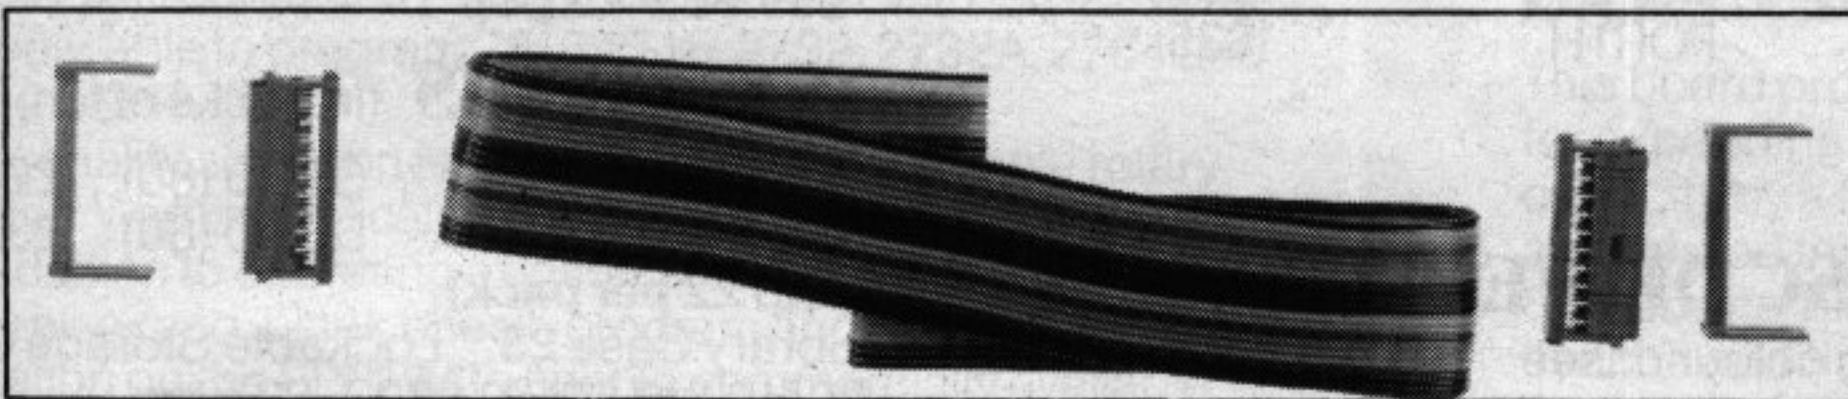


Beeb Body Building Pack 2

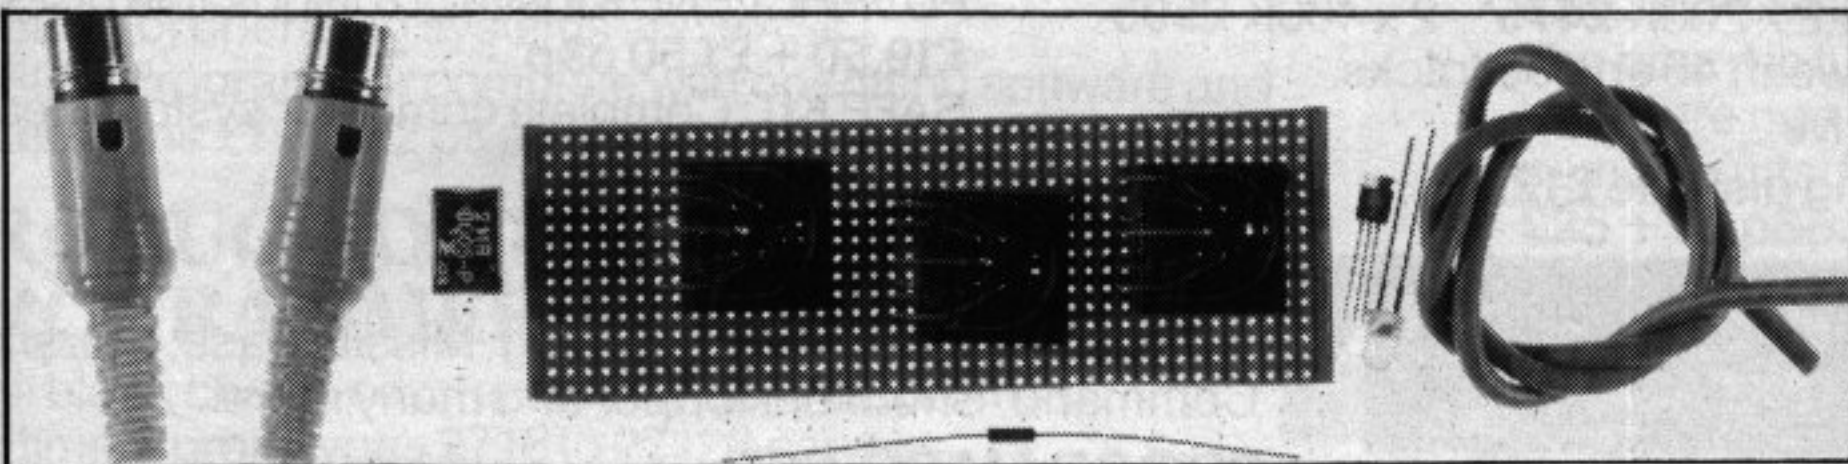


Beeb Body Building Pack 3

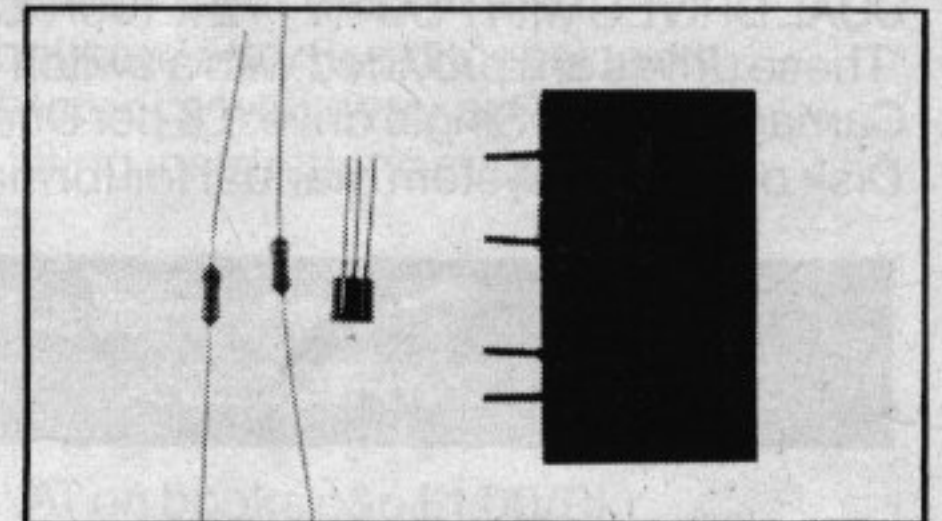

Beeb Body Building Pack 4

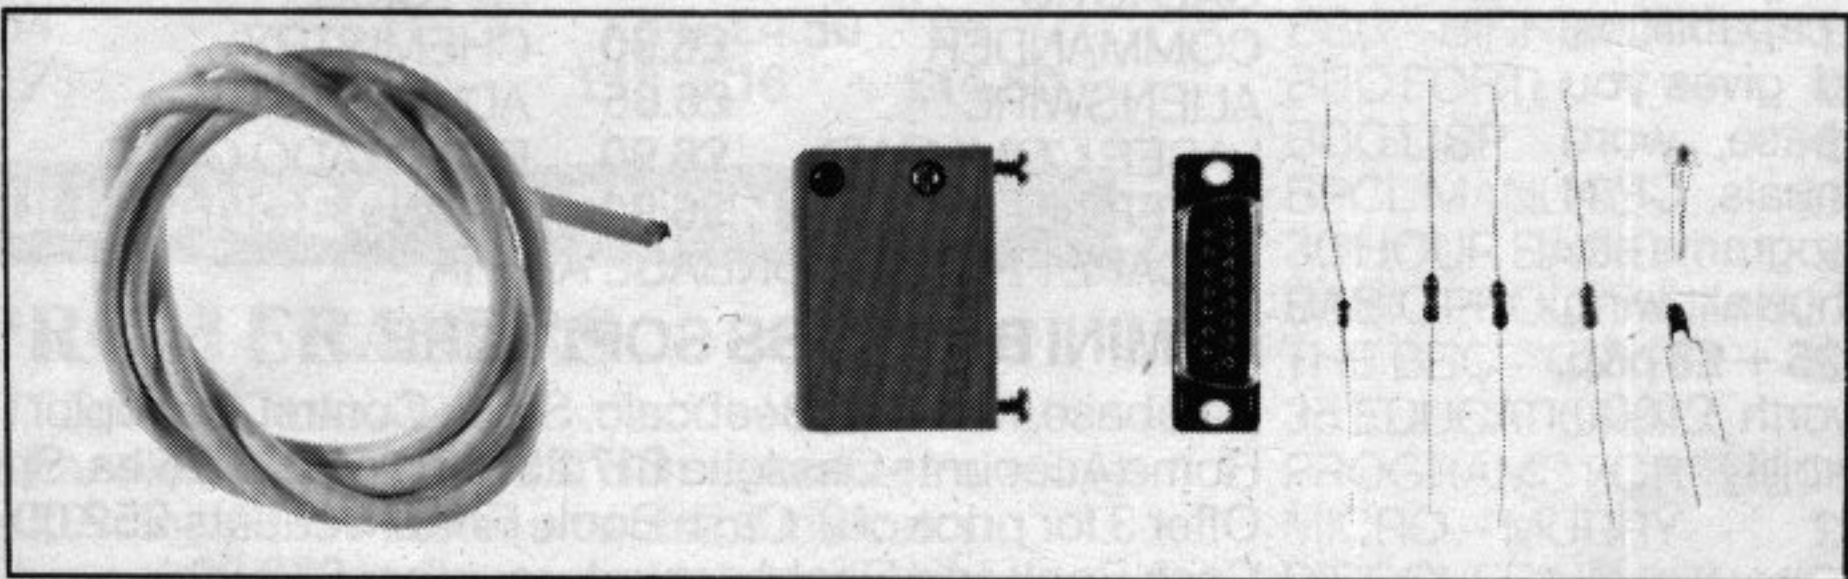

Beeb Body Building Pack 6

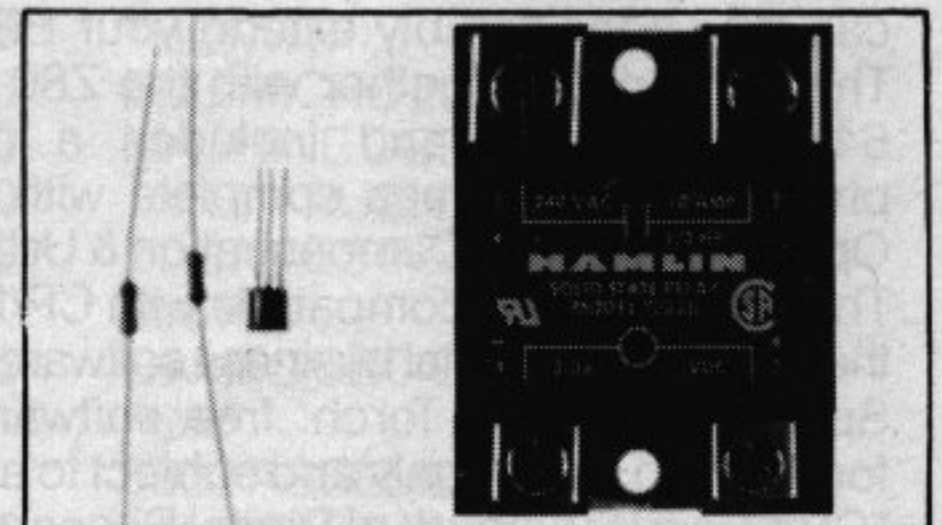

Beeb Body Building Pack 5

YOUR ORDER FORM for the Beeb Body Building packs

Please send me:

- No. ☐ Beeb Body Building Pack 1 @ £8.65 £
☐ Beeb Body Building Pack 2 @ £8.65 £
☐ Beeb Body Building Pack 3 @ £8.65 £
☐ Beeb Body Building Pack 4 @ £8.65 £
☐ Beeb Body Building Pack 5 @ £11.26 £
☐ Beeb Body Building Pack 6 @ £11.90 £

Described in issue:
 July 1983 page 83
 July 1983 page 83
 August 1983 page 85
 Sept 1983 page 91
 Sept 1983 page 91
 October 1983 page 69

Name

Address

.....

.....

POST TO: BBC Packs, Micro User, Europa House,
 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

Please allow 28 days for delivery

*Postage and packing
 FREE if more than
 one pack is ordered.

Total cost £

* Plus carriage £1.00

Total £

+ V.A.T. @ 15%.

Technomatic Official BBC Dealer


01-452 1500 01-450 9764 01-450 6597 Telex: 922800

BBC

Model B £347 + £7 p&p

A to B Upgrade Kit £60
Installation £15
Individual Components and Connectors available.

Floppy Disc Interface Kit £95
Installation extra.

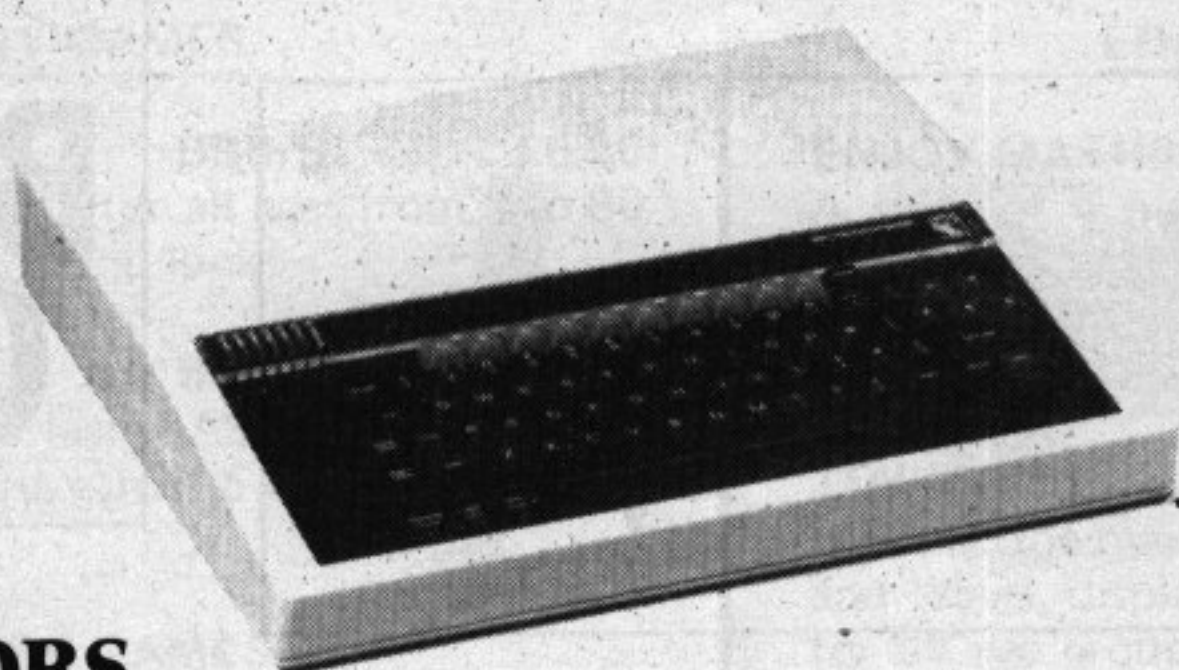

WORD PROCESSORS

VIEW 16K ROM £52
WORDWISE 8K ROM £34.50
BEEBPEN 8K ROM £32.00

BEEBCALL Spread Sheet
ROM 8K £34.00

LANGUAGE ROMs

PASCAL T	£59
BCPL	£86
FORTH	£35

BBC DISC DRIVES

Single 100K £230 Dual 2 x 400K £699.

BBC COMPATIBLE 5 1/4" DISC DRIVES

These drives are supplied in BBC matching colour cases and with necessary cables.

SINGLE DRIVES CASED	100K £150	200K £215*	400K £265
SINGLE DRIVES with PSU	100K £185	200K £260*	400K £330
DUAL DRIVES with PSU	2 x 100K £355	2 x 200K £475*	2 x 400K £595

*These drives are provided with a switch between 40 and 80 tracks.

Carriage: £6 per Single drive; £8 per Dual drive.

Disk operating system manual for formatting diskette £12.50

PRINTERS

NEC PC8023 BE-N (120 cps) £320
EPSON RX 80 £270, FX 80 £370,
MX 100 £425, NEW RX 80 FT £319,
SEIKOSHA GP 100A £175, GP 250X £235
GP 700A £425

Silver Reed EX 44 Daisy wheel with Serial Interface £365; with Parallel Interface £385
Carr./printer £8

Printer leads: Parallel £12 Serial £8
Serial Interface: EPROM + 2K Buffer £60
NEC £60

Listing Paper 2,000 fanfold sheets 9 1/2" x 11" £13.50 + £3.50 p&p

Spare Ribbons available.

Printer Sharer

Single Printer for up to 3 BBCs
£59.95 + £2 p&p

DISKETTES (In packs of ten)

SSSD (40) £15	SSDD (80) £24
SSDD (40) £18	DSDD (80) £32

(p&p £2 per pack)

Library Case £3 Lockable Storage Cases
30/40 £17 60/70 £32 + £2 p&p.

DISC CLEANING KITS

FLOPPICLENE Kit with 50 disposable discs
£19.50 + £1.50 p&p

SAFE KIT: Complete computer system cleaning kit £30 + £3 p&p

SOFTWARE

Full range of **Acornsoft** including: Missile Base, Starship Command, Snooker Hopper and many more.

PROGRAM POWER

CROAKER	£6.90	DANGER! UXB	£6.90
KILLER GORILLA	£6.90	CHESS B	£6.90
GALACTIC		PHYSICS	£6.05
COMMANDER	£6.90	CHEMISTRY	£6.05
ALIENSWIRL	£6.05	ADVENTURE	£6.90
LASER COMMAND	£6.90	ELDORADO GOLD	£6.05
ASTEROID STORM	£6.90	DRAW	£8.65
ESCAPE FROM MOONBASE ALPHA			£6.90

GEMINI BUSINESS SOFTWARE

Database, Mail List, Beebcalc, Stock Control, Beebplot, Home Accounts Cassette £17.25 ea. Disc £20.25 ea. Special Offer 3 for price of 2. Cash Book, Final Accounts £52.00 ea. Cash Book and Final Accounts together £82.00.

TABS BUSINESS SOFTWARE FOR TORCH

Sales Ledger, Purchase Ledger, Mailing List £99 ea.

SMARTMOUTH WITH AN INFINITE VOCABULARY

A ready built speech synthesiser unit, allowing the creation of any English word, with both ease and simplicity and at the same time being very economical in memory usage. No specialist installation—and no ROMs, simply plug into the user port. Smartmouth is supplied with demo and development programs on cassette, and full software instructions £37 + £2 p&p.

Phone for availability of

ELECTRON, 2nd PROCESSOR, TELETXT ADAPTOR

TORCH Z-80 PACK

For little more than the cost of an 800K disc drive, you can now considerably extend your BBCs capabilities. The twin drives, together with the Z80 card, gives you 64K of memory and includes a database, word processor etc. Comes complete with manuals, CP/N Operating System, Demonstration & Utility programs etc. The system is fully compatible with CP/M* thus allowing the use of professional business software. £825 + £8 p&p. Special offer from Torch: free software worth £1000, for a limited period only and subject to availability.

*CP/M is a trademark of Digital Research

CASSETTE RECORDER

Sanyo DR101 Data Recorder £39

BBC Recorder £28

Datex Slim Line Recorder £20

Hi quality cassette lead £3

Audio Digital Cassette C12 1 for 50p 10 for £4.50

Hobbit Floppy Tape System

(High Speed Cassette Recorder)

Average Access Time 22 seconds; 101K Byte/ Cassette. Fully built, boxed and tested.

Just plug in and ready to use. £135 p&p £3.

Hi speed Mini Cassette £3

TECHNOMATIC LTD

MAIL ORDERS TO: 17 BURNLEY ROAD, LONDON NW10 1ED

SHOPS AT: 17 BURNLEY ROAD, LONDON NW10

(Tel: 01-452 1500, 01-450 6597, 01-450 9764. Telex: 922800)

305 EDGWARE ROAD, LONDON W2 01-723 0233

We specialise in EXPORT orders. No VAT on export. Carriage at cost.

Orders from Schools, Colleges, Educational Departments and Government Establishments are always welcome. For fast delivery quote your Access or Visa number.

ALL PRICES EXCLUDE V.A.T.

SPECIAL PRICING FOR BULK BUYERS

on Cables, Connectors, Floppy Discs, Eproms

MONITORS

Colour: Microvitec RGB

Special Offer

Type 1431 14" Std. Res. **£230** (Leads inc.)
 Type 1451 14" Med. Res. **£374** (Leads inc.)
 Type 1441 14" High Res. **£499** (Leads inc.)
 Type 2031 20" Std. Res. **£319** (Leads inc.)
 Sanyo colour RGB 14" Std. Res. **£220**
 Kaga colour RGB 12" High Res. **£399**
Green
 Sanyo DM8111CX 12" High Res. **£99**
 NEC PC8041B 12" High Res. **£120**
 High Res. Green on matt screen with sound facility.
 (RGB Lead **£6.50**; BNC Lead **£3.50**)
 Carr. 14" & 20" **£8**; 12" **£6**

EPROM PROGRAMMER

A fully self-contained Eprom Programmer with its own power supply, able to program 2516, 2716, 2732, 2732A, 2764 and 27128 EPROMS.

Personality selection is simplified by use of a single rotary switch. Warning indicator for when programming is in operation. In addition to operating as other standard programmers, it can also read, blank check, program and verify at any location on the EPROM to enable commercially available programmed EPROMs to be customised.

Simple menu driven software supplied on cassette (transferable to disc or EPROM if you prefer) is fully compatible with all versions of operating systems and BASIC.

EPROM Programmer complete with operating software and instructions **£79 + £2 p&p**.

PRODUCTION EPROM PROGRAMMER Type P8000

It will blank check, copy and verify up to 8 Eproms at a time. Eprom types 2716 to 27128 can be selected by a single rotary switch.

£695 + £6 carriage.

EPROMS (for BBC)	1-24	25-99	100
2764	£5	£4.50	£4
27128	£18	£16	£14.50

FULL RANGE OF EPROMS IN STOCK

EPROM ERASERS

UV 1T Eprom Eraser:

Can handle up to 6 Eproms at a time. Average erasing time 20 mins. Built-in timer and mains indicator. Built-in safety interlock ensures no accidental exposure to harmful UV rays. **£59 + £2 p&p**.

ACORN SPEECH KIT

This gives high quality speech using simple 'SOUND' commands. There is a choice of 165 words and part words from the internal ROM. Cartridge socket for future ROMs also supplied. **£47.80**.

BBC SYSTEM PACKAGE

BBC system package is supplied with a model B computer fitted with disc interface kit and View word processor rom, 800K dual disc drive with independent power supply, NEC PC 8023 printer and a high resolution green screen monitor. The system comes complete with all connecting cables and manuals.

Package Price £1,400 a saving of over £100.

SPECIAL OFFER

SIDEWAYS ROM EXPANSION BOARD

This board provides 8 high quality 28 pin sockets for expanding the computer's sideways ROM capacity by a further 128K. (Although it is anticipated that 40mA will be consumed on 8K Eproms, higher with 16K, it is our opinion that the addition of 8 extra roms will not overload the computer psu nor cause internal overheating).

All ROM sockets are of turned pin type gold contacts to ensure that numerous insertions and extractions will not wear out or deform them.

The board is fully buffered and also dimensioned to ensure non interference with other on board components. Full fitting instructions supplied.

£25 + £2 p&p.

ADVANCED USER GUIDE

£12.95 + £1.55 pp

Now Available

BBC BOOKS

(No VAT on books p&p £1.00/Bk)

ASSEMBLY LANGUAGE
 PROGRAMMING FOR THE
 BBC - BIRNBAUM **£8.95**
 BBC FORTH **£7.50**
 BBC LISP **£7.50**
 BPCL MANUAL **£15.00**
 30 HOUR BASIC **£5.50**
 BASIC PROGRAMMING ON
 THE BBC - CRYER **£5.95**
 35 EDUCATIONAL
 PROGRAMS FOR THE BBC
 MICRO - MURRY **£6.95**
 DISCOVERING BBC MICRO
 MACHINE CODE -
 STEPHENSON **£6.95**
 INTRODUCTION THE BBC
 MICRO - SINCLAIR **£5.95**
 EASY PROGRAMMING FOR
 THE BBC MICRO -
 BEESON **£5.95**

FURTHER PROGRAMMING
 FOR THE BBC MICRO -
 THOMAS **£5.95**
 BBC MICRO INSTANT
 MACHINE CODE (BOOK &
 TAPE) - RUSHTON **£20.00**
 21 GAMES FOR THE BBC
 MICRO **£5.95**
 GAMES BBC COMPUTERS
 PLAY **£6.95**
 6502 ASSEMBLY
 LANGUAGE PROGRAMMING
 (LEVENTMAL) **£12.10**
 PROGRAMMING THE 6502
 (ZAXS) **£10.95**
 STRUCTURED BASIC ON
 BBC **£7.95**
 SOUND & GRAPHICS ON
 BBC **£7.95**

Please send SAE for our detailed price list of electronic and computer components.

We carry a wide range of connectors and assemblies, Microprocessors, RAMs, EPROMs, Crystals, etc.

Price Lists, Leaflets available on request. Large stocks enable same day despatch on most orders. Please check for delivery details.

PLEASE ADD 50p p&p & 15% VAT

(Export: no VAT, p&p at Cost)

Orders from Government Depts. & Colleges etc. welcome.



Detailed Price List on request.

Stock items are normally by return of post.




TECHNOMATIC LTD

MAIL ORDERS TO: 17 BURNLEY ROAD, LONDON NW10 1ED

SHOPS AT: 17 BURNLEY ROAD, LONDON NW10

(Tel: 01-452 1500, 01-450 6597. Telex: 922800)

305 EDGWARE ROAD, LONDON W2

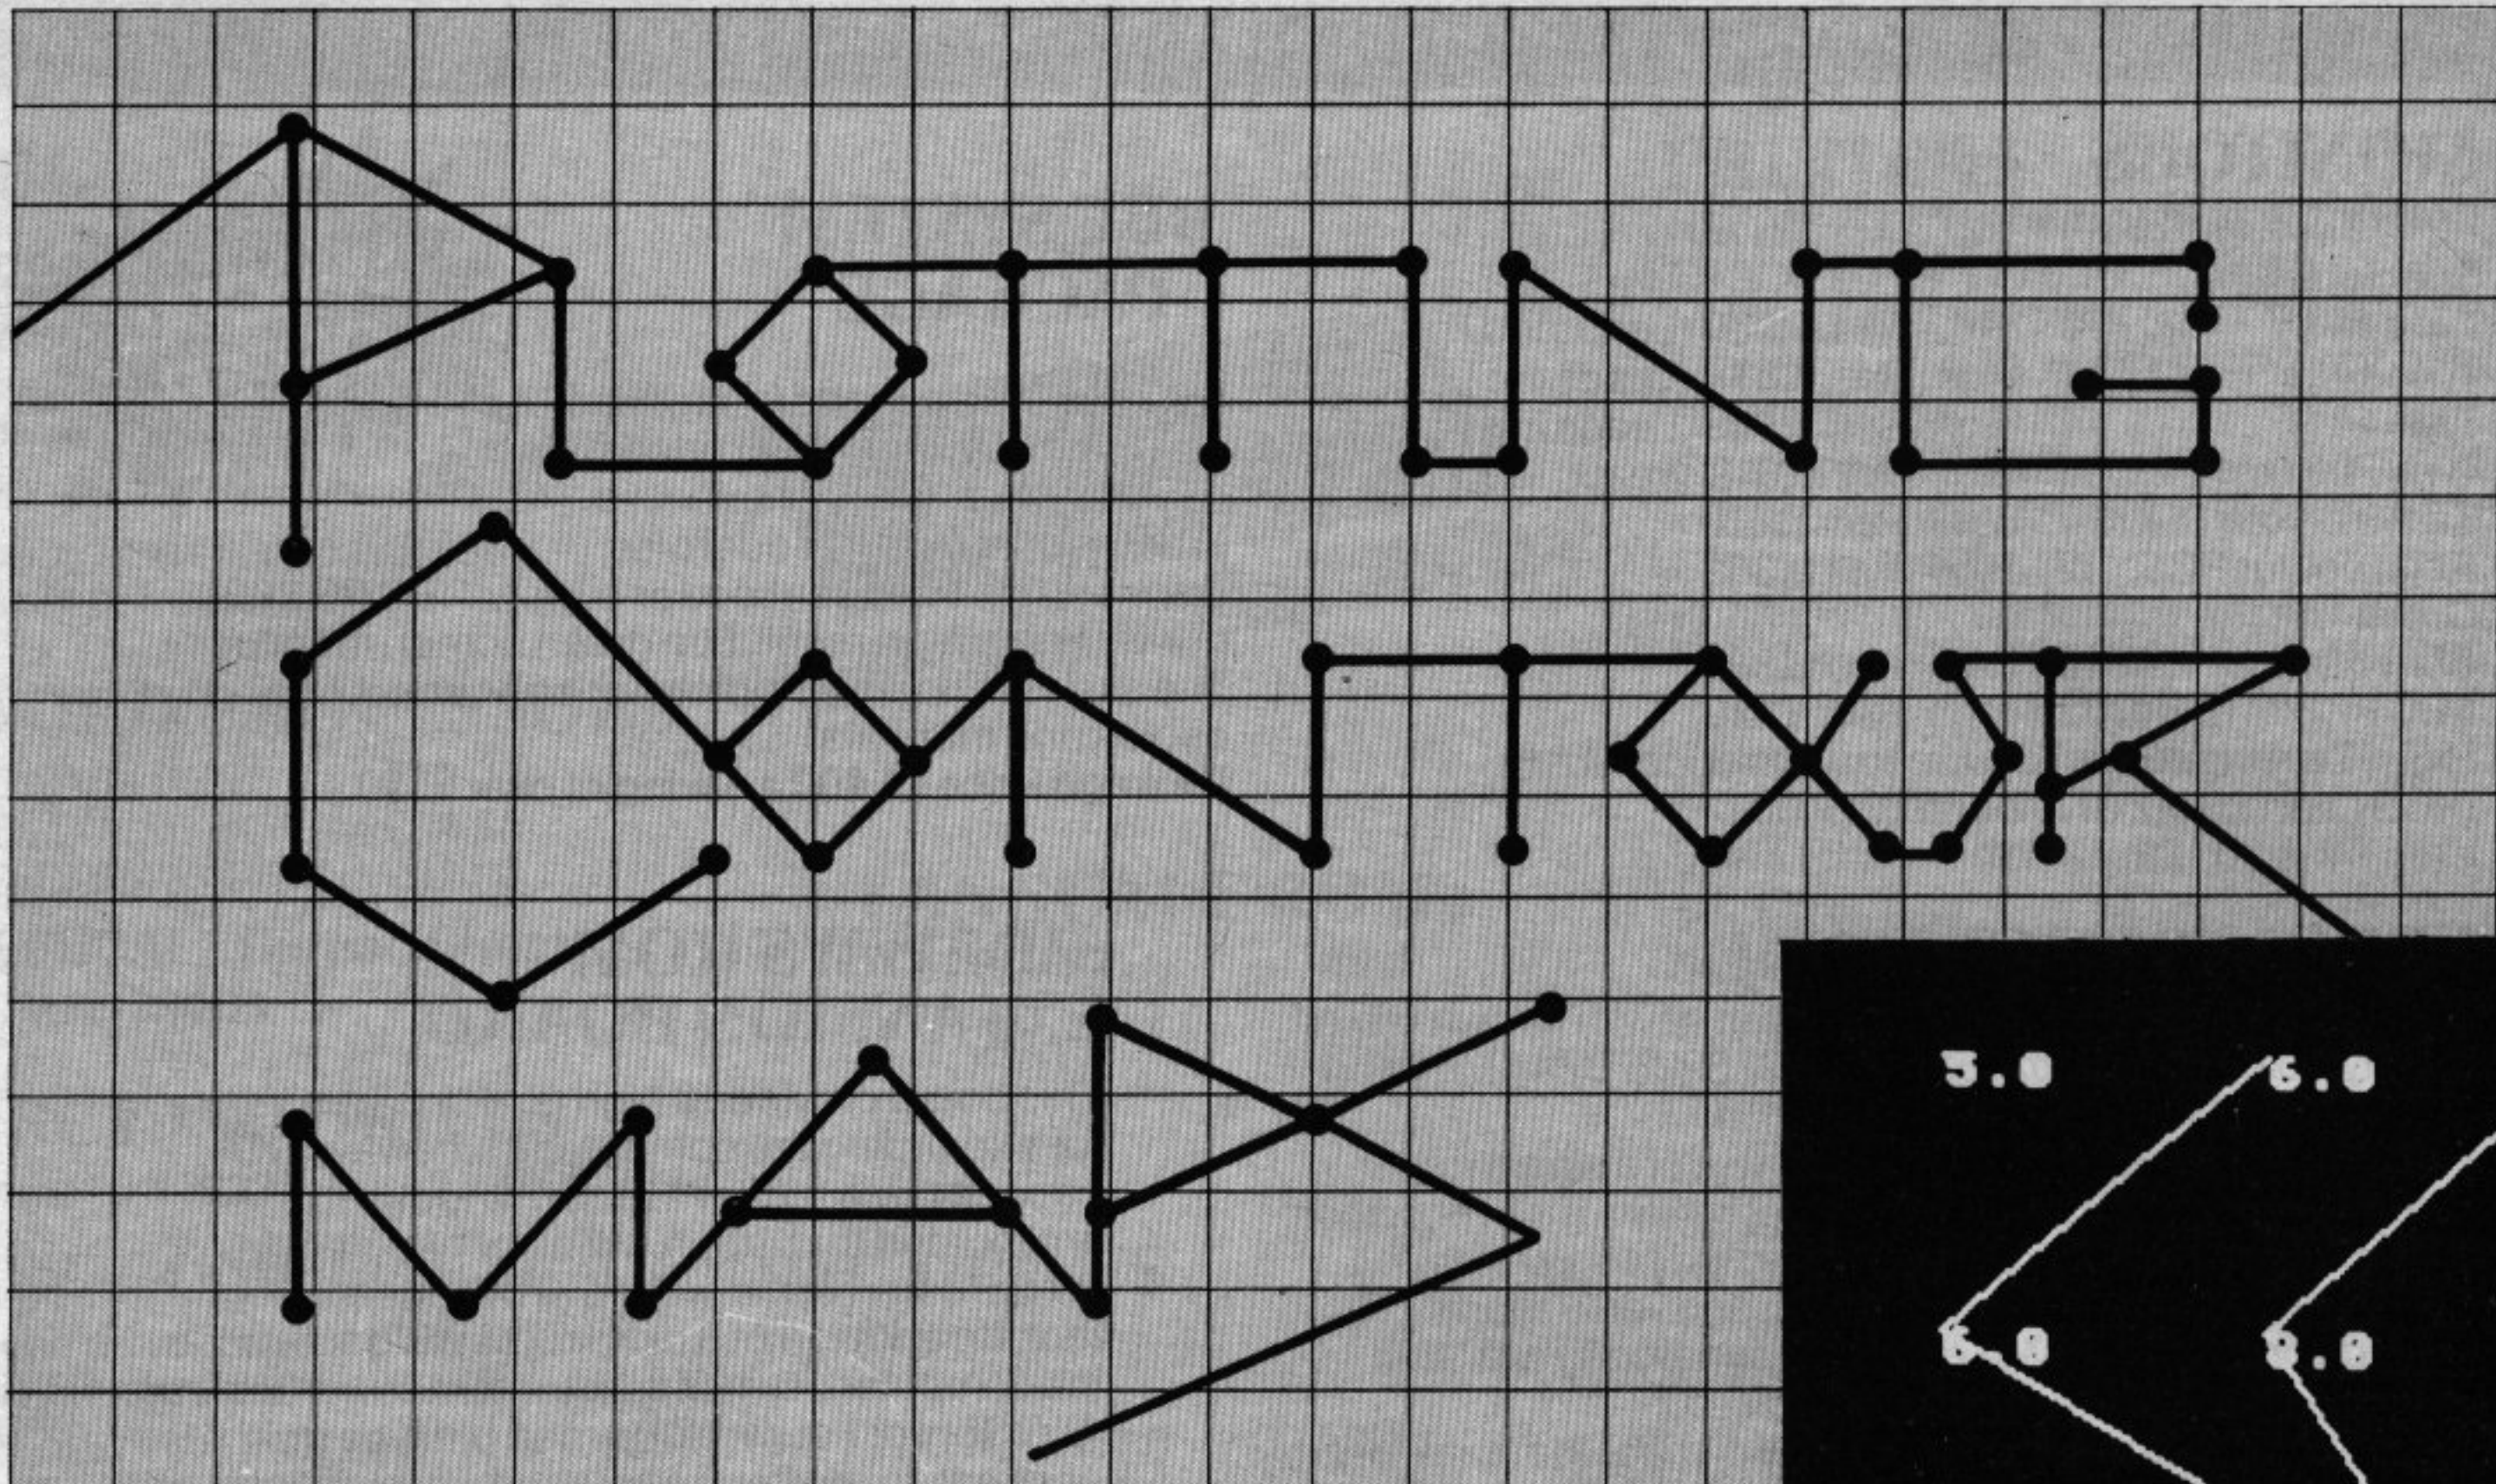

CONTOUR maps are plotted by many other people besides the Ordnance Survey. Architects and landscape gardeners use contour maps of the areas on which they are working and meteorologists use contours to plot air pressure and temperature, although they call them **isobars** and **isotherms**.

Engineers and scientists use contour maps to describe variations in measured results over two dimensional surfaces such as temperature on the surface of an aircraft wing or deviation from the correct shape in a telescope mirror.

There are two different methods of plotting a contour map. In the first each contour is plotted separately in its entirety. A starting point is found and it is traced round and plotted until it is complete.

In the second method the area to be covered is divided into cells, each of which is examined separately and plotted. For each contour, this method looks at each cell in turn and decides whether the contour passes through it. If it does, the portion of the contour within the cell is plotted, and the method then goes on to examine the next cell.

While the first method would probably be the one used by a human being plotting a contour by hand, there are difficulties in adapting it for a computer. One is that it is hard to find a

By JOHN THORPE

starting point on a given contour.


Another is it is very easy to miss out parts of a contour, or even whole contours, if the one being followed passes outside the area being covered, or if there are two or more contours of the same height in different parts of the map.

The second method is therefore adapted in our program. This is illustrated in Box A.

The program assumes that measurements of the surface to be plotted have been made at all the corners of a rectangular grid. This assumption is exploited by making each of the rectangles defined by the grid into a separate cell for the purposes of plotting.

Landscape gardeners and engineers commonly measure the areas that they wish to plot on a rectangular grid, but this is not always the case for geographical maps or weather maps, where the triangulation points or weather stations tend to be much more randomly distributed.

The method described here can, however, be adapted to use cells which are irregular quadrilaterals or even triangles, which would allow even the most randomly distributed set of

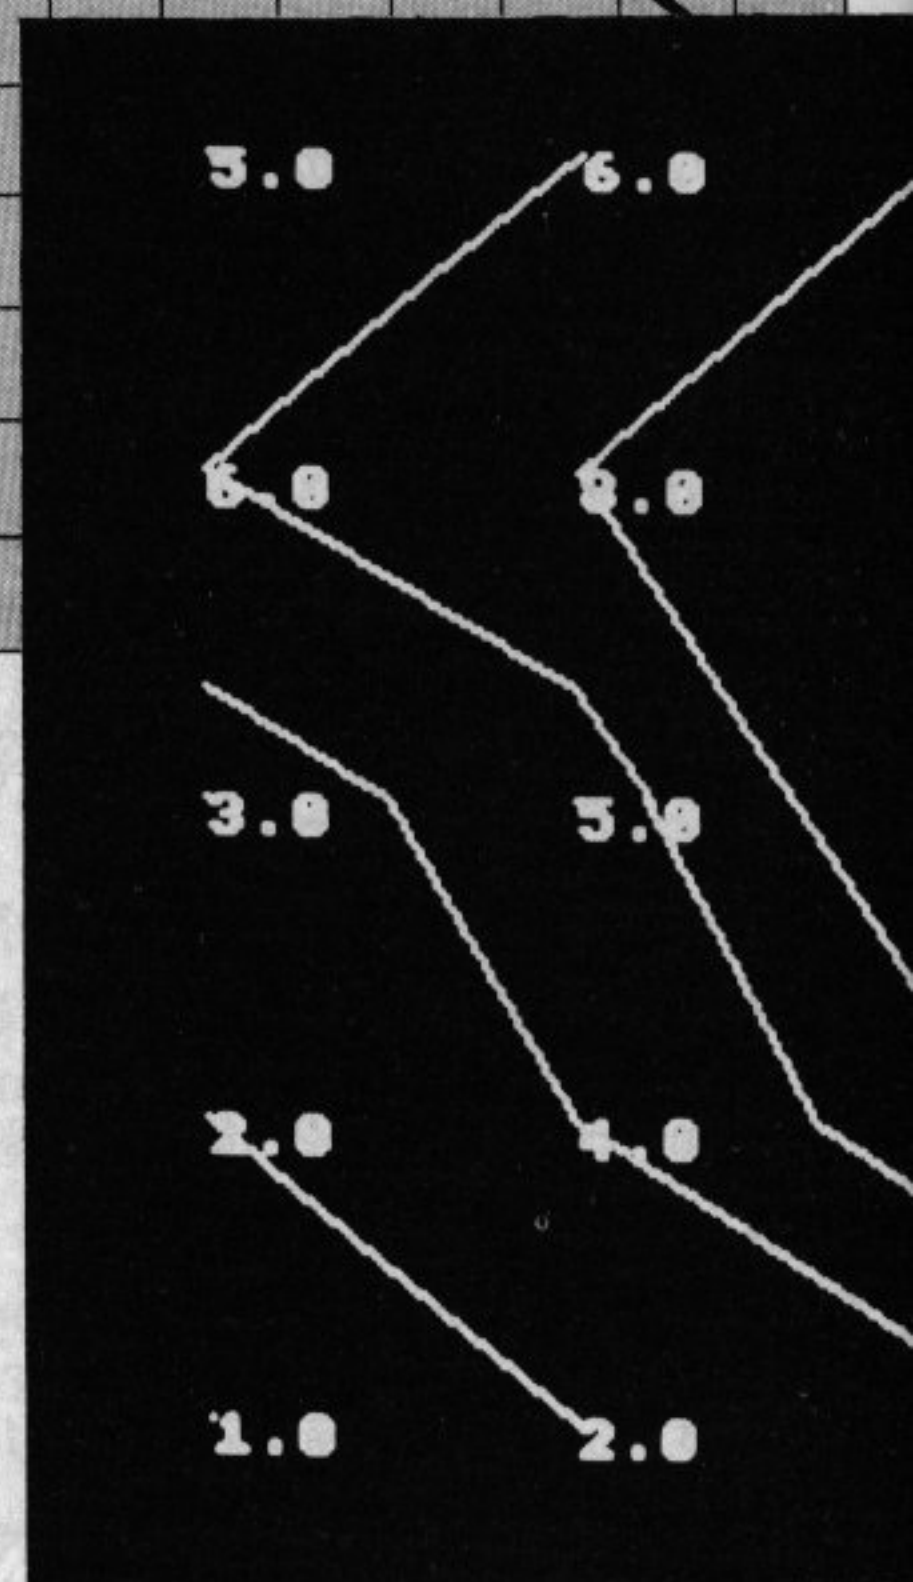


measurement points to be plotted.


When the method comes to a cell, its first task is to decide whether the contour that it is considering passes through the cell and, if so, where. This is done by looking at each side of the cell in turn and deciding whether the contour crosses it.

The contour crosses the edge of a cell if, and only if, one of the ends of that edge is higher than the contour and the other is lower. If both ends of the edge are the same height as the contour, then the contour passes directly along that edge.


Once the method has decided that the contour passes through the side of a cell it calculates an estimation of the position where the crossing occurs. This is done for all the sides of the cell

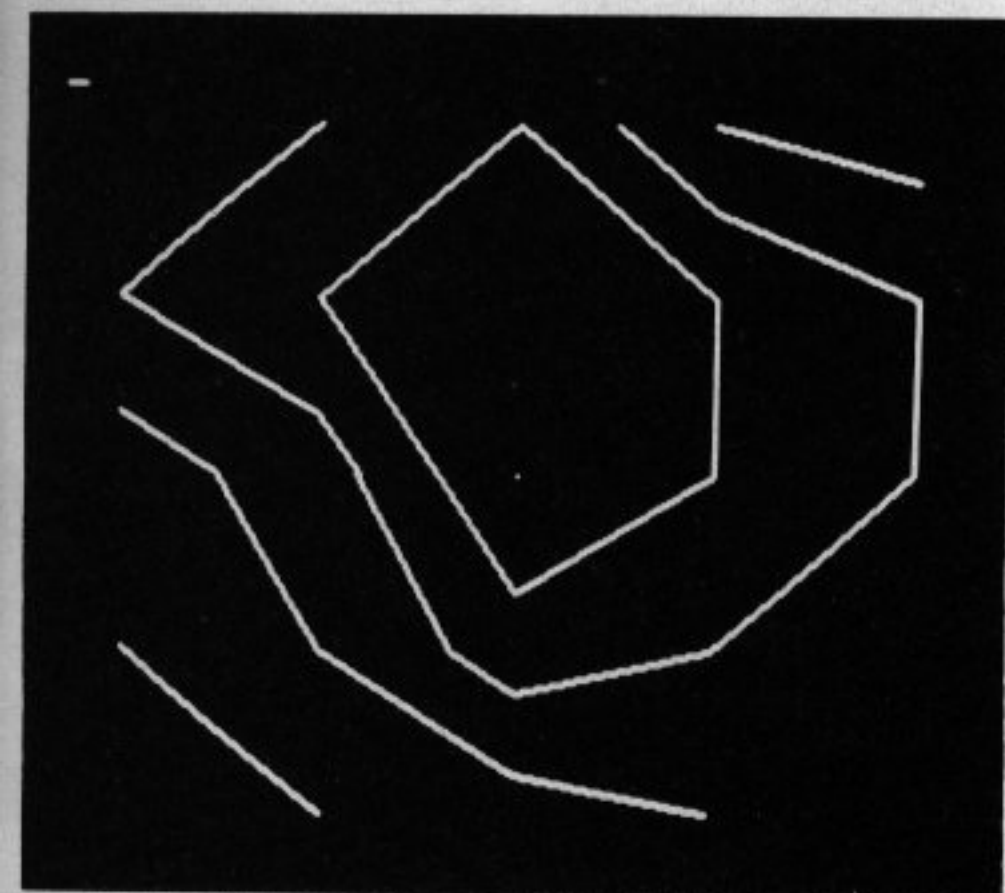

Output can be just the contours, as above, or with measurements displayed (below).

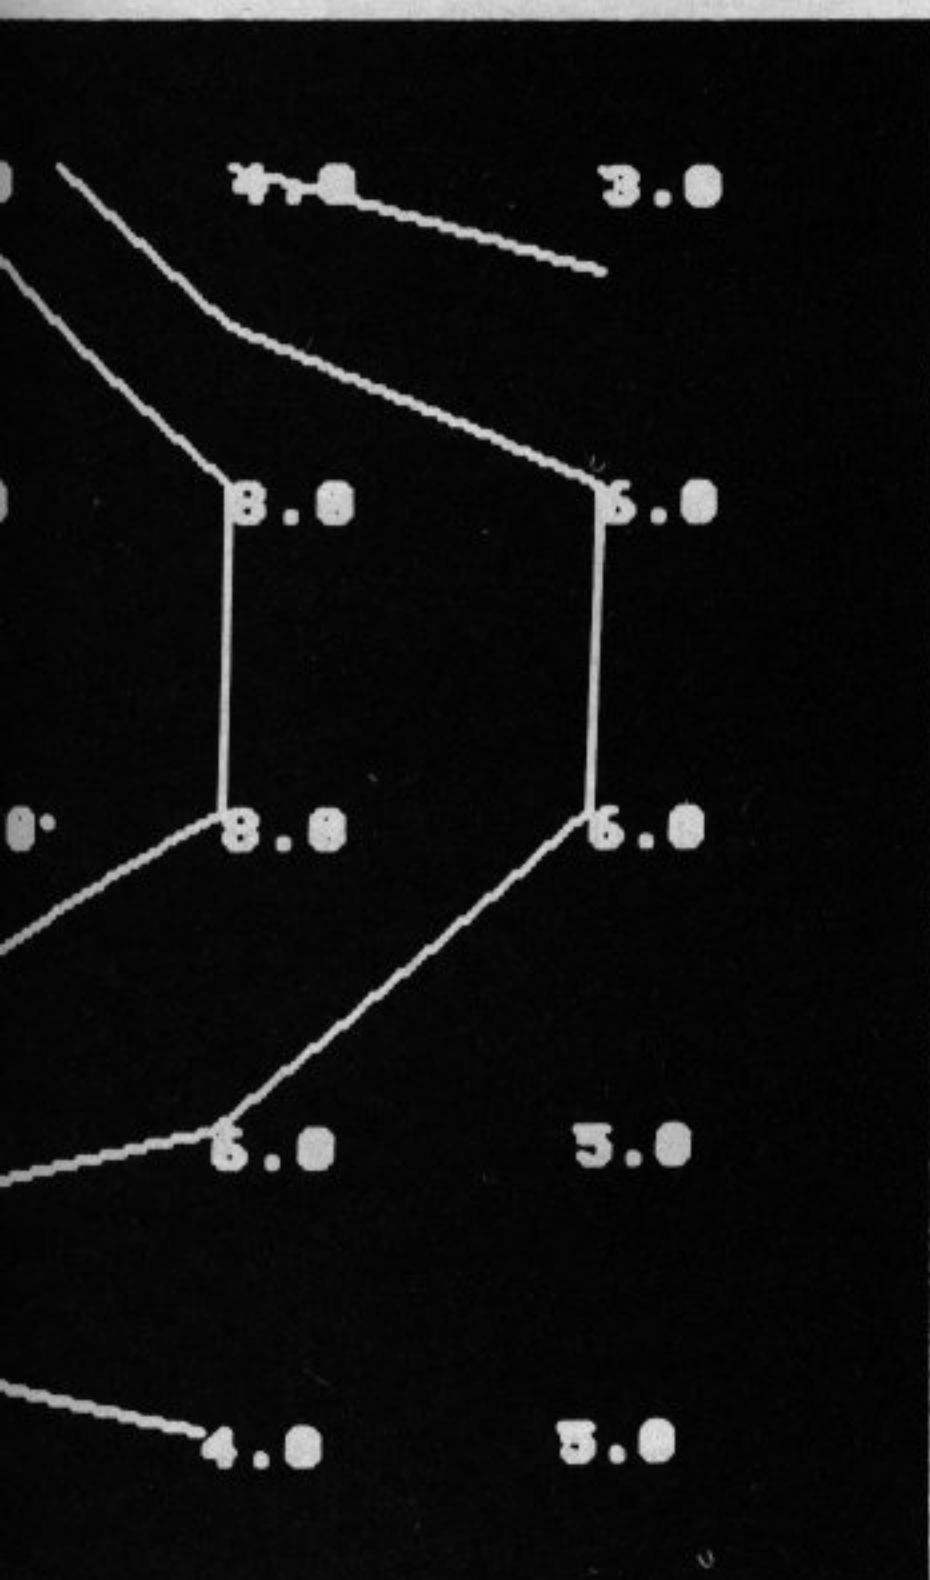

A: THE GENERAL ALGORITHM

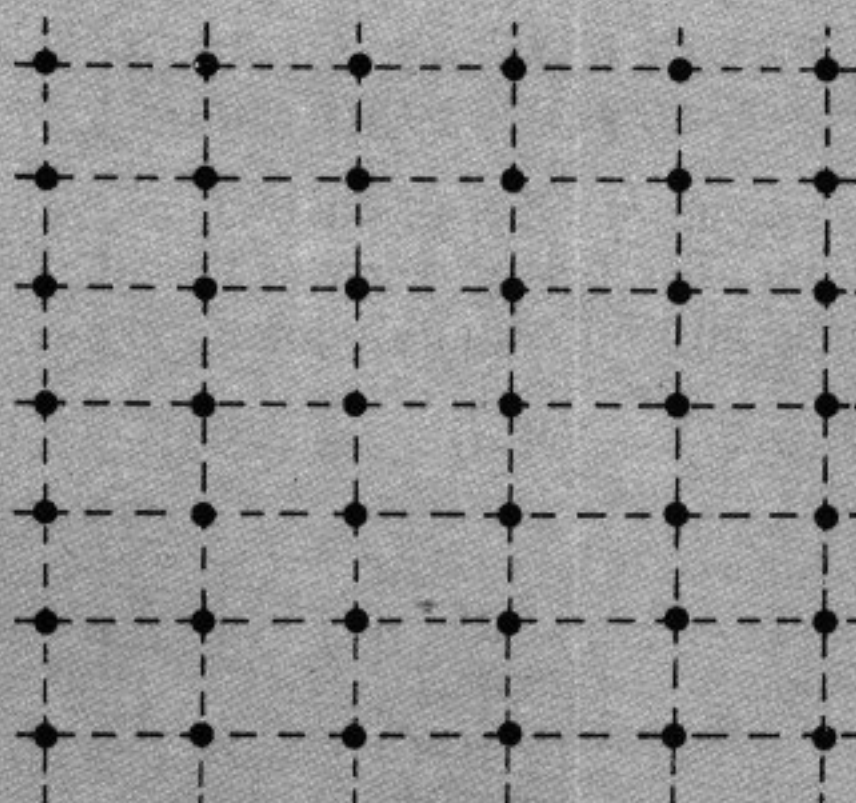

The rectangular grid of measured points. Each blob represents a point where the height of the surface is measured. The dotted lines divide the surface into cells.


For each contour, the algorithm looks at each cell in turn, starting at the bottom left hand corner and working across the rows, one by one. Each cell is referred to by the values of J% and K% at the bottom left hand corner.

Each cell is examined by PROCSQ, which decides whether the contour passes through any part of the cell, and, if it does, plots that part of the contour. The algorithm then passes on to examine the next cell.

B: THE OPERATION OF PROCSQ

At each cell the algorithm searches round the edges of the cell in an anti-clockwise direction. This is achieved by storing the corners of the cell in three one dimensional arrays (two containing the coordinates and one the height).

The bottom left hand corner is stored twice, as first and fifth (last) elements of all the arrays, so that each edge is represented by two consecutive corners in the arrays. For each edge, the procedure first decides whether it is crossed by the contour.

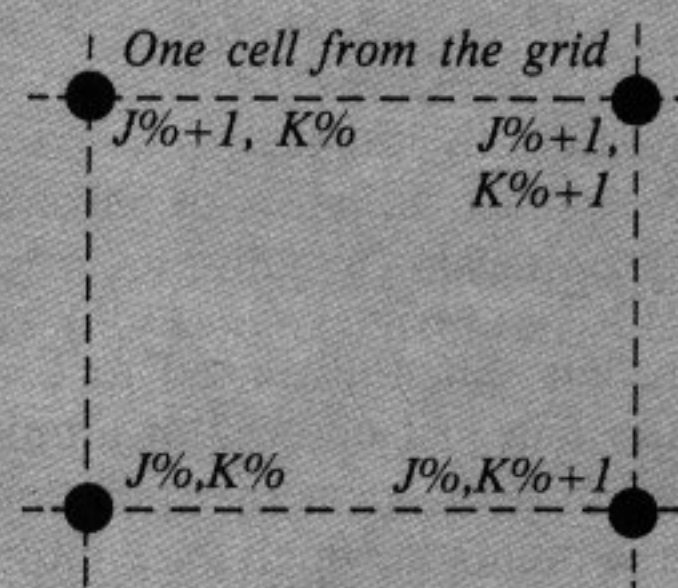

If a crossing is made, the position of that crossing is estimated and the coordinates are stored in two further arrays.


The last step of PROCSQ plots a set of straight lines joining all pairs of crossing points.

C: ESTIMATING A CROSSING POINT

The program uses a linear interpolation scheme to estimate where contours cross the edge of cells. This involves drawing a cross section of the edge of the cell, marking the heights of the measured points on it, and joining them together with a straight line.

The height of the contour is then marked on the diagram and the position where this intersects the line of the section is the estimated position of the contour.

If this is done, the position




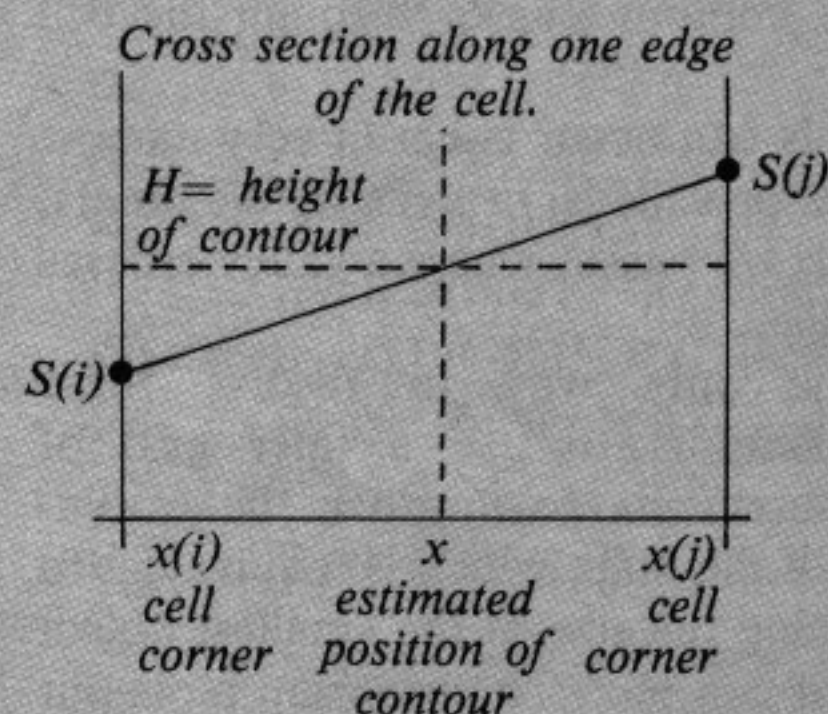


of the crossing point of the contour is given by the equation:


$$x = (H - S(i)) * (x(j) - x(i)) / (S(j) - S(i)) + x(i)$$

D: PROBLEMS AT SADDLE POINTS AND NARROW PEAKS OR VALLEYS

Problems can occur at either of the two cases of a saddle point or a narrow contour. The first problem is that the contour at a saddle point could be any one of the patterns shown below.

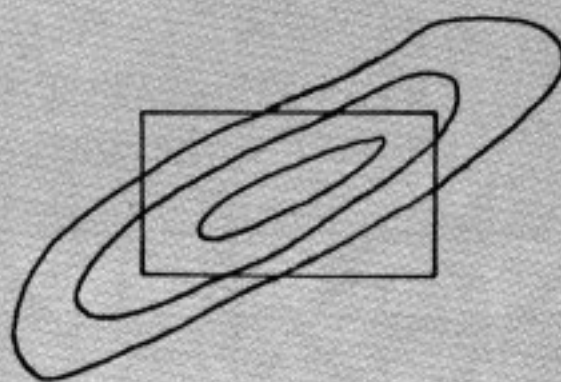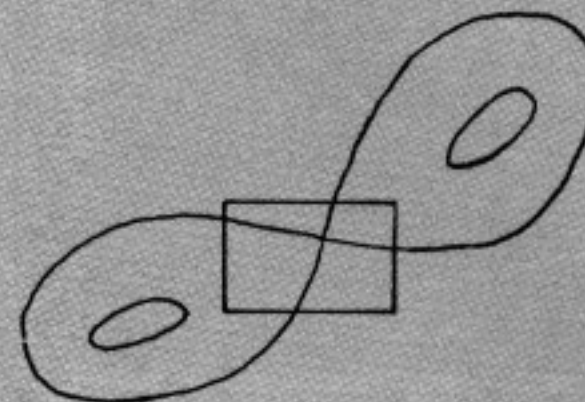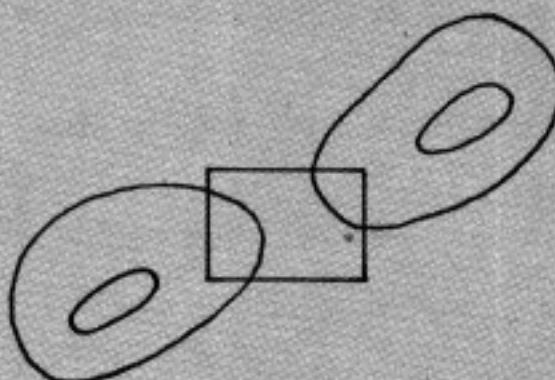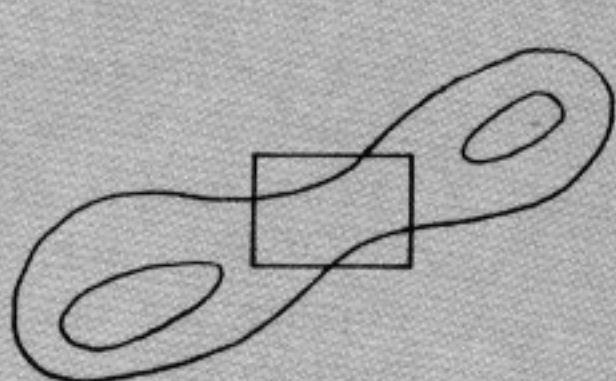

In the case of a narrow hill or valley the contours may follow the pattern shown left. In either case, the computer cannot distinguish which of the four patterns is intended and will plot a pattern like the one on the right.

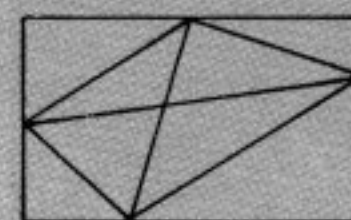

From Page 77

to the surface, but these need to consider more than just one cell at a time. The program uses linear interpolation.

Once the points at which the contour line crosses the edges of the cell have been estimated, all that remains to be done is to join them together with a suitable curve.

The program takes the simplest course (again) and uses a straight line, but it is possible to use curves which produce smoother contours with no sharp corners.

The only remaining problem is that of sorting out the connections when two different contours of the same height pass through a cell, or where the same contour passes through the cell twice.

This can occur either in very narrow ridges or valleys, or near saddle points, which are passes where a valley crosses a ridge.

The only way to resolve these problems is to use a finer grid of measurements to improve the resolution of the map, which is equivalent to reducing the size of the smallest object that it can plot. The program plots out all possible sets of contours if an ambiguity like this occurs.

Once the contour has been plotted in a single cell the method moves on and repeats the process in the next one. This process continues until all cells

have been examined, which guarantees that all the contours of the height under consideration have been plotted.

The program then goes on to the next height and repeats the process until all the contours have been completely plotted.

Operating Instructions

THE program should operate adequately on both models of the BBC Micro. If you wish to save memory remove the spaces from in front of the Basic statements. Run the program in the usual way by typing RUN.

The first prompt asks for an entry of 0, 1, or 2. If 2 is entered a single point will be plotted at every grid point on the map, accompanied by the height of that point. If a 1 is entered, the points are plotted without the heights, and if 0 is entered neither is plotted.

The program then asks for the number of rows (x values) and columns (y values) in the data, and the number of contours.

If the size of the problem entered at this stage is too large, a message will be printed and the program will ask for the number of x and y values again. Otherwise the program changes to MODE 4 and asks for values of the x co-ordinate followed by values of the y co-ordinate. A list giving all the values used (one per line) should be entered for each co-ordinate direction.

The program then prints out a set of

pairs of co-ordinates, one for each measured point, going along each row in turn, and asks for the height at that point. The x-co-ordinate is given in the first column and the y-co-ordinate in the second column. When the entry of this is complete the program asks whether there are any errors. A single letter answer is sufficient for this entry, but a full word will also be accepted.

If there is an error, enter Y or Yes and the computer will ask which row and column the error is at. The program prints the co-ordinates corresponding to this point when the row and column numbers have been entered, and asks if they are correct.

If they are not correct the program returns to asking for row and column. If the co-ordinates are correct, the program asks for the height and then asks if there are any more errors.


The program then asks for the height of each contour. These need not be sorted into order before they are entered.

The program finally plots the contour map.

NOTE that the program can be stopped at any time by pressing ESCAPE.

The program must be interrupted by pressing ESCAPE after the map has been plotted.

Co-ordinates must be entered in ascending order, but contours can be entered in any order.

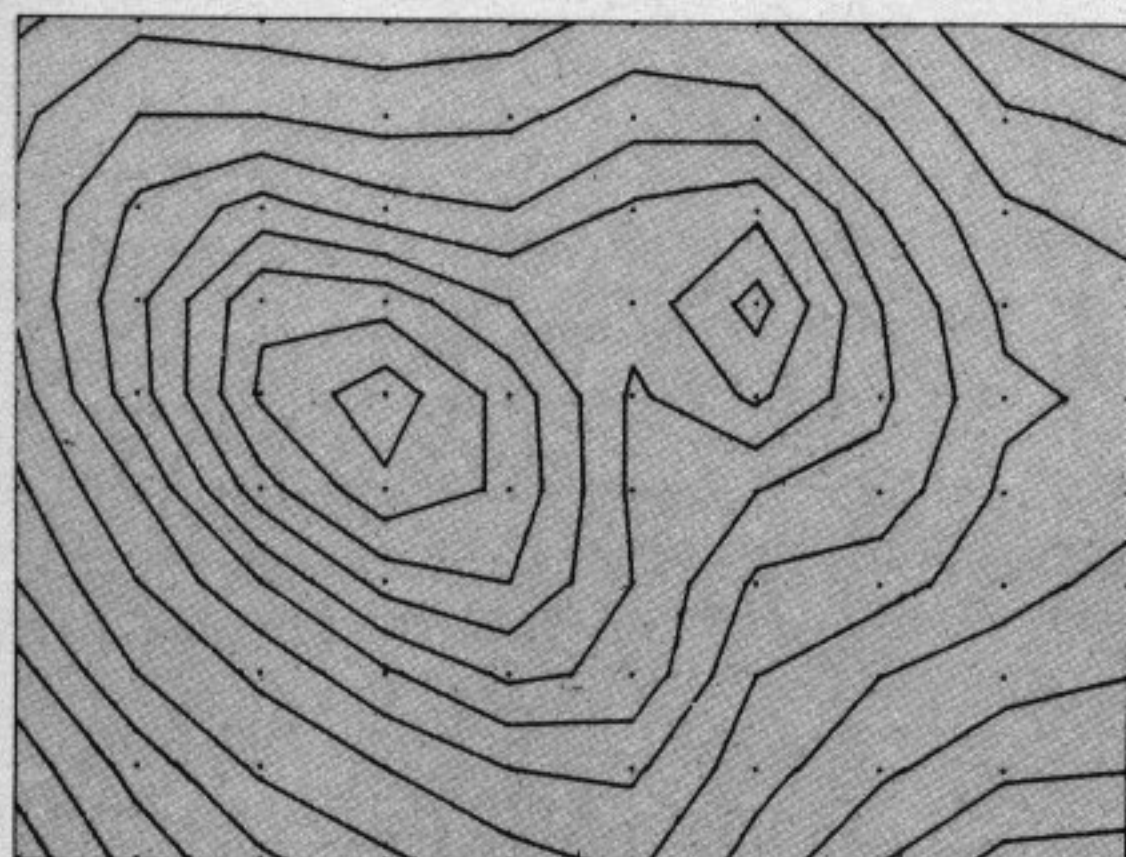

These contours are plotted at steps of 50 ft, starting at 150 ft and increasing to 800 ft, for the following test data:

	x										
	0	100	200	300	400	500	600	700	800	900	
0	170	280	340	390	430	460	380	300	230	220	
100	220	320	410	450	500	510	420	360	310	300	
200	280	400	460	540	610	590	450	400	370	350	
300	350	450	550	670	700	600	490	470	420	380	
400	390	500	680	790	740	590	550	530	440	420	
500	430	580	760	830	730	590	660	560	460	440	
600	460	590	740	730	650	620	720	550	440	420	
700	460	560	620	570	550	610	640	500	410	380	
800	440	500	500	480	490	530	520	450	360	340	
900	390	440	430	420	430	470	460	390	300	250	

VARIABLES

Arrays

W(J%,K%) – Height of surface at measured point in row J%, column K%

X(K%) – X coordinate of column K%

Y(J%) – Y coordinate of row J%

HO(I%) – Height of contour I%

X1(J1%) – X coordinate of corner J1% of current cell

Y1(J1%) – Y coordinate of corner J1% of current cell

S(J1%) – Height of corner J1% of current cell

X2(J) – X coordinate of point where contour crosses cell wall J

Y2(J) – Y coordinate of point where contour crosses cell wall J.

Scalars

NX% – Number of columns

NY% – Number of rows

NC% – Number of contours

MX% – One less than NX% = (NX% - 1)

MY% – One less than NY% = (NY% - 1)

XA, XO – Constants needed to scale the display area x-axis

YA, YO – Constants needed to scale the display area y-axis

B% – Variable to control printing of measured points

I%, J%, K%, J1%, K1% – Loop control variables

Contour listing

```

10REM *****
20REM ** CONTOUR PLOTTER **
30REM ** J.C. THORPE **
35REM ** (C) 25/9/83 **
40REM *****
50
60REM ** SET UP ARR
AYS **
70 MODE 7
80 PRINT TAB(10,4)"CONTOUR PLOTTE
R"
85PRINT"ENTER:-"
90 PRINT " 2 TO PLOT HEIGHTS
AT MEASURED POINTS"
100 PRINT " 1 TO PLOT MEASURE
D POINTS"
110 INPUT " 0 TO PLOT NEITHER
",B%
120 PRINTTAB(0,17)"HOW MANY X VALU
ES ";
130 INPUT NX%
140 INPUT "HOW MANY Y VALUES ",NY
%
150 INPUT "HOW MANY CONTOURS",NC%

160 ON ERROR GOTO 900
170 MODE 4
180 PRINT:PRINT
190 DIM W(NY%,NX%),X(NX%),Y(NY%),H
0(NC%),X1(5),Y1(5),S(5),X2(4),Y2(4)
200
210REM ** ENTER DATA
**
220REM * COORDINATE
S *
230 PRINT "ENTER VALUES OF X COORD
INATE"
240 FOR K%=1 TO NX%
250 INPUT X(K%)
260 NEXT K%
270
280 PRINT "ENTER VALUES OF Y COORD
INATE"
290 FOR J%=1 TO NY%
300 INPUT Y(J%)
310 NEXT J%
320
330REM * HEIGHTS AT
GRID POINTS *
340 PRINT "FOR EACH POINT ENTER HE
IGHT"
350 PRINT "X","Y","HEIGHT"
360 FOR J%=1 TO NY%
370 FOR K%=1 TO NX%
380 PRINT;X(K%);Y(J%)," ";
390 INPUT W(J%,K%)
400 NEXT K%
410 NEXT J%
420
430 INPUT "ANY ERRORS ",A$
440 IF LEFT$(A$,1)="N" THEN 560
450 IF LEFT$(A$,1)<>"Y" THEN 430
460 INPUT "WHICH? Enter row,colum
n",J%,K%
470 PRINT "X = ";X(K%);"Y = ";Y(J%
)
480 INPUT "OK ",A$
490 IF LEFT$(A$,1)="N" THEN 460
500 IF LEFT$(A$,1)<>"Y" THEN 480
510 INPUT "ENTER HEIGHT ",W(J%,K%)
520 INPUT "ANY MORE ERRORS",A$

```


Contour listing

From Page 79

```

530      GOTO 440
540
550REM      *          HEIGHTS OF
CONTOURS      *
560      PRINT "ENTER HEIGHT OF EACH CO
NTOUR"
570      PRINT "CONTOUR","HEIGHT"
580      FOR I%=1 TO NC%
590          PRINT I%,;
600          INPUT H0(I%)
610      NEXT I%
620
630REM      **          CONTOUR PL
OT      **
640      PROCINIT(X(1),X(NX%),Y(1),Y(NY
%))
650      CLS
660      MX%=NX%-1
670      MY%=NY%-1
680      FOR I%=1 TO NC%
690          FOR J%=1 TO MY%
700              FOR K%=1 TO MX%
710                  PROCSQ(H0(I%),J%,K%)
720              NEXT K%
730          NEXT J%
740      NEXT I%
750
760REM      **          PRINT POIN
TS/HEIGHTS      **
770      IF B%=0 THEN B70
780      @%=&00020101
790      VDU 5
800      FOR J%=1 TO NY%
810          FOR K%=1 TO NX%
820              PROCPOINT(X(K%),Y(J%))
830              IF B%>1 THEN PRINT W(J%,
K%)
840          NEXT K%
850      NEXT J%
860
870      REPEAT UNTIL FALSE
880
890REM      **          ERROR HAND
LING      **
900      IF ERR=11 THEN 940
910      IF ERR=17 THEN 930
920      PRINT "ERROR "ERR:REPORT:PRINT
" AT LINE "ERL
930      VDU 4:@%=10:END
940      MODE 7
950      PRINT "SIZE OF PROBLEM TOO LAR
GE"
960      PRINT "CONTINUE WITH SMALLER G
RID OR FEWER CONTOURS"
970      GOTO 80
980
990REM      **          MOVE ON PLOT
TING PLANE      **
1000     DEF PROCMOVE(X,Y)
1010         X=X*XA+X0
1020         Y=Y*YA+Y0
1030         MOVE X,Y
1040     ENDPROC
1050
1060REM      **          DRAW ON PLO
TTING PLANE      **
1070     DEF PROCDRAW(X,Y)
1080         X=X*XA+X0
1090         Y=Y*YA+Y0
1100         DRAW X,Y
1110     ENDPROC
1120
1130REM      **          PLOT SINGLE
SQUARE      **
1140     DEF PROCSQ(H,J%,K%)
1150
1160REM      **          SET UP CELL
CORNERS      **
1170         X1(1)=X(K%) :Y1(1)=Y(J%) :S(
1)=W(J%,K%)
1180         X1(2)=X(K%+1):Y1(2)=Y(J%) :S(
2)=W(J%,K%+1)
1190         X1(3)=X1(2) :Y1(3)=Y(J%+1):S(
3)=W(J%+1,K%+1)
1200         X1(4)=X(K%) :Y1(4)=Y1(3) :S(
4)=W(J%+1,K%)
1210         X1(5)=X(K%) :Y1(5)=Y(J%) :S(
5)=W(J%,K%)
1220
1230REM      **          FIND ENDS OF CONT
OUR SEGMENTS      **
1240         FOR J1%=1 TO 4
1250             X2(J1%)=-1
1260             K1%=J1%+1
1270             IF S(J1%)<=H AND S(K1%)>H T
HEN 1330
1280             IF S(J1%)>=H AND S(K1%)<H T
HEN 1330
1290             IF S(J1%)=H AND S(K1%)=H T
HEN 1430
1300             GOTO 1460
1310
1320REM      **          LINE FROM J
1 TO K1      **
1330             IF X1(J1%)=X1(K1%) THEN 138
0
1340             Y2(J1%)=Y1(J1%)
1350             X2(J1%)=(H-S(J1%))*(X1(K1
%)-X1(J1%))/(S(K1%)-S(J1%)) + X1(J1%)
1360             GOTO 1460
1370
1380             X2(J1%)=X1(J1%)
1390             Y2(J1%)=(H-S(J1%))*(Y1(K1
%)-Y1(J1%))/(S(K1%)-S(J1%)) + Y1(J1%)
1400             GOTO 1460
1410
1420REM      **          LINE ALONG
CELL EDGE      **
1430             PROCMOVE(X1(J1%),Y1(J1%))
1440             PROCDRAW(X1(K1%),Y1(K1%))
1450
1460         NEXT J1%
1470
1480REM      **          DRAW CONTOU
R LINES      **
1490         FOR J1%=1 TO 3
1500             IF X2(J1%)<0 THEN 1560
1510             FOR K1%=J1% TO 4
1520                 IF X2(K1%)<0 THEN 1550
1530                 PROCMOVE(X2(J1%),Y2(J1%
))
1540                 PROCDRAW(X2(K1%),Y2(K1%
))
1550             NEXT K1%
1560         NEXT J1%
1570
1580     ENDPROC
1590
1600REM      **          INITIALISE PLOT
TING PLANE      **
1610     DEF PROCINIT(X1,X2,Y1,Y2)
1620         XA=1100/(X2-X1):X0=-X1*XA+9
0
1630         YA= 900/(Y2-Y1):Y0=-Y1*YA+4
0
1640     ENDPROC
1650
1660REM      **          PLOT ONE P
OINT      **
1670     DEF PROCPOINT(X,Y)
1680         X=X*XA+X0
1690         Y=Y*YA+Y0
1700         PLOT 69,X,Y
1710     ENDPROC

```


FORMAT YOUR PROGRAM LISTINGS

THE need for this program arose while I was trying to decipher some program listings which I hadn't looked at for some time. Even with the LIST option on, long program "lines" often break up keywords and wrap over onto the next line below the line numbers, making the listing look very untidy and difficult to follow.

The program following is an attempt to tidy up these listings. It will:

- Divide up multi-statement lines.
- Not split keywords.
- Insert spaces after keywords unless this alters the meaning of the statement, for example, after FN there must be no space before the function name.
- Indent statements if the line overflows onto the next.
- Page a printer and write a heading.
- Work with Basic programs saved on both disc and cassette filing systems.

JIM NOTMAN
shows you how

always the same length, RE-NUMBERing is made easier (see Figure 1).

The other characters will have Ascii values 32 to 126, representing variables and expressions.

JUDGING from my mail bag, the formatting program in the July 1983 *The Micro User* certainly created some interest. My thanks to all of you who wrote in, some with suggestions to make the program more useful.

At the moment the program will print a space after the RND keyword. To prevent this line 670 needs to be altered to:

```
670 FOR IX=0 TO 127
  :IF NOT (IX=114 OR IX=36 OR IX=51
  OR RIGHT$(T$(IX),1)="(")
  THEN T$(IX)=T$(IX)+" "
```

If the escape key is pressed during printing the printer is still enabled. This line will also close all open files and handle any errors.

```
15 ON ERROR VDU 3,13
  :CLOSE #0
  :REPORT
  :PRINT "On line ":ERL
  :END
```

An extra line (645) and alterations to lines 650 and 660 will allow the

JIM NOTMAN updates his formatter

program to be used in both Basic1 and Basic 2 machines.

```
645 IF ?&8006=&60
  THEN A%=&8071
  :E%=&836B
  ELSE A%=&806D
  :E%=&8358
650 W$=STRING$(10," ")
  :REPEAT
  :W$=""
  :REPEAT
  :W$=W$+CHR$(?A%)
  :A%=A%+1
  :UNTIL ?A%>7F
660 T$(?A%-&80)=W$
  :A%=A%+2
  :UNTIL A%>E%
```

A number of readers wanted the program to be able to deal with control characters in a program line and with

teletext characters.

In each case it will print the control character number enclosed by <brackets>.

A new procedure is defined:

```
1070 DEF PROCcontrol
1080 IF COUNT >MAX-4
  THEN PROCnextline
1090 IF COUNT <6
  THEN PRINT TAB(6);
1100 PRINT "<";C%>";"
1110 ENDPROC
```

If you have a printer which can underline characters this will make the control codes more noticeable. The next two lines work with the FX-80.

```
1095 VDU1,27,1,45,1,48
  :REM underline on
1105 VDU1,27,1,45,1,49
  :REM underline off
```

To install this new procedure the following lines are changed:

```
300 IF C%<32 OR C%>127
  THEN PROCcontrol
  :GOTO 340
910 IF COUNT >MAX-5 AND (C%=32
  OR C%>127)
  THEN PROCnextline
930 IF C%<32 OR C%>127
  THEN PROCcontrol
  ELSE PRINT CHR$(C%);
```

'?Block' error was another problem some readers experienced when using

FURTHER FORMATTING

From Page 81

the formatter with the cassette filing system.

This is usually due to trying to read a file without motor control or if there is motor control the cassette unit is slow at stopping and starting.

When listening to a tape with a program or data on it, you will hear a series of buzzes (blocks of information) separated by tones (the interblock gap).

Information is loaded into the BBC a block at a time, the cassette relay being switched off at the end of each block.

The computer then deals with that information before switching the relay back on for the next block. On many Beebs you can hear this relay clicking.

Normally when loading or saving programs the time between switching off and on is very short.

However with data handling it will

take longer to deal with each block.

If your tape unit has no motor control it will continue to wind on after the first block, so that when the Beeb is ready for more information the tape is already partly through the next block, hence the '?Block' error.

So if you have no motor control what can you do?

- If you can rig your cassette so you can hear it playing back while loading data and there is pause control on your unit, you could press the pause button for a few seconds during the tone (the interblock gap).

This is the simplest way, but very tedious in practice.

- Alter the interblock tone gap. According to the User Guide, page 398, the interblock gap can only be changed with data files, not with program files.

At startup the interblock gap is set

for 2.5 seconds with data files. In some cases this is adequate, but when longer gaps are needed use *OPT3,x (where x is the gap in 10ths of a second).

Try *OPT3,60 here. It is easy to save the program in data file format using the following commands in one line.

X=OPENOUT ("PROGNAME"):
FOR I%=PAGE TO TOP
:BPUT#X,?I%:NEXT:CLOSE#X

When using this method make sure there is nothing to delay the program such as screen paging. Also if using a slow printer the interblock gap should be made longer.

- Have your cassette unit altered to incorporate remote motor control.
- Get a cassette unit which has motor control.
- Decide you've had enough of cassettes and get a disc drive – the ideal solution, if you can afford it.

Electronequip

(Authorised BBC Dealer, and service centre)

SPECIAL OFFERS

FREE CASSETTE RECORDER

With every Model B ordered a free cassette recorder will be given (while stocks last).

3" MICRO DISC DRIVE

True floppy disc, very fast. 80K formatted capacity. Disc drive and interface. Cost only £189.95. Drive cost £129.95

ATARI SPECIAL OFFER

Free Atari game cartridge with every computer purchased. Prices 400 – £149.99. 800 – £299.99

SPARKJET PRINTER OFFER

New quiet printer for BBC. Friction and tractor feed 80cps.

Normal £424.35. Only £343.85


TORCH Z80 DISC PACK

800K Dual Disc Drive plus Z80 processor with CMP compatible operating system. Cost £897.00

Send SAE for details on any of the above items.

BBC 2 BBC Model B Micro Computer	£399.00
BBC 3 BBC Model A Micro with 32K	£333.50
BBC 4 BBC Model A Micro with 32K and VIA	£339.50
BBC 5 BBC Model B with Disc Interface	£469.00
BBC 6 BBC Model A with Econet Interface	£356.00
BBC 7 BBC Model B with Econet Interface	£456.00
BBC 8 BBC Model B with Disc & Econet Interface	£526.00
BBC 21 BBC Model A to B Upgrade	£80.50
BBC 28 Econet Upgrade to BBC	£92.00
BBC 27 Disc Upgrade for BBC B (inc. fitting)	£92.00
BBC 30 BBC 14" Colour Monitor	£287.50
BBC 33 Sanyo SM12N Green Monitor 15MHz	£90.85
BBC 34 Karga K12G Green Monitor 18MHz	£113.85
BBC 35 Karga K12A 12" Orange Monitor	£129.95
BBC 41 BBC Single 100K 5¼" Disc Drive (AND01)	£265.00
BBC 43 BBC Dual 800K 5¼" Disc Drive (AND02)	£803.85
BBC 44 Single Disc Drive (100K) for BBC (Teac)	£211.60
BBC 45 Single Disc Drive (200K) for BBC (Teac)	£269.10
BBC 46 Single Disc Drive (400K) for BBC (Teac)	£349.60
BBC 47 Dual Disc Drive (200K) for BBC (Teac)	£417.45
BBC 48 Dual Disc Drive (400K) for BBC (Teac)	£532.45
BBC 49 Dual Disc Drive (800K) for BBC (Teac)	£693.45
BBC 50 Epson FX-80 160cps Printer + Prop. spacing	£449.65
ATM 2 Acorn Atom assembled 12K ram	£99.95
ATM 26 Atom New Power Supply 1.8A	£9.66
ATM 21 Floating Point ROM for Atom	£21.85

Large stocks of software for BBC and Atom, Business, Games, Educational. Send for comprehensive lists. All printers, disc drives supplied with all cables.

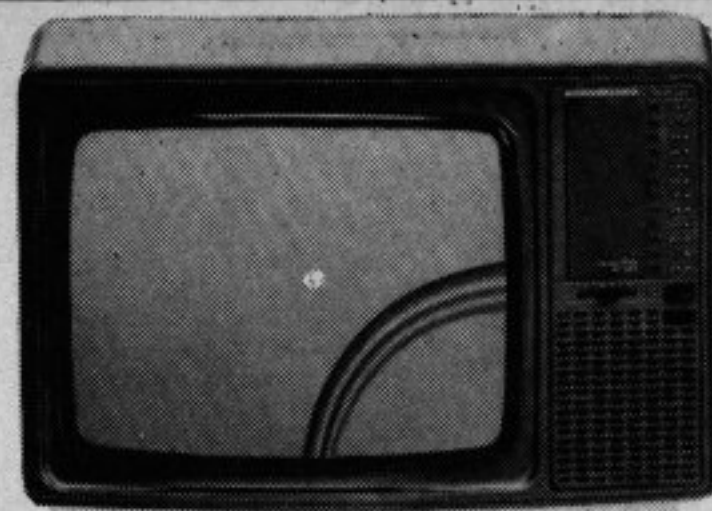

14" Colour Portable TV/Monitor

This TV/Monitor is not a modified television as many TV/Monitors are, but a 14" TV/Monitor which has been designed to perform both functions. It has RGB and Composite video and sound. An RGB cable for a BBC is supplied as standard.

Cost £259.90

With Remote Control £279.45

Trade enquiries welcome

All Upgrades etc., are fitted free of charge and the computer fully re-tested. Access and Barclaycard welcome.



**ACORN
COMPUTER**

Electronequip

BBC

36-38 West Street, Fareham, Hants

(0329) 230670

SPECIAL
OFFER FROM
THE MICRO USER

The Advanced User Guide


The essential companion
for the BBC Micro.

Featured in its 512
information packed pages
are

- ★ the BASIC Assembler
- ★ 6502 machine code
reference section
- ★ complete descriptions of
all FX calls
- ★ BBC memory usage and
vectors explained
- ★ full interfacing details for
the user port, tube,
analogue port, 1 MHz bus
- ★ paged ROMs explained
- ★ and lots, lots more

With many examples to
illustrate the text, this guide
is the indispensable
reference work for the
serious BBC micro
programmer.

THE ADVANCED USER GUIDE FOR THE BBC MICRO

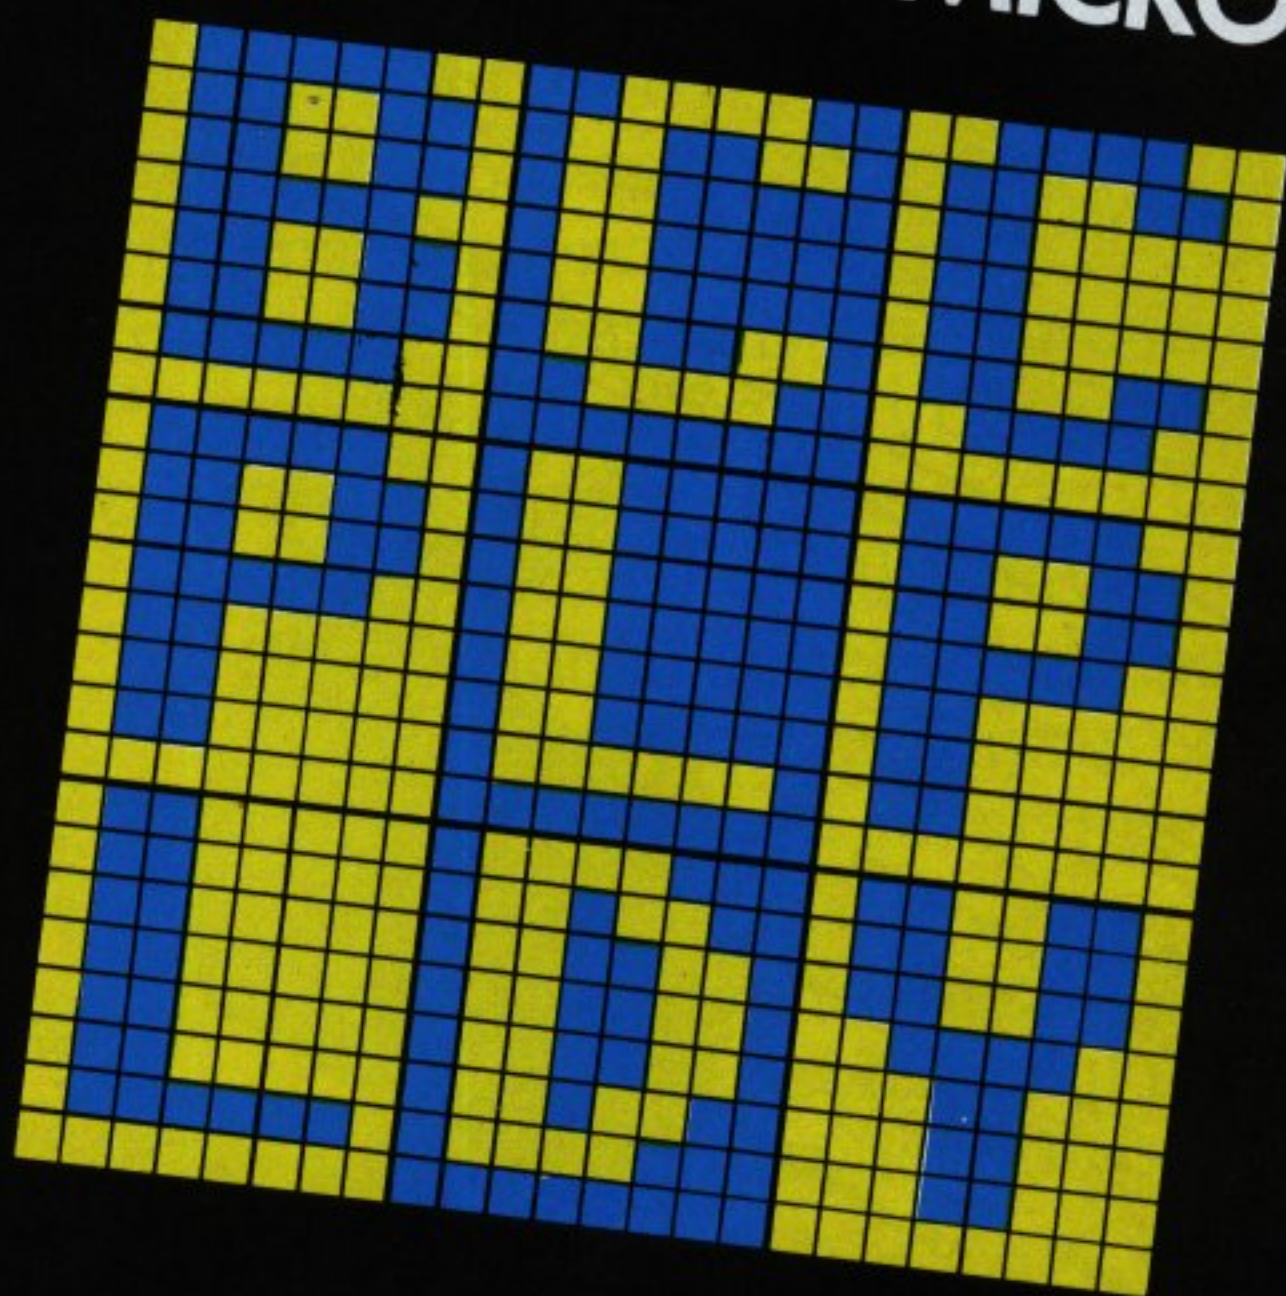

BRAY, DICKENS & HOLMES

ONLY
£12.95
(plus p&p)

net 800 ew channel

Please send me all the information on Micronet 800, the modems and
software packs I will need to connect to the service, and a subscriber's
application form.

Name _____


Address _____

Tel: _____

Post to Micronet 800, Scriptor Court, 155 Farringdon Road,
London EC1R 3AD. Tel: 01-278 3143.

BBC 8

One of the many faces on Prestel.

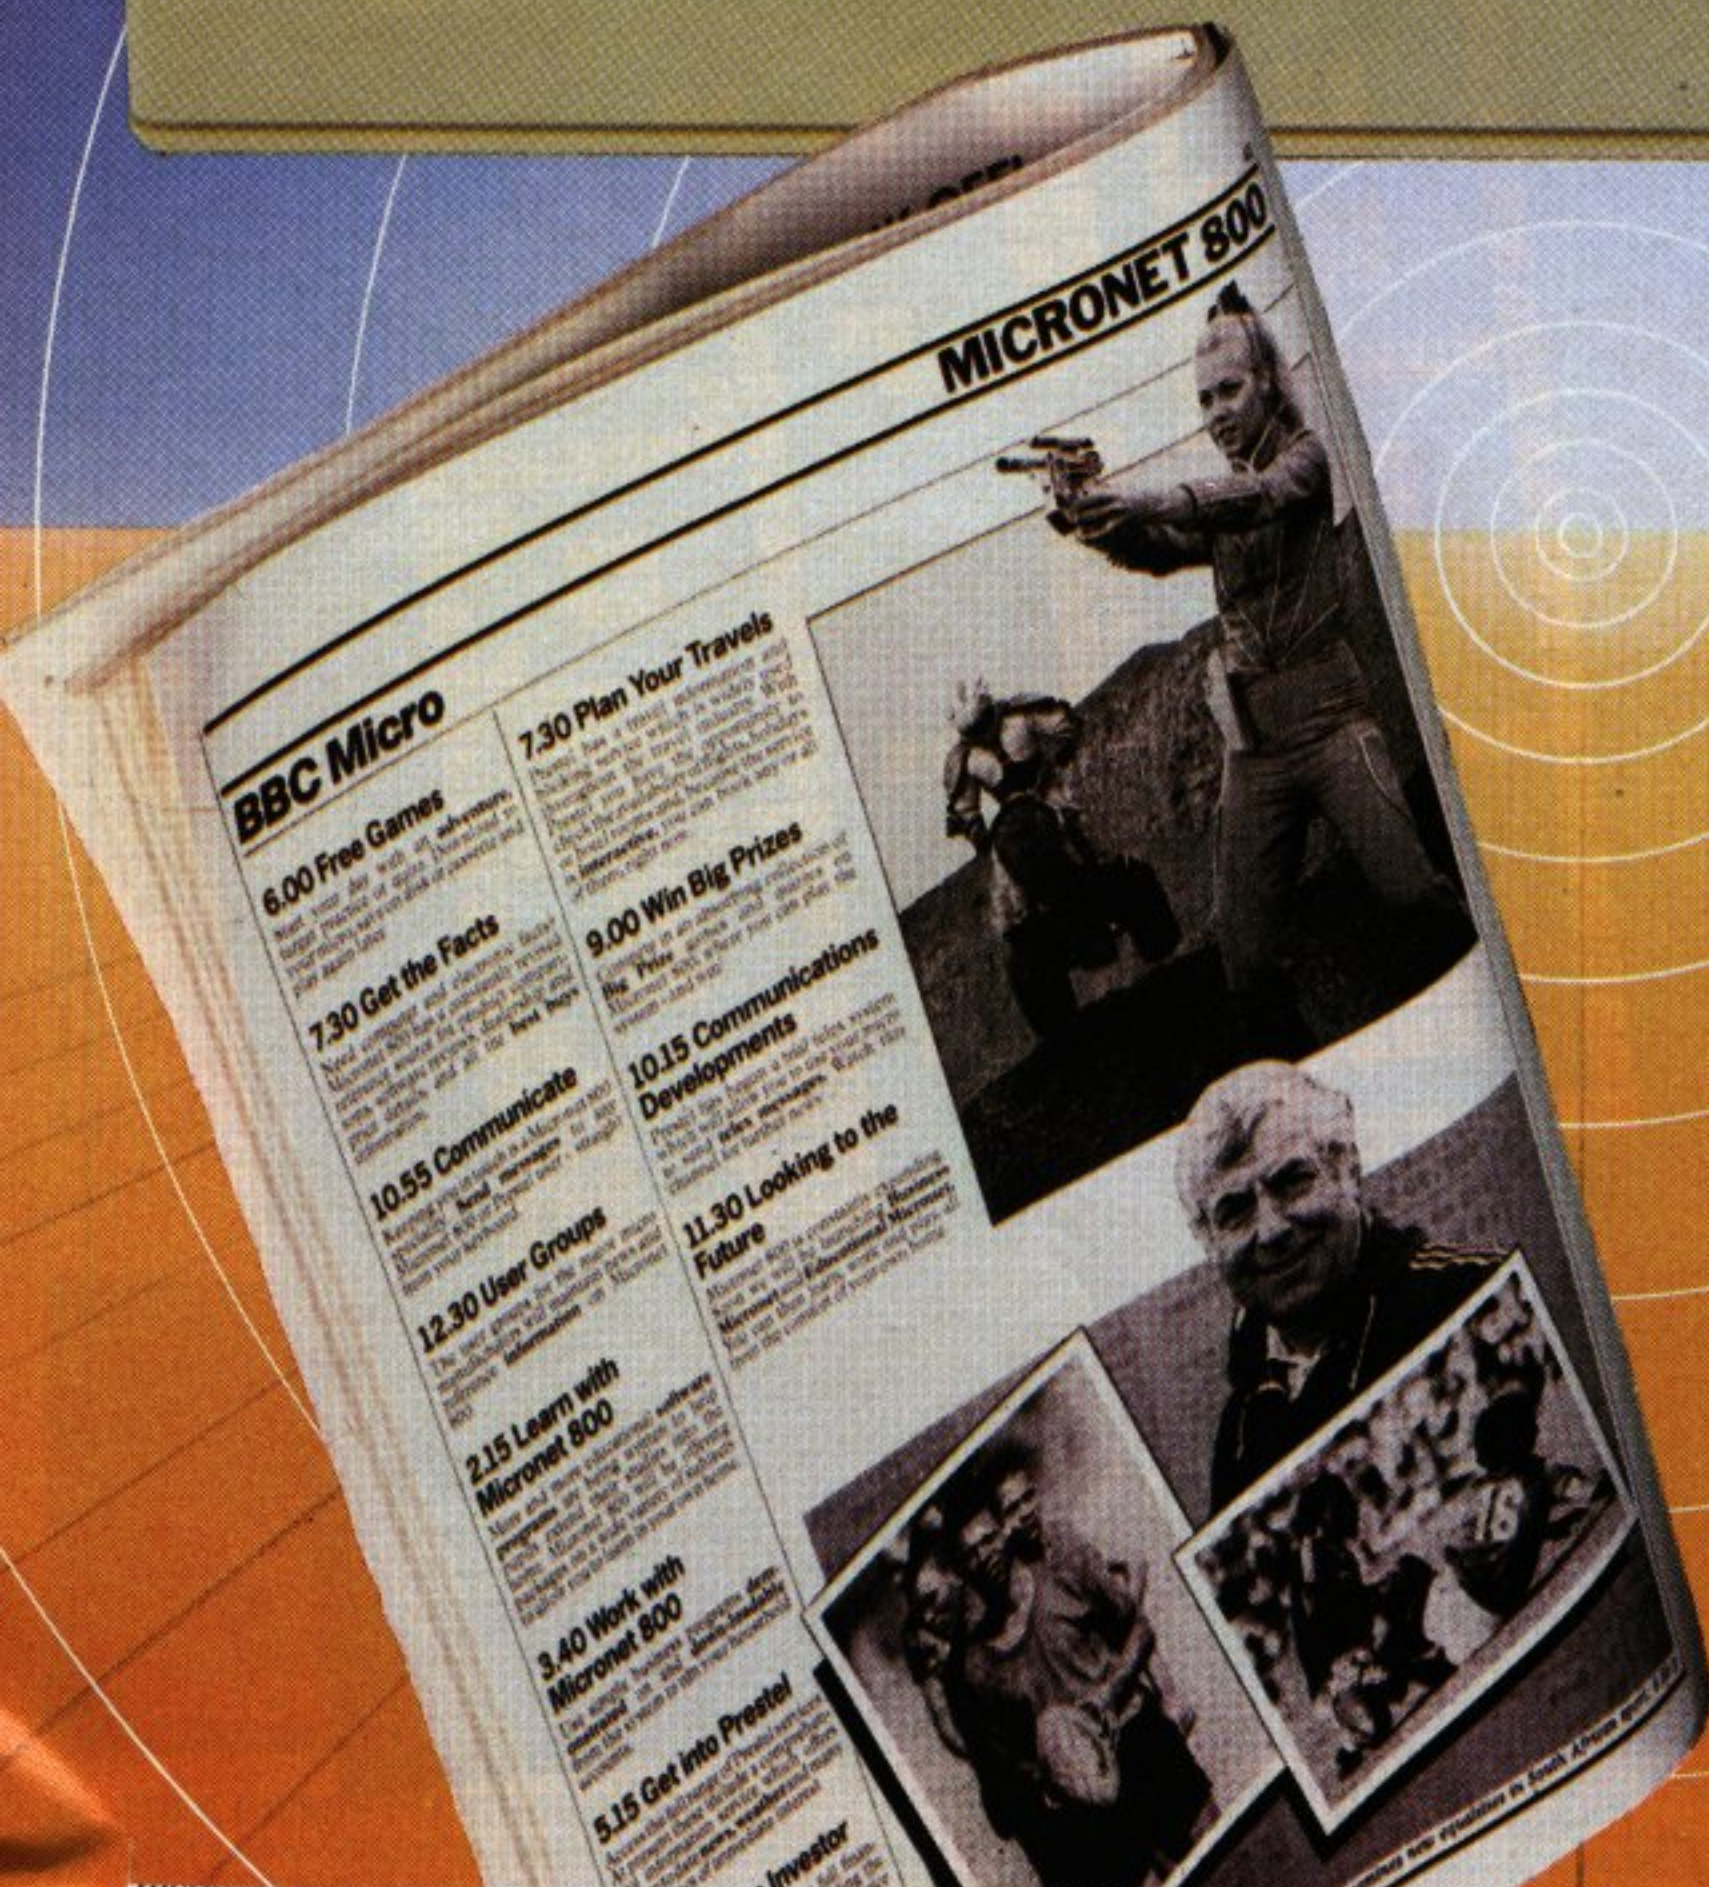

recorder will be given (while stocks last).

3" MICRO DISC DRIVE

True floppy disc, very fast. 80K formatted capacity. Disc drive and interface. Cost only £189.95. Drive cost £129.95

ATARI SPECIAL OFFER

Free Atari game cartridge with every computer purchased. Prices 400 - £149.99. 800 - £299.99

SPARKJET PRINTER OFFER

New quiet printer for BBC. Friction and tractor feed 80cps. Normal £424.35. Only £343.85

TORCH Z80 DISC PACK

800K Dual Disc Drive plus Z80 processor with CMP compatible operating system. Cost £897.00

Send SAE for details on any of the above items.



Large stocks. Prices include VAT. Carriage £1 or £3.50.

BBC 5 BBC Model B with Disc Interface	£40
BBC 6 BBC Model A with Econet Interface	£35
BBC 7 BBC Model B with Econet Interface	£45
BBC 8 BBC Model B with Disc & Econet Interface	£52
BBC 21 BBC Model A to B Upgrade	£8
BBC 28 Econet Upgrade to BBC	£9
BBC 27 Disc Upgrade for BBC B (inc. fitting)	£9
BBC 30 BBC 14" Colour Monitor	£28
BBC 33 Sanyo SM12N Green Monitor 15MHz	£9
BBC 34 Karga K12G Green Monitor 18MHz	£11
BBC 35 Karga K12A 12" Orange Monitor	£12
BBC 41 BBC Single 100K 5 1/4" Disc Drive (AND01)	£26
BBC 43 BBC Dual 800K 5 1/4" Disc Drive (AND02)	£80
BBC 44 Single Disc Drive (100K) for BBC (Teac)	£21
BBC 45 Single Disc Drive (200K) for BBC (Teac)	£26
BBC 46 Single Disc Drive (400K) for BBC (Teac)	£34
BBC 47 Dual Disc Drive (200K) for BBC (Teac)	£4
BBC 48 Dual Disc Drive (400K) for BBC (Teac)	£5
BBC 49 Dual Disc Drive (800K) for BBC (Teac)	£6
BBC 50 Epson FX-80 160cps Printer + Prop. spacing	£4
ATM 2 Acorn Atom assembled 12K ram	£5
ATM 26 Atom New Power Supply 1.8A	£
ATM 21 Floating Point ROM for Atom	£

Large stocks of software for BBC and Atom, Business Games, Educational. Send for comprehensive lists. All printers, disc drives supplied with all cables.

Electronequipment

for BBC in news, fa

36-38 West Street, Fareham, Hants

Tune your BBC micro to a huge database of information, hundreds of software programs, and communication with other users.

The BBC micro. The first to connect to the fast expanding Micronet 800 service. Now you can choose from a range of modems and software packs – including the easy and convenient software on ROM – to connect your BBC Model B, via the telephone line, to a system that will give you more than you ever dreamed possible.

Micronet 800 is fun, friendly and inexpensive to run. Choose from hundreds of free games, download and use them on your BBC whenever you like, play on-screen games (as easy – and inexpensive – as a local phone call), and compete in Big Prize games and quizzes. There's also a range of downloadable games you can buy for less than over-the-counter prices.

Learn through up-to-date education packages, and help run the household with simple business packages. And if you need fast facts about the world of computers, Micronet 800 provides constantly up-dated product


comparisons, reviews, prices, dealership and 'best-buy' information – 24-hours a day, 7-days a week.

You can also access the full range of Prestel[™] services. These include a comprehensive information service offering you up-to-date news, weather and many other topics of immediate interest. You can join Homelink, the world's first home banking service, from the Nottingham Building Society and the Bank of Scotland. If you are an investor, Prestel CitiService gives a full financial information service including the latest share and commodity price movements. Prestel also has a travel information and booking service which is widely used throughout the travel industry. Prestel is expanding fast, and new, improved services are constantly being developed.

Keep in touch – you can send electronic mail to any other Micronet 800 or Prestel user.

All this – and even more as the service grows – is available to you through Micronet 800.

And, if you join the service before October 31, we are offering special discounts on the cost of modems and software packs. So don't delay – send the coupon today.

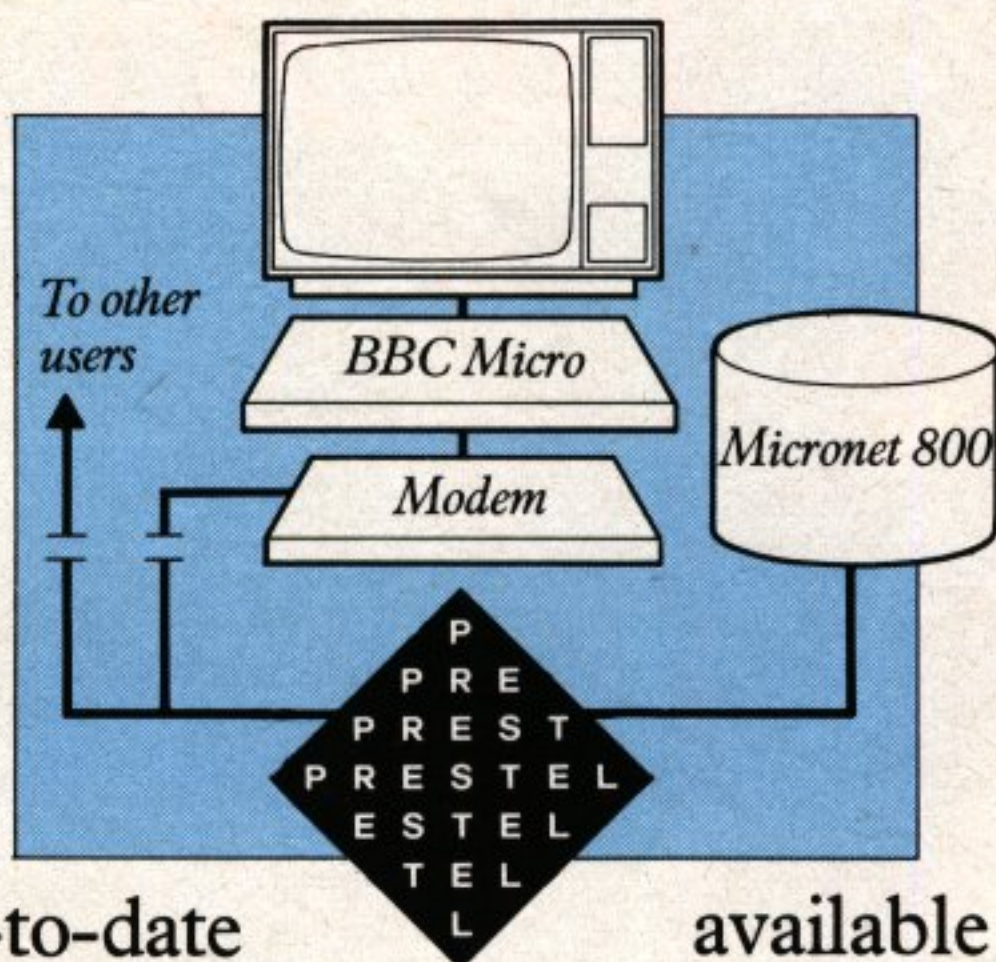

Micronet 800

into a new channel

acts & fun.

Please send me all the information on Micronet 800, the modems and software packs I will need to connect to the service, and a subscriber's application form.

Name _____

Address _____

Tel: _____

Post to Micronet 800, Scriptor Court, 155 Farringdon Road, London EC1R 3AD. Tel: 01-278 3143.

micronet
800

BBC 8

[™]Prestel and the Prestel symbol are trademarks of British Telecommunications.

*Subscribers are responsible for quarterly Micronet 800 and Prestel subscription charges.

One of the many faces on Prestel.



A new age has dawned
with the
STACK
LIGHTPEN

It's a new, easier way to creative software and it's fun too! The Stack Light Pen means freedom from the old labours of the keyboard and a new software style for the future.

Using the Light Pen means you can create programs, including games, with that extra dimension...control, at the touch of the pen. With your Light Pen you can remove words or images from the screen or put them back onto it, or simply move them about the screen. You can even trigger off a series of actions on screen, stopping them at will...with the touch of the Light Pen!

Already
Available
For



And it's so easy to use...simply hold it against the screen, touch the contacts and away you go!

LIGHTPEN SOFTWARE

We've already created software for you to use with your Stack Light Pen...

DRAUGHTS, GO, LIFE, CROSSWORD TWISTER, SIMON, OTHELLO, SEEK & DESTROY, SHUFFLER, LOST IN THE LABYRINTH and there's more on the way!!

STACK LIGHT PENS and SOFTWARE are available from your LOCAL DEALER or direct from:

STACK COMPUTER SERVICES LTD. 290-298 Derby Road, Bootle, Merseyside L20 8LN. (24 HRS) Telephone 051-933 5511, Telex 627026 (Stack G).

Please supply..... LIGHTPENS for the
BBC ☐ **Atari** ☐ **VIC-20** ☐ **Commodore 64** ☐ at £25.00 each £
and the following Software titles..... at £5.00 each £


I enclose a cheque/PO for £
Please charge£.....to my credit card (specify card)
Card No. Name
Address

Add VAT at 15% £
TOTAL £



Access,
Barclaycard Visa,
American Express
Diners.

Stir up the action with Joykeys

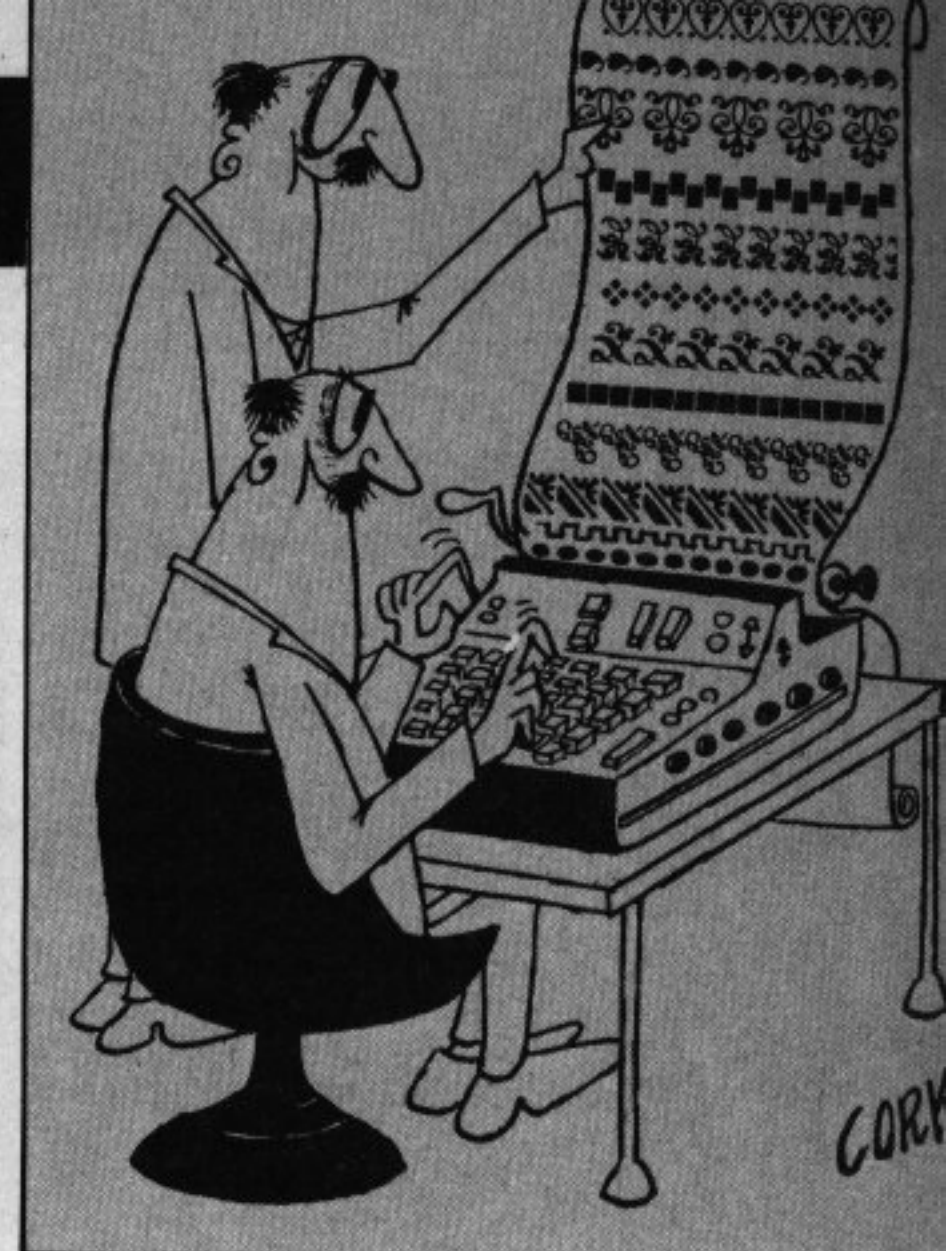

JOYKEYS is a utility that will enable you to add joysticks to most programs that use single letter input from the keyboard. Which means almost all the games that have appeared in *The Micro User*.

Unfortunately, for technical reasons, it will not work with programs using negative INKEY to detect key closures.

When you run the program you will be asked to indicate which key is used to indicate up, down, fire and so on. Having done so the program assembles a machine code routine into &D00.

The joysticks will then function instead of the keys. (Disc users will have to relocate the routine.)

The program also allows you to save the assembled code.

In writing Joykeys I had to take several things into consideration, not least simplicity.

For reasons that will become clear, the program is for OS 1.2 on a model B. It has not been tested on OS 1.0 and will definitely not work on OS 0.1.

The ADC takes 20ms to complete conversion when using two channels, but will give intermediate values if sampled before conversion is complete.

Because of this, a regular interrupt, to sample every hundredth of a second or so, could not be used.

However when the ADC completes conversion the operating system can be made to generate an event which indirectly through &220, &221 with the event code in the accumulator. This is enabled with *FX14,3.

By repositioning these vectors, machine code programs can intercept and act upon the events.

By
MARK SMIDDY

Choosing the type of keys to be simulated by the joysticks was not easy. After consideration I thought it best to use keys that could be inserted into the keyboard buffer using an OSBYTE call with A=128.

This means shift keys cannot be used, but this is no hardship since Joykeys is intended for use with Basic programs which are easy to modify.

This is how the program works:

Lines 10-240 print the instructions on the screen and input the Ascii values of the program's present control keys.

Lines 250-270 set up the parameters for the assembly.

Lines 280-460 successively enable the ADC event with *FX 14,3, select ADC channels 1 and 2 with *FX 16,2 and set the interrupt mask, since an event during the repositioning section would be disastrous. Finally they reposition the vectors, clear the interrupt flag and go back to Basic.

Lines 470-500 test for an ADC event, branching to the start if there is, otherwise branching back to the operating system via &D00.

Lines 510-610 save the registers on the stack, jump to the main routine, and retrieve the registers on return.

Lines 620-740 read ADC channel 0 and check to see if the fire button is pressed. If so it pokes the Ascii code for fire into the keyboard buffer and return to Basic. Otherwise it drops

through to the next line.

Lines 750-830 read ADC channel 1 (by setting X to 1), then test the hi-byte to decide if the stick is pointing left or right.

Lines 840-930 similarly read channel 2, testing to decide if the joystick is moving up or down.

Lines 940-1040 load Y with the value corresponding to the joystick's position.

Lines 1040-1090 actually put the Ascii value into the keyboard and return to Basic.

A few extra points might be useful.

When testing the hi-byte of ADC channels 1 and 2 the values I have used (&E0 and &1F) can be trimmed to suit individual requirements. They could even be swapped round if the user prefers to hold his joystick another way.

The call to flush the keyboard buffer (*FX15,1 or *FX21,0) has been omitted for two reasons. One is that a good games program would flush the buffer anyway.

The second reason is that leaving it in caused some rather strange effects, at worst slowing down the keyboard dramatically.

The fire button has been given high priority and, while activated, stops any further readings being taken.

If it is felt that this is a hindrance, remove the RTS instruction just before NOFIRE.

The machine code copies should be saved in a safe place in memory and called with a *RUN command – preferably before loading the Basic program that uses them.

From Page 87

```

10 REM*****JOYKEYS*****
20 REM
30 REM Copyright 1983 T.M.U. *
40 REM
50 REM By Mark Smiddy *
60 REM
70 REM*****
80 REM
90 REM Six spaces between quotes
100 *KEY0"
110 REM Type line no, then KEY0
120 REM
130 MODE7
140 REPEAT
150 VDU12:PRINT""Input the movement
keys now""N.B.:CAPS LOCK, SHIFT LOCK,
CTRL,""SHIFT, BREAK, AND ESCAPE are
NOT valid""also DELETE, RETURN, COPY,
etc will""register but will not be
displayed"
160 *FX4,1
170 PRINT"Key to move up ";:up=6
ET:VDUup
180 PRINT"Key to move down ";:down
=GET:VDUdown
190 PRINT"Key to move left ";:left
=GET:VDUleft
200 PRINT"Key to move right ";:right
=GET:VDUright
210 PRINT"Key to fire ";:fire
=GET:VDUfire
220 PRINT"All ok?":REPEATG%=GET:UNTIL
G%=89 OR G%=78
230 UNTILG%=89
240 *FX4,0
250 OSBYTE=&FFF4
260 FORN=0TO2STEP2
270 P%=&D02
280 [ OPTN
290 .SETVEC
300 LDA #&00E
310 LDX #&003
320 JSR OSBYTE \Enable ADC event
330 LDA #&010
340 LDX #&002
350 JSR OSBYTE \ Turn off ADC channels 3 and 4
360 SEI \ Don't interrupt just yet
370 LDA &221 \Save event vector

```

```

380 STA &D01
390 LDA &220
400 STA &D00
410 LDA #MYVEC DIV 256 \HI byte of my routine
420 STA &221
430 LDA #MYVEC MOD 256 \LO byte of my routine
440 STA &220
450 CLI \ Clear to carry on
460 RTS \ Back to BASIC
470 .MYVEC
480 CMP #&003 \Is it an ADC event?
490 BEQ START \ YES!
500 JMP (&D00) \ Back to the OS
510 .START
520 PHP
530 PHA
540 TYA:PHA
550 TXA:PHA \Save status etc for later
560 JSR BEGIN
570 PLA:TAX
580 PLA:TAY
590 PLA
600 PLP \ Get them all back
610 RTS
620 .BEGIN
630 LDA #&080
640 LDX #&000
650 JSR OSBYTE \ Read ADC for fire condition
660 TXA
670 AND #&003 \ Mask off HI bits
680 CMP #&001 \ Test bit 1
690 BNE NOFIRE
700 LDA #&08A
710 LDY #fire
720 LDX #&000
730 JSR OSBYTE \ Insert a FIRE condition
740 RTS
750 .NOFIRE
760 LDA #&080
770 LDX #&001
780 JSR OSBYTE \ Read ADC channel 1
790 TYA \ Put the HI byte in A
800 CMP #&01F \ Is the HI byte less than &1F

```

```

810 BCC RIGHT \ If it is the stick is pointing right
820 CMP #&0E0 \ Is the HI byte more than &E0
830 BCS LEFT \ If it is the stick is pointing left
840 .MIDDX
850 LDA #&080
860 LDX #&002
870 JSR OSBYTE \ Read ADC channel 2
880 TYA \ Put the HI byte in A
890 CMP #&01F \ Is the HI byte less than &1F
900 BCC DOWN \ If it is the stick is pointing down
910 CMP #&0E0 \ Is the HI byte more than &E0
920 BCS UP \ If it is the stick is pointing up
930 RTS
940 .LEFT
950 LDY #left
960 JMP KEYS
970 .UP
980 LDY #up
990 JMP KEYS
1000 .RIGHT
1010 LDY #right
1020 JMP KEYS
1030 .DOWN
1040 LDY #down
1050 .KEYS
1060 LDA #&08A
1070 LDX #&000
1080 JSR OSBYTE \Put the ASCII code into the keyboard
1090 RTS
1100 J:NEXT N
1110 PRINT"Save a machine code copy (Y/N)?"
1120 REPEAT:G%=GET:UNTILG%=89 OR G%=78
1130 IFG%=89 THEN PRINT"FIND A SUITABLE AREA ON TAPE":*SAVE"JOYKEY_OBJ".OD
02 0D99 0D02
1140 PRINT"To put JOYKEYS on line type CALL SETVEC""To disconnect it type *FX13,3 or BREAK""On 'BREAK' CALL &D02 to restart""On *FX13,3 type *FX14,3 DO NOT CALL""SETVEC to reconnect"
>

```


ARROWSOFT

presents **NEW GAMES** for the BBC Micro

PONTOON

**Gamble with £1000!
STICK!
TWIST!
BURN!**

**Two levels of Difficulty
Win £30,000 to break
the Bank.**

ALL THE CHARACTERISTICS
OF THE POPULAR CARD
GAME.

Author: Martyn Woodcock.

Also available "ZOMBIES REVENGE"

Play against time to capture your
prisoners.
Evade the Relentlessly chasing Zombies.
12 Levels. 12 Screens.

A difficult game!

Author: David Hughes

"FIGHTER"

Dog-fight action, from the cockpit of
your jet fighter. Up to 5 bandits at a time
attacking you.

Defend with laser canon and heat
seeking missiles. In-flight re-fueling.
An action packed game.

Author: Andrew Porter

**UP TO 20% ROYALTIES FOR
ORIGINAL GAMES**

- | | |
|---|--------------|
| <input type="checkbox"/> PONTOON | £5.75 |
| <input type="checkbox"/> ZOMBIES REVENGE | £5.75 |
| <input type="checkbox"/> FIGHTER | £5.75 |
| <input type="checkbox"/> ABACUS – EDUCATIONAL PACK
6 to 12 YEAR OLDS | £8.50 |

Tick as required

Please allow 14 days for delivery

**To: ARROWSOFT, 9 OXFORD STREET,
SOUTHAMPTON, HANTS SO1 1DJ**

NAME

ADDRESS

.....

.....

I enclose cheque/P.O for the

TOTAL OF £

P.J. MICROSYSTEMS

Your Official Thames Valley Dealer

BBC MICROCOMPUTER PRODUCTS

	Ex Vat	Inc. Vat
Model B 32K	348.26	399.00
Speech Kit fitted	47.82	55.00
Disc I/F Kit not fitted	85.00	97.75
Disc I/F Kit fitted	90.00	103.50
Cumana Disc Drives from £199 plus VAT		
Pace Disc Drives from £185 plus VAT		
Pace DFS chip with disc and manual	29.95	34.44
Pace complete DFS with disc and manual	82.60	95.00
Pace complete DFS fitted	97.60	112.24
Teac Disc Drive 400K 80T DS	229.00	263.35
Clares "The Key"	11.26	12.95
Clares "Replica"	8.65	9.95

GEMINI SOFTWARE PRODUCTS NOW IN STOCK

**Torch Discpack available now
with free software worth
over £1,000**

825.00 948.75

We are also dealers for the **SAMURAI** small business system. This has to be the most powerful machine now available. MSDOS and CPM86 operating systems along with a comprehensive range of application software are available so you should phone now for a demonstration in order to appreciate true 16 bit machine performance.

We supply **Service, Support, Demonstrations, Advice, Sales, Training**

Full range of support hardware and software available.

14 Wood End, Crowthorne, Berks.

Tel: Crowthorne (0344) 772351

BBC SOFTWARE

RICKSOFT

* Arcade Games * Adventures *
* Educational * Utilities * ROMS *
* Languages * and more

HIRE

Most from £1
per fortnight

WITH OPTION TO

BUY

With up to
25% discount

Membership £10

For catalogue and membership form send name
and address to

**Ricksoft, Dept. L, 78, Warren Drive, Hornchurch,
Essex RM12 4QX.**

Tel: (04024) 47722

**Soft
mith**

A.I.D.S UTILITY ROM for the BBC Micro

All these features, *instantly*, at the touch of a key:

- Start Menu** • all functions initiated by one keystroke.
- Disassembler** • full listing format to screen &/or printer;
• Hex & ASCII representations of data;
• disassembled text can be saved to a file & *EXEC'd back for editing & re-assembly.
- Memory Editor** • scroll back & forth displaying blocks of memory in Hex & ASCII.
• Overwrite any section.
- Search string** • search current BASIC program (anywhere in RAM);
• search string can include BASIC keyword tokens & 'wild cards';
• each occurrence highlighted within whole program line;
• options then available include: find next occurrence, list program from that point, return to BASIC or menu;
• useful for listing PROC & FN definitions & where used.
- Replace string** • same features as search: *plus* extra option to replace search string by a new string - any size from 0 to size of original string;
• all, or only selected items may be replaced;
• ideal for removing spaces, compressing variable names, etc.
- Program repair** • makes any 'Bad Program' available for editing.
- Variable Dump** • lists the names & contents of all scalar program variables;
• for arrays, only the number of elements is given;
• for floating point, accuracy is 2 decimal places. (+0,-0.02)

All routines can output to printer &/or screen.
In screen mode, colour highlighting is used to aid readability.

ROM is entered by a single keyword which can be called from soft keys, immediate command, or within a program.

Suitable for A & B models, but must be **OS 1.0** or above Fitted in 5-10 minutes.

Full details available on request. (s.a.e)

Price, including p&p, fully detailed fitting & operating instructions:

£16.50


Send cheque or P.O. to:

SoftSmith, 9 Back Green, HERSHAM, Surrey. KT12 4HY

PRECISION DUAL AXIS CONTROL STICK

Suitable for use
with
Computers,
Robotics,
Machine tools.

Widely used by
Government
departments
and industry.

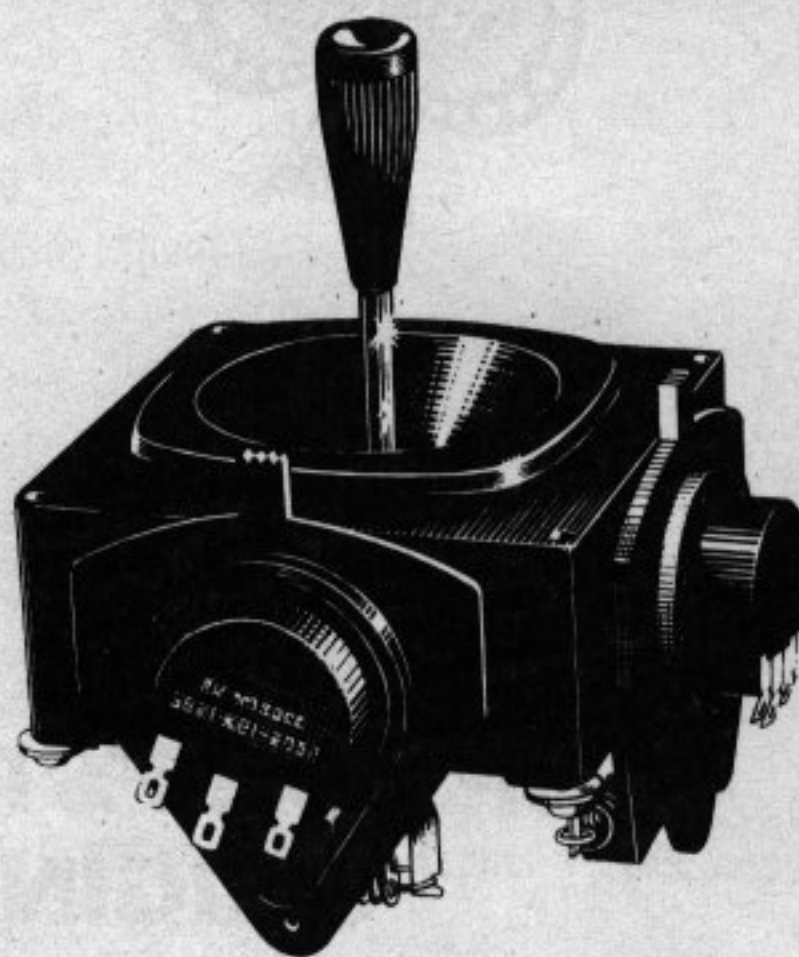

**SUPER SMOOTH PRECISE ACTION, SEPARATE FINE
TRIM ADJUSTMENT, ACCURATE CENTRING, LONG
LIFE MOULDED NYLON PARTS**

Available in kit form - easily assembled.

Standard version - Carbon track Pots. 1 off **£8.50**
P & P 75p

De luxe version - conductive plastic film pots.
1 off **£12.80** P & P 75p

Send SAE for full details of sticks and servos suitable
for Robotics.


OEM and Trade Enquiries invited



SKYLEADER

Unit 8, Airport House, Purley Way, Croydon,
Surrey, CR0 0XZ. Tel: 01-686 6688

**BBC
MICRO
USER**

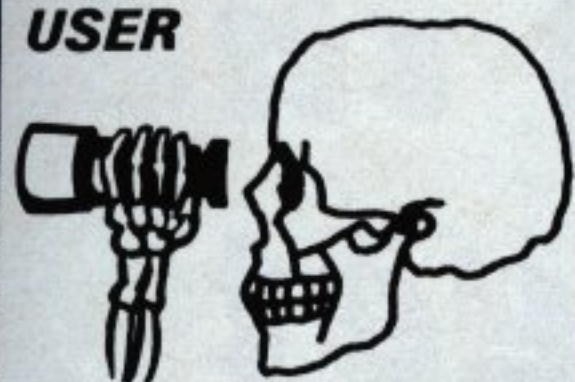

Deathwatch

and 24 other programs
listed in the pages of
BBC Micro User
Vol. 1, No. 1.

March Issue

DEATHWATCH, a superb arcade game that challenges you to use your skill to fight off enemy battleships, tanks and helicopters; **BINGO**, illustrating clever uses of the randomise function; **BUBBLESORT** routines; **TESTS** for function keys in machine code routines; a useful **CASSETTE BUGS FIX** for users with OS 0.1 ... and many **COLOUR** and **GRAPHICS ROUTINES** to help you create a kaleidoscope of screen designs which you can incorporate into your own programs.

**BBC
MICRO
USER**

KING KONG



and 22 other programs
listed in the pages of
BBC Micro User
Vol. 1, No. 2.

April Issue

KING KONG, a fast moving game in which you pilot a helicopter to rescue girls perched on the Empire State Building before killing Kong; **GRAPHICS**, a suite of colourful demonstration programs; **NIM**, a structural game of strategy; **TOKENS**, first steps in unravelling the Basic ROM; **HOROSCOPES**, a fun program with useful error-trapping routines; **FORMATTER**, an essential disc utility; **DISASSEM**, a full machine code disassembler; **HEAT & LIGHT**, two measuring and plotting programs.

**BBC
MICRO
USER**

AIR STRIKE!



and 33 other
programs listed in the
pages of BBC Micro User
Vol. 1, No. 3

May Issue

AIR STRIKE, a fast and furious arcade game that invites you to put your wits against marauding warplanes; Test your mental powers with **PELMANISM**; **25 ANAGRAMS** for you to solve; **CHARACTER**, to generate vertical and inverted text; **TELETEXT**, animation in Mode 7, really brings the screen to life; **LAB**, a trio of programs to interface laboratory equipment; 10 programs to investigate the **OSBYTE** routine; **BEEB**, two joystick exercises; plus more **COLOUR** and **GRAPHICS** routines.

**THE
MICRO
USER**

SPACE PILOT

and other programs listed
in the pages of
BBC Micro User
Vol. 1, No. 4.



June Issue

SPACE PILOT, lost in space with dwindling fuel supplies, you must fight off repeated attacks from alien life forms. To replenish fuel, you have to perform a tricky docking manoeuvre, while to repair the inevitable damage you must land on a mountainous planet. **NOMISM**, you are a nomadic herdsman desperately trying to eke out a living on the plains of Africa. Can you survive drought, tsetse fly and other hazards? A game that also helps to teach geography. **PLUS** other listings from the June issue.

*We've got it
all taped!*

Save wear on your fingers — and ensure your programs are error-free — with the top-quality cassettes of programs listed in The Micro User

£3.75


each (incl. p&p)

**ORDER FORM
ON PAGE 93**

**THE
MICRO
USER**

TENPINS

and other programs
listed in the
pages of
The Micro
User
Vol. 1,
No. 5.

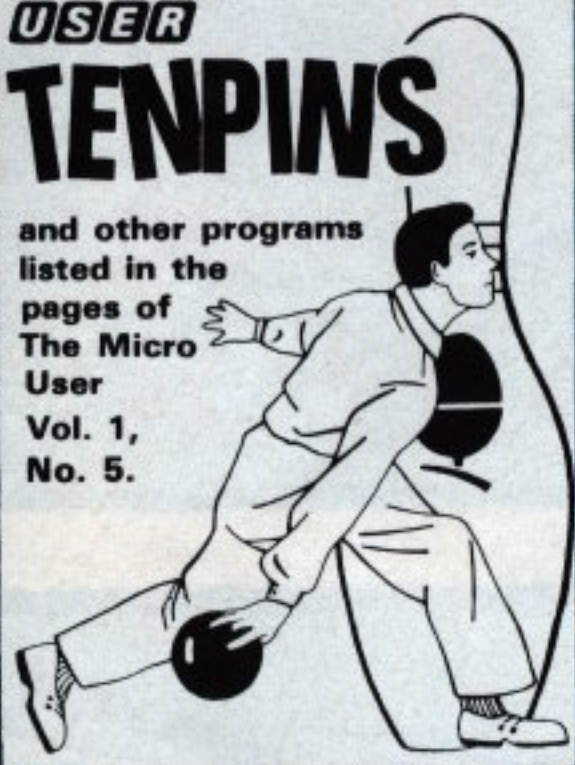


July Issue

TENPIN, a highly entertaining simulation of Tenpin Bowling; **SPACEPODS**, Try to beat alien hordes; **CUP**, Exciting techniques to bring 3D graphics to the BBC Micro; **SCRSAVE** and **CSRLOAD**, Two programs to allow you to save and load screens to tape or disc; **TEST** and **STEADY**, A pair of programs to accompany the Beeb Body Building Course; **BREAKFIX**, Don't let the Break key destroy all your precious variables! **FORMAT**, Creates neater listings which are much easier to read.

**THE
MICRO
USER**

FRUITIES

and other
programs
listed in the
pages of
The Micro
User
Vol. 1,
No. 6

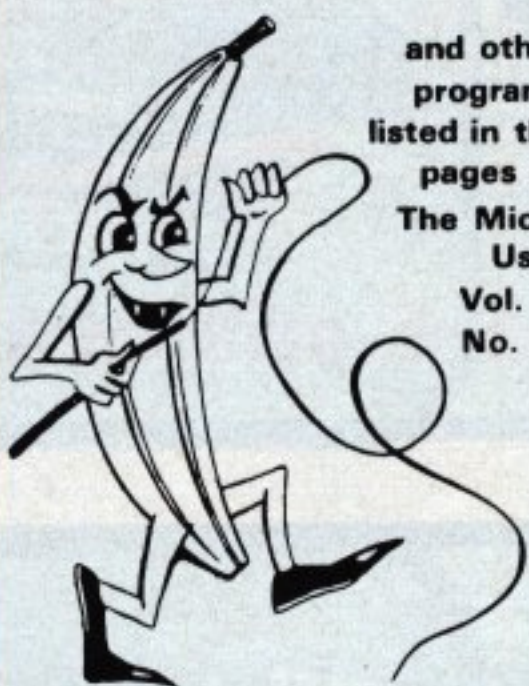

August Issue

FRUITIES, driven by strange urges you climb the ladders of adventure to risk all in the gardens of unearthly frights. Can you survive all the terrors that await you. or will you, too, fall victim to the evil Fruities? A really superb game. **ANIMATION**, a suite of programs that show you how to really bring your screen alive — an essential part of our course on animation on the BBC Micro. **CASDISC**, The essential machine code downloader for your disc system; **PLUS** other listings from the August issue.

**THE
MICRO
USER**

Robin and Marian

and other
programs
listed in the
pages of
The Micro
User
Vol. 1,
No. 7




September Issue

ROBIN & MARIAN, a highly-challenging game in which you play the part of Robin Hood rescuing Maid Marian from the clutches of the Sheriff of Nottingham. **GALACTIC INVADERS**, an extremely well-written cross between two well-known arcade games. **DFS BENCHMARKS**, 14 programs to test out disc filing systems. **ANIMATION**, four programs to teach new techniques. **TERMINAL**, three programs to connect a BBC Micro to a mainframe. **PLUS** other listings from the September issue.

**THE
MICRO
USER**

GONE FISHIN'

and other programs
listed in the pages
of The Micro User
Vol. 1, No. 8

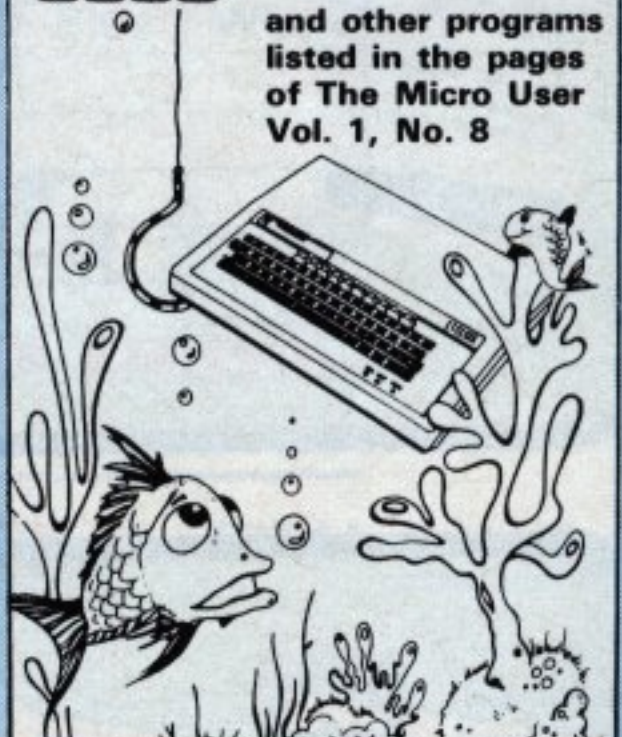

October Issue

FISHING, a compulsive simulation of a day's angling. **JOYKEY**, to convert your programs to joystick control. **PENTEST**, tests the Micro User light pen, and **BELLRINGER**, an amusing and musical way to use it. **CONTOURS**, an educational program with many uses. **LINKs**, two superb pieces of software to let BBC Micros talk to each other. **CHESS**, the winning entry in our June contest. **PLUS** six other programs from the pages of The Micro User, and all the listings from the first issue of Electron User.

THE MICRO USER

A subscription
will ensure you
get your own
personal copy
**HOT OFF THE
PRESSES** month
after month for
the next year.


Be one of the first to get each issue!

Every owner of a BBC Micro – and everyone thinking of buying one – needs to get Micro User every month. It's the biggest, brightest, most authoritative yet completely independent guide to a machine that has so much potential you will never tire of reading about its remarkable capabilities.

You can buy Micro User from your local newsagent or station bookstall. Or you can take out a 12 months subscription and have it delivered by post.



Copies of these back issues are still available at £1.25

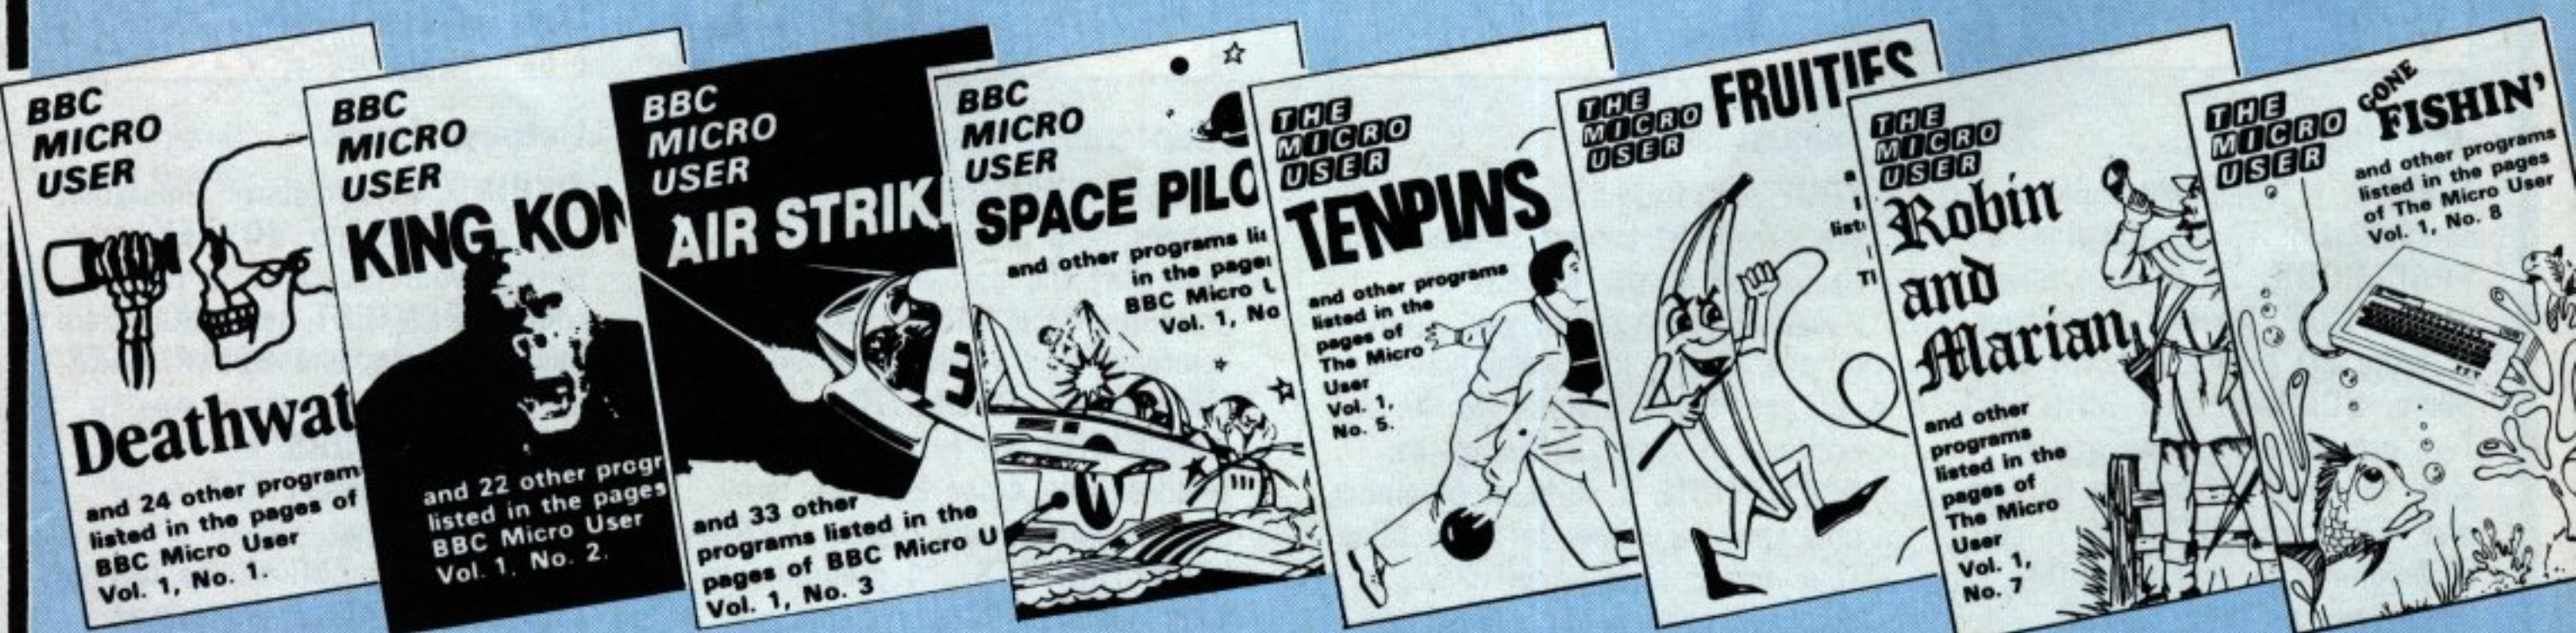


Cassette tapes of Micro User programs – £3.75

Or take out a year's subscription and have your cassette posted to you each month. You can start your subscription from any issue to take advantage of this offer.

FREE

COMPLETE THIS
COUPON TODAY

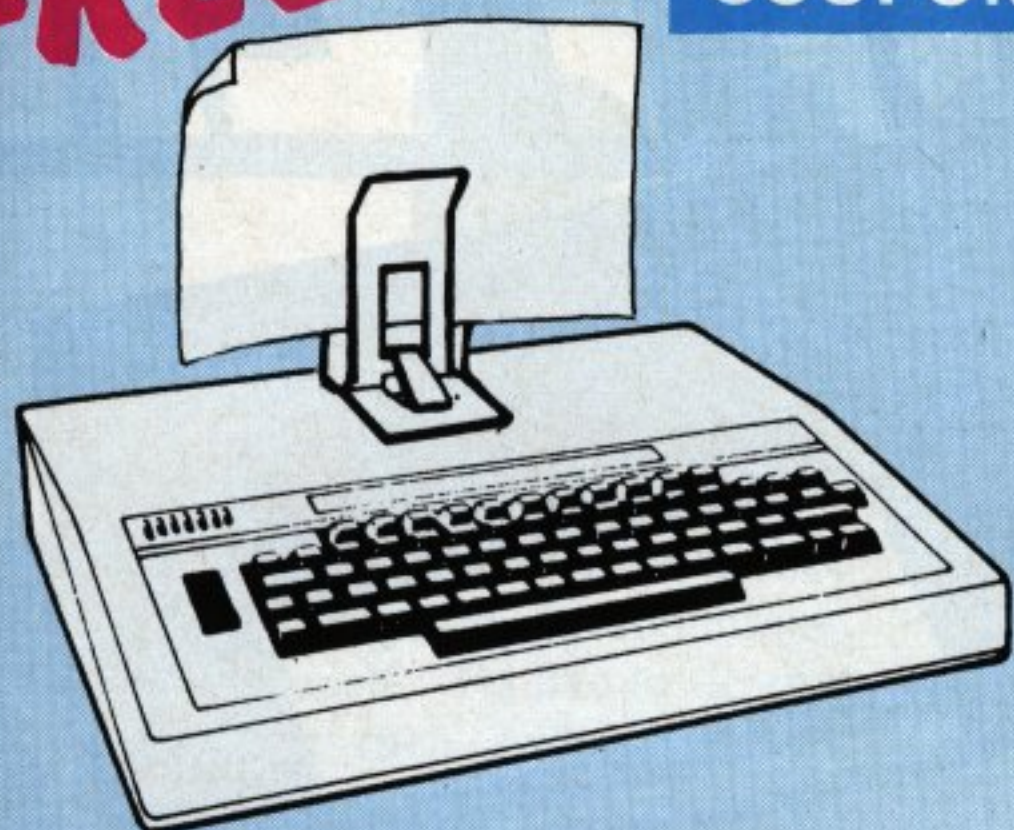

If you take out a subscription to *Micro User* you will receive completely free the sturdy copy-holder illustrated above, together with a large crib card containing essential information and charts that will save you continually referring to the User Guide. This free gift is for a limited period, so subscribe now!



**Sweat
Shirts**


£6.29

**T
Shirts**

£3.29

Blue printing on either light blue or white backgrounds

Keep your
collection of
Micro User
complete with
these handsome
binders

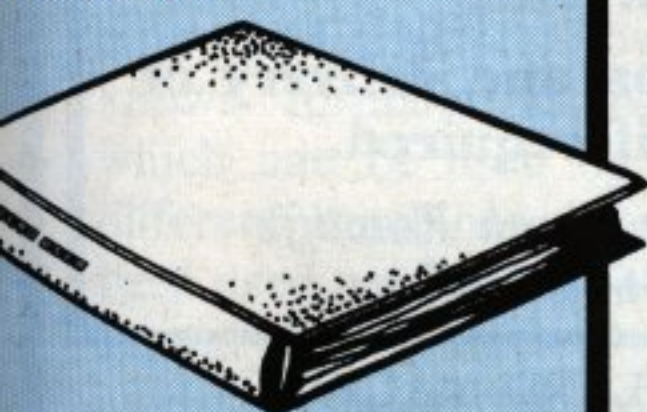

£3.95
(UK)

**Your BBC Micro
needs
protecting!**



£3.25 Standard
(beige)
Deluxe
(clear)

ORDER FORM

All prices include postage, packing and VAT,
and are valid to 31 October 1983

Please enter number
required in box

£ p

Micro User annual subscription

UK	£12	<input type="text"/>
EIRE	£13	<input type="text"/>
EUROPE	£18	<input type="text"/>
Surface mail - USA	£15	<input type="text"/>
Air mail - USA	£25	<input type="text"/>
Surface mail - Rest of world	£15	<input type="text"/>
Air mail - Rest of world	£30	<input type="text"/>

Commence with issue TOTAL

Micro User back issues

<input type="checkbox"/>	£1.25 UK	March 1983	<input type="text"/>
<input type="checkbox"/>	Rest of world:	April 1983	<input type="text"/>
<input type="checkbox"/>	£1.50 - Surface	May 1983	<input type="text"/>
<input type="checkbox"/>	£2.50 - Air mail	June 1983	<input type="text"/>
		July 1983	<input type="text"/>
		Aug 1983	<input type="text"/>
		Sept 1983	<input type="text"/>
		TOTAL

Cassette tape annual subscription

£40 (UK & Overseas)
Commence with tape (state month) TOTAL

Cassette tape single copies £3.75

(UK & Overseas)

Deathwatch	March 1983	<input type="text"/>
King Kong	April 1983	<input type="text"/>
Air Strike	May 1983	<input type="text"/>
Space Pilot	June 1983	<input type="text"/>
Tenpin	July 1983	<input type="text"/>
Fruities	Aug 1983	<input type="text"/>
Robin & Marian	Sept 1983	<input type="text"/>
Gone Fishin'	Oct 1983	<input type="text"/>
	TOTAL

Dust Covers

£3.25 - Standard
£3.95 - Deluxe
(UK & Overseas) TOTAL

Binders

£3.95 - UK
£5.00 - Overseas
TOTAL

T-Shirts £3.29 (UK & Overseas)

Sweat Shirts £6.29 (UK & Overseas)

		T-Shirt		Sweat Shirt	
		Blue	White	Blue	White
Age 6-8	28"	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Age 10-12	30"-32"	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Small	34"-36"	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Medium	36"-38"	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Large	38"-40"	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Extra Large	40"-42"	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
				TOTAL

Payment: please indicate method (✓)


TOTAL

☐ Access/Mastercharge/Eurocard
☐ Barclaycard/Visa
☐ American Express

Card No.

Expiry Date

☐ Cheque/PO made payable to Database Publications Ltd.



Name

Address

Signed

Send to: **Micro User, FREEPOST, Europa House,
68 Chester Road, Hazel Grove, Stockport SK7 5NY.**
(No stamp needed if posted in UK)

Or you can order by phone
quoting credit card number
and expiry date.

061-456 8383 9am - 5pm

061-456 4157 (subscriptions/back numbers)

SPECIAL OFFER

SMITH-CORONA® TP-1™

- LOW COST DAISYWHEEL
- MICROPROCESSOR ELECTRONICS
- SERIAL, PARALLEL or IEEE INTERFACE

£325 + VAT

ORDER NOW WHILE STOCKS LAST.
PRICE INCLUSIVE OF CABLE FOR
THE MICRO OF YOUR CHOICE.
PHONE CHRISTINE ON 0905 612688 TODAY.



Technicare

TECHNICARE PRODUCTS LTD.
22 SANSOME WALK
WORCESTER WR1 1LN
TELEPHONE 0905 612688 (5 LINES)



Home & Business Computers

THE NORTH'S LEADING COMPUTER SUPPLIERS



HARDWARE

BBC MODEL B

£399

DISC I/F KIT

£79.00 (Fitted)

Wide range of add-ons

RING FOR ELECTRON DELIVERY & PRICE

DISC DRIVES

(inc. Utilities Disc and Manual)

TEAC 100K single sided

£230

Teac 200K single sided

£305

Teac 400K double sided

80 track

£397

New Slimline 100K disc drives

£205

Plus LVL/Acorn Disc Drives

QUICK SHOT JOYSTICK

Deluxe Contour Grip, 2 Firing
Buttons (base & grip) Rubber
suction feet. £15.95



SOFTWARE – from
£4.50

Micropower, Salamander, Digital
Fantasia, Acornsoft, IJK, BBC
Soft, Bug Byte, etc.

ALL PRICES
INCLUDE
VAT AT
15%

PRINTERS AP 100A £229 SPARKJET £420
RX 80 £299 MICROLINE 80 £229

SEND FOR PRICE LIST

SERVICE AND SUPPORT BY FERRANTI

OLDHAM

54 Yorkshire St., Oldham, Lancs.

Tel: 061-633 1608

ROCHDALE

73 Yorkshire St.,

Rochdale

EDUCATION AND BUSINESS USERS

We offer:

- Wide range of Business and Educational Software.
- Educational and bulk order discounts.
- Warranty and post warranty maintenance.
- On site maintenance if required.
- Collection and delivery of repairs if required.

Contact Frank Ratcliffe
on 061-633 1608

UK MAINLAND MACHINE
DELIVERY £5.00



OPENING 8th SEPTEMBER

BASICODE

HOW many times have you watched your friend's computer do something, thought to yourself, "I'd like to do that on mine", and then realised that it would take a long time because of the sheer volume of retyping involved?

Some people have attempted to remedy this predicament.

The first approach I came across was a Canadian program which allowed an Apple II to read a Pet's tape (Basic only) enabling the Pet program to be put into the Apple with as much translation as possible.

It was a brave attempt and worked very well – except, of course Pet graphics don't match those of the Apple, the Pet has a timer whereas the Apple hasn't, and so on.

In other words, any decent program on the Pet will just not work on the Apple without considerable time and effort being spent on it.

A Dutch radio programme, Hobby-scoop, which looks at electronic developments, hi-fi, space research, communications and computers, decided in 1978 to try transmitting computer programs over the air.

This was a natural progression from their earlier experiments in slow-scan television and viewdata pictures over the radio.

In 1979 regular transmissions of computer programs for the Apple, Pet, Tandy and Exidy Sorcerer began to take place, but the low Baud rates (300 for some of the machines) and consequent long transmission times for these began to pall. And, of course, only one brand of machine at a time could be serviced.

A group of enthusiasts found an answer when they produced a standard Basic which could be read and written by various home computers.

This has now been rewritten to form a new and relatively powerful language known formally as NOS-Basicode-2 which can be used by more than 17 different machines. The language has been used regularly on the air since last January.

Hobbyscoop is transmitted on Hilversum 2 on the medium wave 747kHz (401m) on Sundays at 1810

It's a sort of all things to all machines type of language

GMT (1710 in the summer) and can be heard in England, especially in the South.

Since the program is also being received in many countries – and encouraging reports of excellent data capture have been heard from all of them – the computer part of the

By MAX PARROTT

programme also carries English explanations.

The question is, this is all very well, but how does it help? Well, Basicode can help you very much if you have access (maybe through friends) to a variety of machines.

A school or college with two or three brands of computer will probably benefit the most. A useful program can then be written which will, hopefully, work on all of them.

Basicode allows most of the usual Basic commands such as ABS(), CHR\$(), GOTO, LOG(), DATA, RESTORE, TAN() and TAB(), all of which are handled in the usual way.

Those commands which tend to be very machine dependent, such as CLS (which has other forms on other machines) or A\$=GET (which is more usually GET A\$), are handled in sub-routines, each specific to each machine but at a standard line number.

Thus in place of CLS your program would include the statement GOSUB 100. At line 100 the command appropriate to your machine is included (together with Return of course). This would be CLS on a BBC Micro or Tandy, HOME on the Apple, and so on.

These subroutines, of which there

are 12 standard ones, are all between lines 0 and 999 and are written out automatically in your machine when you run Basicode.

Your program can be saved to tape in the standard Basicode protocol which can be read by any other of the 17 machines on the market in the system.

These include the BBC Micro (Models A and B), Apple II, Commodore CBM 3008, 3016, 3032 (new ROMs) CBM 4016, 4032, 8032 and 8096, Commodore 64, Pet 2001 (old ROMs) and Vic 20, DAI Personal Computer, Exidy Sorcerer, OSI, IP-Computer, Philips P 2000, Sharp MZ80A, & K, SWTPC, Tandy TRS-80 Models I and III and the Videogenic.

The manual's description of the language is good, assuming you know Basic, so you will soon be programming quite happily in Basicode.

One improvement I would like to see someone undertake to write for Basicode is a set of standard high resolution graphics commands at standard subroutine line numbers.

This will need a lot of thought and a good knowledge of the capabilities of other machines so that a clever way of transmitting the details of these capabilities is found.

On the text side, Basicode presently assumes that a video displays consists of 24 lines of 40 characters, but requests that only 16 lines are used because many machines will only handle that number.

Clearly this approach to the lowest common denominator cannot be used for good graphics.

● Unfortunately at the present time Basicode 2 can only be obtained from Holland. We hope to announce price and UK availability in our next issue.

BBC &
ACORN
USER

A WINNING COMBINATION FROM DE

ONLY
£399*


Low cost
plotting
solution

*Complete system including
BBC Plot software and FREE interfacing cable.


With the Strobe 100 Graphics System, high quality
plotting can now be yours for a fraction of the cost of most other systems.
'... is ideal as a tool for a school or college when used in conjunction with
the BBC micro.'

'It only took a few minutes to get the system up and running.'

(Practical Computing, Aug 1983)

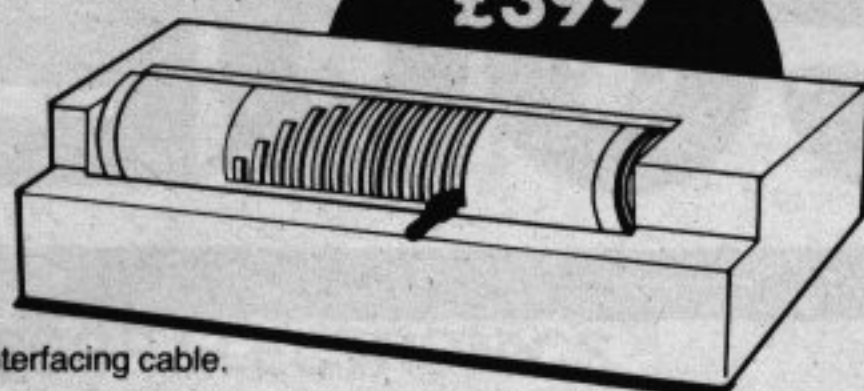

ONLY
£235

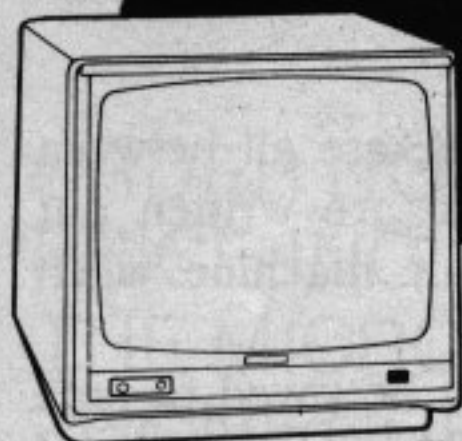

Kaga RGB colour monitors

Kaga RGB colour monitors are specifically
designed for use with computers, custom-
built for the functions they perform, with solid
state circuitry to ensure utmost reliability. They
are ideal for the BBC/Acorn micro and offer a
choice of resolutions to meet your needs. Our low
prices mean you can insist on Kaga quality.

(Prices exclude VAT & carriage)

Trade enquiries welcome

TEL: 0442 60155 (14 lines)

DE

The computer peripherals people

Data Efficiency Ltd

Data Efficiency Ltd, (CPD), Finway Road, Hemel Hempstead, Herts HP2 7PS
Tel: 0442 60155 (14 lines) Telex: 825554 DATEFF G

ALL FINGERS GO!

(BBC 'B')

Fantastic new software pack from NEC – an
ultra fast touch typing course comprising ten
lessons from beginners' standard to full
keyboard typing.

Includes error checking, speed measurement
and colour adjustment facility.

As compulsive as a computer game – but get
hooked with a difference; learn a skill that is
essential in the computer age.

Available as

set of two cassettes @ £14.95 inc. VAT
40 or 80 track disc @ £28.75 inc VAT
from bookshops or direct from

NATIONAL EXTENSION COLLEGE

Dept 46

18 Brooklands Avenue, Cambridge CB2 2HN.

MUSICSOFT

Fun & Educational musical software for
BBC 32K Micro.

THE Synth... by MUSICSOFT (OS 1.0+)

This 'synthesizer' program has features which to our knowledge are unique.
* ALTER RHYTHM. Once recorded, a musical line's rhythm and timing can be
altered by tapping a single key in the new rhythm. * REPEAT. Repeat information
can be inserted in order to save space (typical 1000 note tune can take up less
than 250 note spaces). * Alter envelope, pitch, volume as you play in real time.
* Play backwards and forwards in your tune altering any note you wish. * INPUT
in realtime can be either hesitant or correctly in time. * UNIQUE 'clean up', if
your rhythmic tapping is slightly imperfect the computer detects and tidies up for
you. * Choice of how many notes per channel, i.e. 1000 notes if using 3
channels, 1500/ch. for 2 etc. (Number can be increased when you know the
program).

* Input keyboard stretches from TAB to * cursor.

Apart from these features THE Synth can of course save and load from tape, it
has a full envelope edit facility, uses 3 music, 1 noise channel, is fully user
transparent so that you can fiddle if you wish, has speed alter etc.

*** This is the music program for the person who wants to make human music
on a computer rather than perform mathematical or finger dexterity exercises.
THE Synth cassette & instructions. ONLY £8.75 inc. P&P.

★ ★ ★ ★ ★

'MUSICTOOLS 1' 5 music utility programs on one tape (All O.S.)

* ORGAN. Play, store, replay faster, slower, exactly as played (I) or smoothed
out. Unique rhythm-alter feature, low notes not mentioned in the 'Guide'. * TUNE
GENERATOR. Creates a chord sequence, tune, quaver variations on the tune,
displays a dynamic keyboard and notes on a staff as the tune is played (it
LOOKS like music). * CLEFTOOL. Draws musical symbols in any size you wish
(within reason! 26 sizes), all are put on a staff ... Great for teaching. * 1,2,3
PART TUNE PLAYER. Simple input from data ... with a very unseasonal demo
tune. * ENVELOPE EXPLORER. A full envelope edit program. Display and alter all
parameters with the cursors. Experiment with the sound power of your BBC
Micro. * Over 60 procedures to use in your own musical programs.
MUSICTOOLS 1 cassette and instructions £5.75 inc. P&P

★ ★ ★ ★ ★

'PIEMAN' ... Not as Simple as Simon! (All O.S.)

*** "The best version of Simon I've seen, it goes so much further than most ..."
Quote by a rival Software House! Starting with a Simon look-alike, this suite of
musical games is great fun for 5 year olds, and yet proves frustrating and
addictive to music graduates in the later stages. Scores and skill levels are
additive and alterable.

PIEMAN cassette and instructions £3.75 inc. P&P.

Cheques and Official orders to:

MUSICSOFT, 12 Fallowfield, Ampthill, Beds. Tel: 0525 402701

NOTE INVADERS


by Dereck Riddell



Three superb programs which do just what music teachers
have told us over and over again they want. Never has
learning to read music been so much fun and so easy.
STAFF1 and STAFF2 teach bass and treble note recognition
with full colour and sound. INVADERS lives up to its name –
a frantic games format opportunity to increase note reading
speed. Name the notes before they destroy your base!
Three programs for £9.25 (inc. VAT) BBC 'B' and Spectrum
48k.



TRIANGLES



If your children made the most of our four-program suite
called ANGLE, then you'll want this one too. TRIANGLES
takes the same format: four distinct programs – two of them
demonstrate the important concepts; two assess
understanding. For learners 8 and over. Four programs for
£11.25 (inc. VAT) BBC 'B' and Spectrum 48k.



PUNCMAN 3 and 4



PUNCMAN 1 and 2 is our most successful educational tape
to date. Thousands of children have improved their basic
punctuation with the help of the happy duo – Noshier (who
gobbles the marks) and Puncman (who, with your help, puts
them back). Now this pac-pair are back in PUNCMAN 3 and
4, this time tackling speech marks, exclamation marks, colons,
etc. Fourteen new and original stories in 3 programs for
£9.25 (inc. VAT) BBC 'B' and Spectrum 48k.



Details of these and more from (SAE, please):

Home/Trade enquiries/orders to:

chalksoft
LTD.

37 Willowslea Road,
Northwick, Worcester
Tel: (0905) 55192

Educational orders direct
to our educational
distributors:


WARD LOCK EDUCATIONAL,
47 Marylebone Lane,
London
W1M 6AX
(01-486 3271)



Chalksoft – the innovators in EDUCATIONAL software...

A Ling Kee Company

AT LAST

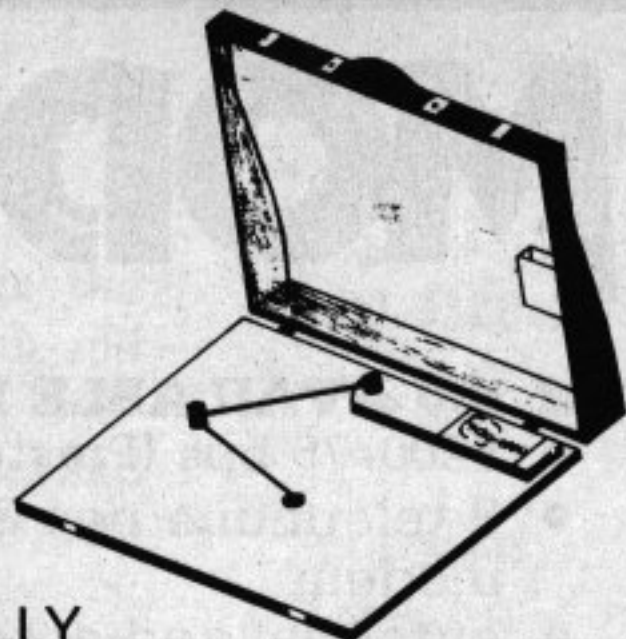

A FULLY
CASED G.T.
WITH 8 DRAWING
PROGRAMS

Transfer pictures to your computer (Model B only) quickly and easily with our Graphics Tablets. Pictures may be relocated, reduced, squashed or enlarged.

Package includes many drawing functions including squares, circles and ellipses etc.

Some absolutely new!

Now you can draw in MODES 0,1,2,4&5

Large drawing area 20" x 13", when cased 22" x 18", case fully detachable.

All this for only **£175** + VAT + £11 p&p.


Delivered by Securicor

For more details send SAE to address below or phone (0622) 59778

MICRO-DRAW Ltd.
48 Hedley Street
Maidstone
Kent ME14 5AD



BBC/ACORN USERS

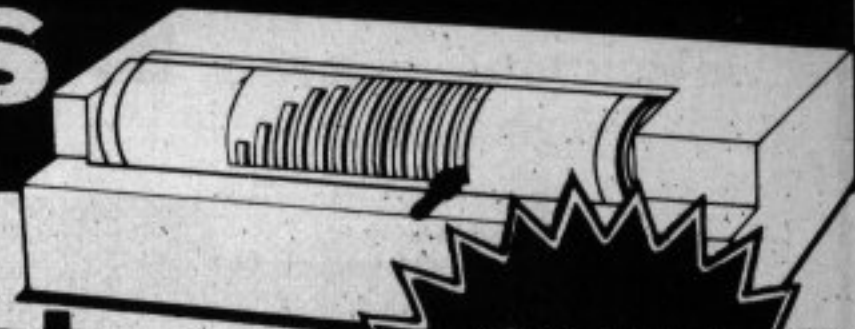

Low cost plotting with STROBE

ONLY
£349*

LOOK WHAT 'PRACTICAL COMPUTING' (AUG '83) HAS TO SAY ABOUT THE STROBE:

- ☛ ... is ideal as a tool for a school or college when used in conjunction with the BBC micro. ☛
 - ☛ It took only a few minutes to get the system up and running. ☛
 - ☛ Unlike a number of other plotters the Strobe is well served with software. ☛
 - ☛ A good manual complements the software. ☛
- Produces simple line drawings, graphs, pie and bar charts, overhead transparencies, etc.

* Complete system including BBC Plot software and FREE Interface Cable

When ordering please state if you require software on DISK or CASSETTE. Please add 15% VAT and £3 for carriage. Pay by cheque, PO or Access. Send to:

AIMGRAM (09277) 68211

Aimgram Ltd, 31 Roman Gardens, Kings Langley, Herts WD4 8LG



NEW FOOD FOR YOUR BEEB!

Looking for something a bit different? Fed up with evaporating aliens? Tired of chasing monsters? Are endless missions in deep space proving a strain?

Then you need **THIRD PROGRAM**, a new source of RAM-fodder for your ever-hungry Beeb.

HOROSCOPES is a fun program which gives you personal character readings – terrific for parties, or, with a printer, a lucrative fund-raiser at fetes etc. It may even convince your sceptical family and friends that the computer's not so bad after all!

WHAT MAKES YOU TICK? is another original concept from Third Program – a personality test program – find out about yourself the fun way!

BEST SELLERS is your chance to be the hero or heroine in the novel of your choice. Do you want to be the hero in a fast-moving spy thriller?

Or perhaps the beautiful heroine of historical romance? Then **BEST SELLERS** is for you! Tell the computer your details, and out comes the story, with YOU as the star! Another winner from Third Program.

HOROSCOPES, **BEST SELLERS** and **WHAT MAKES YOU TICK?** are for the BBC Computer with 32K, O.S. 0.1/1.2, and cost just £5.95 inc. p&p each on cassette, two for £10.90, or **ALL THREE** for £14.85. Add only £2 per order for 40-track disk.

STOP PRESS!

ELECTRON VERSIONS NOW AVAILABLE!

State "Electron" clearly when ordering.

All software in stock and ready to dispatch.

Send cheques, payable to "Third Program", to:

Third Program(MU), 189 Cheddon Road, Taunton, Somerset, TA2 7AH

Mail order only please. Dealer enquiries welcome.

THIRD PROGRAM

... THERE IS A SOFT OPTION!

TWO WAYS TO ENSURE YOU GET

THE MICRO USER

EVERY MONTH

1. Complete and mail subscription form on Page 93
2. Hand this form to your newsagent.

Please reserve me a copy of The Micro User magazine every month until further notice.


- ☐ I will collect
- ☐ I would like it delivered to my home.

Name _____

Address _____

Note to newsagent: The Micro User should be obtainable from your local wholesaler, or contact the distributor – Wells, Gardner, Darton & Co Ltd Tel: Faygate 444

SMART MODEM!

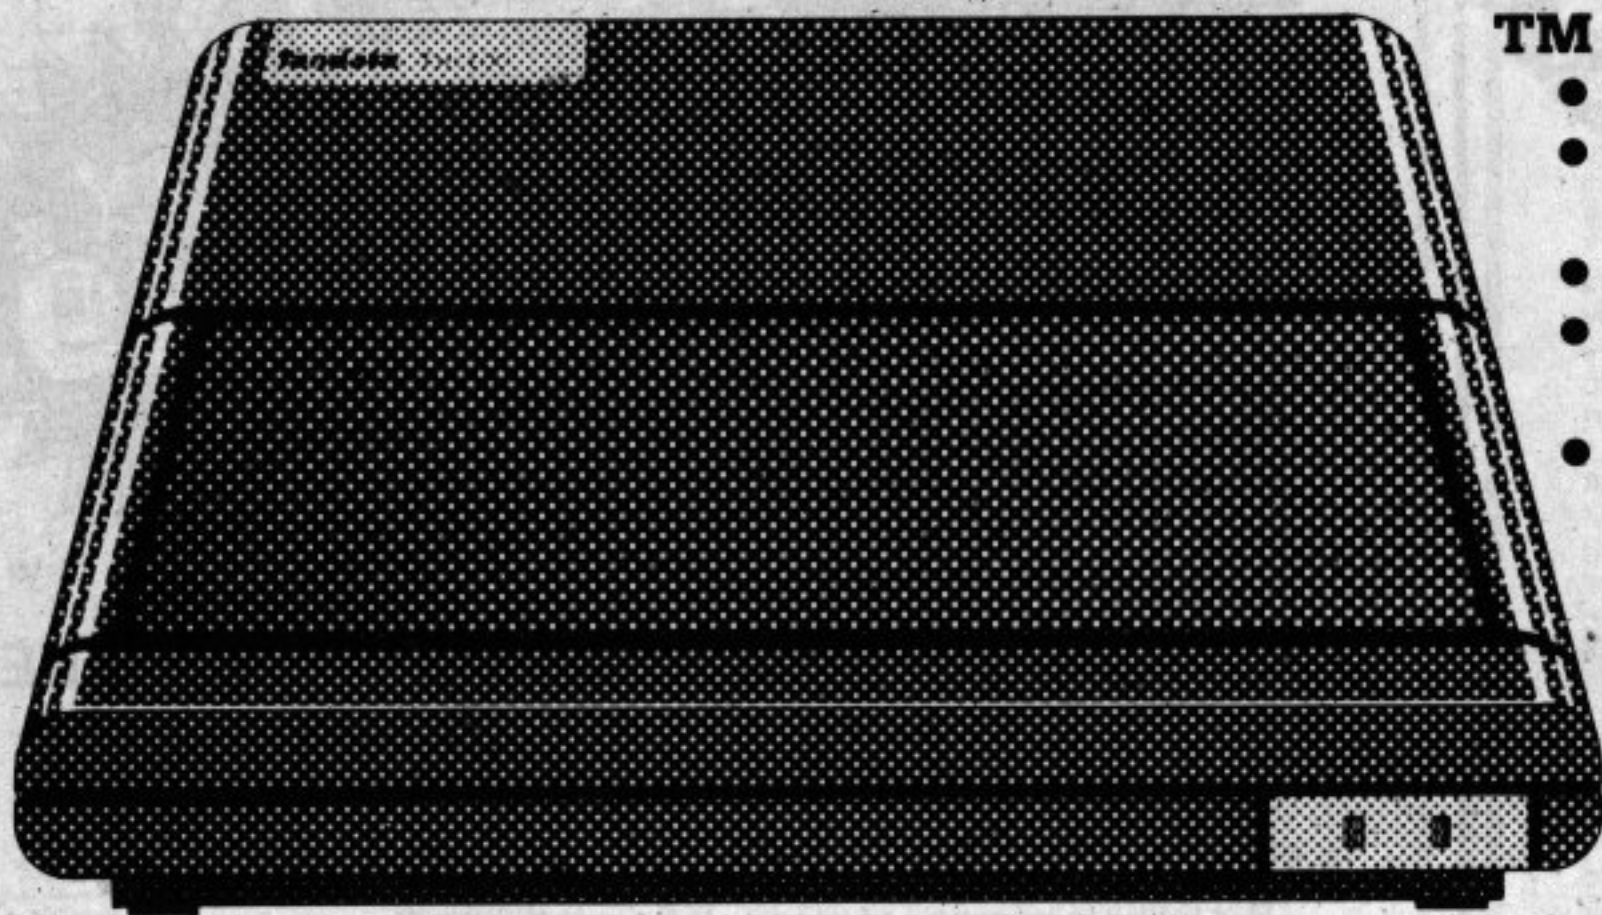

TM 100 AVAILABLE NOW:

- 1200/75 bps (Prestel, Telecom Gold etc.)
- 8 telephone nos & 8 ID's stored in modem
- auto-dial and auto-retry
- RS 232 interface to micro, 1200bps duplex
- telephone cable with new 600 series connector

TM 200 AVAILABLE SOON:

- has all features of Tm 100
- multi-rate 300/300 and 1200/75
- allows direct communication in "chat" mode

Tandata Marketing Ltd
Ref: MU/10/83
Albert Road North
Malvern, Worcs.

SOFTWARE

- terminal, Prestel and downloader software for BBC, Apple
- apply for details of other micros

Tandata

Available as a card or boxed for OEMs
Prestel is a registered Trade Mark of British Telecom

**FROM
£99**

**Save £20
on Total Price*
by sending cash or
cheque with order.**

The Edinburgh Turtle is now available from as little as £145*

Educational experts and media alike have hailed the Edinburgh Turtle as a major breakthrough in teaching aids.

This dome-shaped robot is commanded by the child - moving across the floor in exactly the way it's told. Drawing as it goes, too.

By using in-built OK Logo, your children simply program the Turtle from the Micro keyboard and learn about computer programming at the same time.

Something they won't learn from Computer games!

Because of increasing demand in Primary Schools, we can now offer the Turtle fully-interfaced with the BBC Computer at a new low Price of £165*.(£145* if you send cash with order.)

Other versions for RML, Sinclair and Apple micros and different interfaces for other

logo versions are also available. Please ask for details.

Children love the Turtle. It captures their imagination. And brings mathematics, geometry and problem-solving to life in simple, logical steps.

Only from Jessop Microelectronics Limited, (Dept. BBC), Unit 5, 7 Long Street, London E2. Telephone: 01-739 3232 and 01-729 1851.

The Edinburgh Turtle

Name _____

School _____

Address _____

Tel. No. _____



*Please add £3.50 for P&P and £22.28 VAT.

BBC10

From Page 35

The other commands make the relevant angler reel in and cast out and obey various instructions.

At the end of the game, the scores and total catches are presented in table form in Mode 7.

The program includes excellent graphics and sound effects.

Program Structure

10-130	Initialisation.
140-640	Calculates fish feeding habits.
650-830	Title page and instructions.
840-1210	Defines graphics and sounds. Draws picture of lake.
1220-1350	Sets up anglers.
1360-1400	Game starts.
1410-1440	Game loop.
1450-1610	Game ends. Score table and opportunity to play again.
1620-1770	Subroutines which draw anglers 1-4 on screen.
1780-1870	PROCcast: casts out.
1880-1990	PROCcalctime: works out when an angler will have next catch.

2000-2070	PROCgameloop: the core of the program.
2080-2320	PROCinterrupt: permits entry and execution of instructions.
2330-2450	PROCreelin: graphics and sound effects for reeling in.
2460-3170	PROCbite: float 'goes under' - user given chance to strike - if successful produces graphics and sound effects of fish being caught - species, weight, points, calculated and displayed - casts out and calculates next catch.
3180-3240	PROChelp: prints a list of command words at the bottom of the screen.
3250-3390	PRO Ctune: produces the program's jingle.

Variables

ANGLERS:	number of anglers.
ANGLER(3,2):	distance, depth and bait for each angler.

ANGLER\$(3):	name of each angler.
A0(9):	utility array used in calculating fish caught.
FISH(9,4):	maximum weight; optimum distance, depth and bait; and points scored for each species.
FISH\$(9):	names of each species of fish.
GAMEND:	the TIME when the game must end.
NCATCH(3):	time of each angler's next catch (in terms of LOOP0 - see lines 1410-1440).
OPTIMUM(2):	the optimum distance, depth and bait.
RODPOS(3):	graphics x co-ordinate for the handle of each angler's rod.
SCORE(3,3):	for each angler - number of fish caught, total weight, points gained for the former, points gained for the latter.
NO,N1,S0\$, LOOP 0,LOOP1 etc	utility variables used for various purposes

Gone Fishin' listing

```

10 REM FISHING / A GAME
   FOR UP TO 4 PLAYERS
20 REM BY DANIEL J. BISHOP
30 REM VERSION 1.0
40 REM NEEDS BBC MICRO
   MODEL B
50 ON ERROR RUN
60 *FX11.0
70 DIM FISH$(9),FISH(
   ,4),ANGLER$(3),ANGLER(3
   ,2),SCORE(3,3),OPTIMUM(
   2),NCATCH(3),RODPOS(3)
   ,A0(9)
80 DATA 269,525,781,1037
90 FOR LOOP0=0 TO 3
   : READ RODPOS(L00P0)
   : NEXT
100 DATA TENCH,CARP,RUDD
   ,ROACH,CHUB,PERCH
   ,BREAM,PIKE,GUDGEON
   ,STICKLEBACK
110 FOR LOOP0=0 TO 9
   : READ FISH$(L00P0)
   : NEXT
120 DATA 4500,8,9000,7
   ,1800,4,1800,3,3100
   ,5,1800,6,5800,7,9000
130 FOR LOOP0=0 TO 9
   : READ FISH(L00P0,0)
   ,FISH(L00P0,4)
   : NEXT
140 REPEAT
150 FOR LOOP0=0 TO 3
160 FOR LOOP1=0 TO 3
170 SCORE(L00P0,L00P1)=0
180 NEXT
190 NEXT
200 NO=RND(3)
   : IF NO=3
   THEN FISH(0,1)=1
   ELSE FISH(0,1)=0
210 NO=RND(3)
   : IF NO=3
   THEN FISH(0,2)=1
   ELSE FISH(0,2)=0
220 NO=RND(5)
   : IF NO=4
   THEN FISH(0,3)=1
   : GOTO 240
230 IF NO=5
   THEN FISH(0,3)=2
   ELSE FISH(0,3)=0
240 NO=RND(3)
   : IF NO=3
   THEN FISH(1,1)=0
   ELSE FISH(1,1)=1
250 NO=RND(3)
   : IF NO=3
   THEN FISH(1,2)=1
   ELSE FISH(1,2)=0
260 NO=RND(5)
   : IF NO=4
   THEN FISH(1,3)=1
   : GOTO 280
270 IF NO=5
   THEN FISH(1,3)=2
   ELSE FISH(1,3)=0
280 NO=RND(3)
   : IF NO=3
   THEN FISH(2,1)=0
   ELSE FISH(2,1)=1
290 NO=RND(3)
   : IF NO=3
   THEN FISH(2,2)=0
   ELSE FISH(2,2)=1
300 NO=RND(5)
   : IF NO=4
   THEN FISH(2,3)=1
   : GOTO 320
310 IF NO=5
   THEN FISH(2,3)=2
   ELSE FISH(2,3)=0
320 NO=RND(3)
   : IF NO=3
   THEN FISH(3,1)=0
   ELSE FISH(3,1)=1
330 NO=RND(3)
   : IF NO=3
   THEN FISH(3,2)=0

```

This listing was produced using a special formatter which breaks one program line over several lines of listing. When entering a line don't press Return until you come to the next line number. Full details of the formatter are in the July issue of The Micro User.

From Page 99

```

ELSE FISH(3,2)=1
340 NO=RND(5)
:IF NO=4
THEN FISH(3,3)=0
:GOTO 360
350 IF NO=5
THEN FISH(3,3)=1
ELSE FISH(3,3)=2
360 NO=RND(3)
:IF NO=3
THEN FISH(4,1)=1
ELSE FISH(4,1)=0
370 NO=RND(3)
:IF NO=3
THEN FISH(4,2)=1
ELSE FISH(4,2)=0
380 NO=RND(5)
:IF NO=4
THEN FISH(4,3)=0
:GOTO 400
390 IF NO=5
THEN FISH(4,3)=2
ELSE FISH(4,3)=1
400 NO=RND(3)
:IF NO=3
THEN FISH(5,1)=1
ELSE FISH(5,1)=0
410 NO=RND(3)
:IF NO=3
THEN FISH(5,2)=0
ELSE FISH(5,2)=1
420 NO=RND(5)
:IF NO=4
THEN FISH(5,3)=0
:GOTO 440
430 IF NO=5
THEN FISH(5,3)=2
ELSE FISH(5,3)=1
440 NO=RND(3)
:IF NO=3
THEN FISH(6,1)=0
ELSE FISH(6,1)=1
450 NO=RND(3)
:IF NO=3
THEN FISH(6,2)=1
ELSE FISH(6,2)=0
460 NO=RND(5)
:IF NO=4
THEN FISH(6,3)=1
:GOTO 480
470 IF NO=5
THEN FISH(6,3)=2
ELSE FISH(6,3)=0
480 NO=RND(3)
:IF NO=3
THEN FISH(7,1)=1
ELSE FISH(7,1)=0
490 NO=RND(3)
:IF NO=3
THEN FISH(7,2)=1
ELSE FISH(7,2)=0
500 NO=RND(5)
:IF NO=4
THEN FISH(7,3)=0
:GOTO 520
510 IF NO=5
THEN FISH(7,3)=2
ELSE FISH(7,3)=1
520 NO=RND(3)
:IF NO=3
THEN FISH(8,1)=1
ELSE FISH(8,1)=0
530 NO=RND(3)
:IF NO=3
THEN FISH(8,2)=1
ELSE FISH(8,2)=0
540 NO=RND(5)
:IF NO=4
THEN FISH(8,3)=0
:GOTO 560
550 IF NO=5
THEN FISH(8,3)=1
ELSE FISH(8,3)=2
560 NO=RND(3)
:IF NO=3
THEN FISH(9,1)=1
ELSE FISH(9,1)=0
570 NO=RND(3)
:IF NO=3
THEN FISH(9,2)=0
ELSE FISH(9,2)=1
580 NO=RND(5)
:IF NO=4
THEN FISH(9,3)=0
:GOTO 600
590 IF NO=5
THEN FISH(9,3)=1
ELSE FISH(9,3)=2
600 NO=1
:N1=1
:N2=1
610 FOR LOOP0=0 TO 4
:N0=N0+FISH(LOOP0
,1)
:N1=N1+FISH(LOOP0
,2)
:N2=N2+FISH(LOOP0
,3)
:NEXT
620 OPTIMUM(0)=INT (N0/10+0
.5)
630 OPTIMUM(1)=INT (N1/10+0
.5)
640 OPTIMUM(2)=INT (N2/10+0
.5)
650 MODE 7
660 PRINT TAB(15,9):
CHR$ (133);CHR$ (141):
"FISHING"
670 PRINT TAB(15,10):
CHR$ (133);CHR$ (141):
"FISHING"
680 PRINT TAB(6,12):
CHR$ (135):"A game
for up to four people"
690 PRINT TAB(10,14):
CHR$ (133):"By DANIEL
J. BISHOP"
700 PROCtune(1)
710 *FX15,0
720 S0$=GET$
730 CLS
:PRINT CHR$ (133):
"INSTRUCTIONS"
740 PRINT
:PRINT "You may go
fishing for up to
60 minutes. When the
time limit is up the
game ends and the
score is shown. Also,
the game may be ended
by using the command
FINISH"
750 PRINT "Other commands
which may be used
while the game is
in progress are: NEAR,
FAR, TOP, BOTTOM,
BREAD, WORM, MAGGOT
and HELP. The
default start values
are always far,
top and maggot."
760 PRINT
770 PRINT "Several commands
may be strung together
in any order."
780 PRINT
790 PRINT "When your float
goes down, hit the
spacebar to try
and catch the fish."
800 PRINT
810 PRINT "Use the spacebar
to attract the
computer's attent
ion, to speed up
casting, to catch
fish and to continue
with the program."
820 *FX15,0
830 S0$=GET$
840 MODE 5
850 ENVELOPE 1,128,11
,-1,-2,5,50,5,60,0
,-1,-2,60,60
860 ENVELOPE 2,1,0,0,0
,0,0,0,2,0,-10,-5
,120,0
870 VDU 19,1,4,0,0,0
880 VDU 19,2,7,0,0,0
890 VDU 19,3,2,0,0,0
900 VDU 24,0,160,1279,1023;
910 VDU 28,0,30,19,28
920 VDU 23,224,137,64
,20,42,21,64,21,40
930 VDU 23,225,6,6,14
,11,25,56,112,224
940 VDU 23,226,0,0,0,0
,128,128,192,224
950 VDU 23,227,224,255
,255,127,63,0,0,0
960 VDU 23,228,224,224
,224,192,128,0,0,0
970 VDU 23,229,0,0,24
,60,60,24,0,0
980 VDU 23,230,24,126
,126,255,255,126,126
,24
990 VDU 23,231,20,62,127
,62,127,62,20,0
1000 VDU 23,232,0,56,124
,124,124,56,0,0
1010 VDU 23,233,24,60,60
,0,0,0,0,0
1020 VDU 23,234,24,48,48
,48,48,16,16,0
1030 VDU 23,235,64,32,48
,48,48,48,96,0
1040 VDU 23,236,2,4,12
,12,12,12,6,0
1050 VDU 23,237,192,192
,0,0,0,0,0,0
1060 VDU 23,238,16,4,12
,56,146,40,104,16
1070 MOVE 0,1024
:MOVE 0,400
:GCOL 0,1
:PLOT 85,1280,1024
:PLOT 85,1280,400
1080 MOVE 0,400
:GCOL 0,3
:PLOT 85,0,160
:MOVE 1280,400
:PLOT 85,1280,160
1090 FOR LOOP0=0 TO 1279
STEP 5

```


DISC DRIVE OWNERS!

Still playing games?
Realise the potential of your DISC DRIVES
Learn to handle
RANDOM ACCESS FILES
and start creating for yourself

AN INTRODUCTION TO RANDOM ACCESS FILING ON THE BBC MICRO

This 101 page publication is available NOW and is supplied complete with DEMONSTRATION DISC (40 track) containing an example STOCK CONTROL system and a PERSONNEL system.

Price £12.50 complete
MISSING - PRESUMED LOST ...

Your favourite program is deleted from your disc by accident - But WAIT!

UTILITIES 1 is the answer - two programs designed to help you.

1. DISCMAP

A unique 'picture' of the contents of your disc helps you to spot where 'missing' programs are waiting to be recovered. Incorporates full details of all catalogued programs and a PRINTER option.

2. DELETED FILE RECOVERY

Helps you recover ALL or PART of a deleted BASIC program or Machine Code program. INVALUABLE for recovering data from discs with corrupted catalogues. Incorporating a SECTOR SEARCH which will display sector contents in a uniquely readable way!

Supplied on disc (40 track)

£8.95 complete with FULL DOCUMENTATION

THE COMPUTER ROOM
206 Main Street, Newthorpe, Notts.

CONTEX

Professional Software for the BBC Computer

TYPING TUTOR 32K

Specifically designed for the BBC micro the 90 smoothly graded lessons and the free form option teach and encourage fast touch typing. Intelligently checks for errors, monitors progress, times (WPM) and makes recommendations. Audio key feedback, metronomic pacing, clock and revised performance options. Auto keyboard/finger display for every lesson. Add own lessons if required. 12 page instruction booklet.

Cassette £9.99 inc.
Disc £11.99 inc.

Lesson 75, line 1 23

Copy text as it is presented
Timing starts when you start
and stops when req'd no. of
characters typed.

I am delighted to tell you that I have
I am delighted to tell you that I have

Your time is 20 words per minute
Your error rate was 8%

Press the SPACE BAR to continue

SPREADSHEET 32K

A complete and versatile 'calc' program and tutorial. Models over 1,000 cells using up to 26 columns and 99 rows. Equations, constants, data or text in any cell. Emphasis on ease of use. 10 chr columns; 9 digit accuracy; print; row & col insert or delete; functions; colour; variables; save & restore; copy cell; auto replicate col & row; auto formulae adjust; scroll; search; help; evaluate; limits. 20 page instruction booklet.

Cassette £9.99 inc.
Disc £11.99 inc.

Fast delivery. Cassette based for models A or B with 32K, all operating systems, may be used with discs.

CONTEX COMPUTING (B10)

15 Woodlands Close, Cople, Bedford MK44 3UE.

Command (? for help)

(13730)	a	b	c
1 Rent	100	100	110
2 Rates	50	55	55
3 Phone	45	45	45
4 Post	35	40	45
5			
6 Total	230	240	255
7			
8 infla'n	46	48	51
9			
10 Final	276	288	306
11			
12			
13			
14			
15			
16			
17			
18			
19			

B.B.C. ACORN COMPUTERS IN LEICESTER

Specialists on hardware and software

* Fully authorised ACORN-BBC Dealer *

** Complete after sales service - repairs and maintenance contracts**

★ ANALYSE DISC ★

- recover information from damaged discs.
- copy protected discs.
- protect your own valuable software.
- full documentation giving details of disc organisation in addition to how to use ANALYSE.

£15.00 inc. VAT and p&p

Plus four utility programs including disassembler, merge and repeat programs
£18.00

★ SCREEN DUMP ROM ★

- copy any screen in any mode.
- compatible with MX80, FX80, RX80, CP80, GP100, GP250, etc.
- fast machine code dumps.
- screen magnification factors x1, x2 or x4.
- plugs into page ROM socket.

£15.00 inc. VAT and p&p

BBC MODEL B MICROCOMPUTERS IN STOCK

DAC Disc Drives **£212.00** inc. VAT
Disc Interface Kits **£92.00** inc. VAT
A to B Upgrade Kits **£66.70** inc. VAT

We have a wide selection of Printers including EPSON FX80, RX80, Shinwa CTI CP80, Seikosha GP100, GP250 etc. in stock prices from £200.

14" Colour Monitors **£269.00** BBC Paddles **£14.00**
Games Joysticks **£25.00** Shinwa CP80 **£318.00**
Data Cassette Recorders **£39.00** Epson FX80 **£429.00**
12" Monochrome Monitor **£100.00** Epson RX80 **£318.00**

Most of the best software in stock including Acornsoft, Programpower, Computer Concepts, Superior Software, Nibblesoft, Fisher-Marriott etc.

A wide selection of Books, Magazines and accessories.

See a demonstration of the PL Digitiser - **£120.00**


PHARMACISTS - call for a demonstration of our high-speed, comprehensive label printing system.

All our prices include VAT but please add £5.00 postage for any major item (computers, monitors, discs etc.)

Please call and visit our new showrooms at:-

D.A. COMPUTERS LTD.,
104 London Road, Leicester.
(2 mins from Railway Station). Closed Mondays
Telephone: (0533) 549407

A SUPERB HARD COVER for your BBC Micro

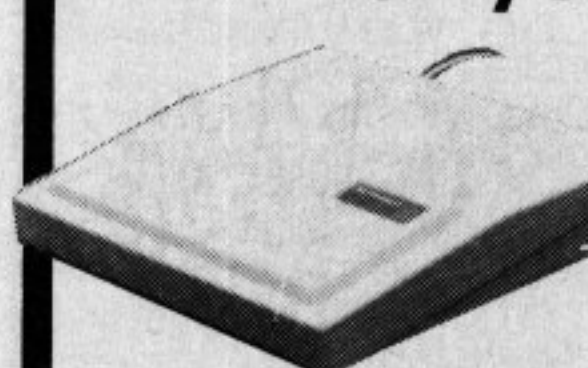

NEW

£10.95

(VAT included)

+ £1.55

Post & Packing
per cover

- ★ ENGINEERED IN TOP QUALITY HIGH IMPACT RIGID ABS. - VERY TOUGH
- ★ SUPER TEXTURED FINISH IN CREAM TO TONE WITH YOUR BBC MICRO
- ★ LOOKS GOOD IN THE HOME
- ★ CUSHIONED ON FOAM PADS
- ★ GIVES OPTIMUM PROTECTION
- ★ IDEAL FOR SCHOOLS

Please send me covers for the BBC Micro.

I enclose a cheque/P.O. for £

Name

Address

..... Code

Please allow 28 days for delivery.

Send to:

GRANGE CLOSE
SANDBACH
CHES.
CW11 9ET.

B10

Tekform

Gone Fishin' listing

From Page 100

```

1100 MOVE LOOP0,400
      :N0=RND(32)
      :N1=RND(5)-1
      :MOVE LOOP0+N1,400+N0
      :PLOT 85,LOOP0+4,400
1110 NEXT
1120 FOR LOOP0=0 TO 2
1130 IF LOOP0=0
      THEN N0=0
1140 IF LOOP0=1
      THEN N0=820
1150 IF LOOP0=2
      THEN N0=1177
1160 FOR LOOP1=0 TO 10
1170 VDU 5
      :GCOL 0.3
      :MOVE RND(100)+N0
      ,RND(80)+400
      :VDU 224,4
1180 NEXT
1190 NEXT
1200 COLOUR 2
      :PRINT "Welcome to
      Lake Beeb"
1210 PROCtune(0)
1220 *FX15.0
1230 INPUT "How many players
      ",S0$
1240 ANGLERS=INT (VAL (S0$))
      :IF ANGLERS<1 OR ANGLER
      S>4
      THEN CLS
      :PRINT "1-4 players
      only!"
      :GOTO 1230
1250 CLS
1260 INPUT "How long (1-60)"
      ,S0$
1270 N1=INT (VAL (S0$))
      :IF N1<1 OR N1>60
      THEN CLS
      :PRINT "1-60 minutes
      only!"
      :GOTO 1260
1280 GAMEND=6000*N1
1290 FOR LOOP0=0 TO ANGLERS-1
1300 CLS
      :PRINT "What is your
      name."
      :PRINT "player ";LOOP0+
      1;
      :INPUT S0$
      :IF S0$=""
      THEN GOTO 1300
      ELSE ANGLER$(LOOP0)=
      LEFT$(S0$,9)
1310 ON LOOP0+1 GOSUB 1620
      ,1660 ,1700 ,1740
1320 ANGLER(L00P0,0)=1
      :ANGLER(L00P0,1)=1
      :ANGLER(L00P0,2)=2
1330 PROCcast(L00P0,1)
1340 PROCcalctime(L00P0
      ,1)
1350 NEXT
1360 CLS
      :PRINT "Good luck!"
1370 *FX15.0
1380 S0$=INKEY$ (300)
1390 CLS
1400 TIME =0
      :LOOP0=1
1410 REPEAT
1420 PROCgameloop
1430 LOOP0=LOOP0+1
1440 UNTIL TIME >GAMEND
      OR S0$="FINISH"
1450 CLS
      :PRINT "Game Over!"
1460 PROCtune(0)
1470 *FX15.0
1480 N0$=INKEY$ (500)
1490 MODE 7
1500 PRINT TAB(8,2);
      CHR$(134);CHR$(141);
      "FISHING SCORE TABLE"
1510 PRINT TAB(8,3);
      CHR$(134);CHR$(141);
      "FISHING SCORE TABLE"
1520 PRINT
      :PRINT "NAME","FISH"
      ,"WEIGHT","TOTAL"
      :PRINT
1530 FOR LOOP0=0 TO ANGLERS-1
1540 PRINT ANGLER$(LOOP0)
      ,;SCORE(L00P0,0);"
      fish",;SCORE(L00P0
      ,2);" g"
1550 PRINT TAB(10);SCORE(L00
      P0,1);" pts",;SCORE(L00
      P0,3);" pts",;SCORE(L00
      P0,1)+SCORE(L00P0
      ,3);" pts"
      :PRINT
1560 NEXT
1570 *FX15.0
1580 PRINT
      :INPUT "Do you wish
      to play again",S0$
1590 IF S0$(">")="Y" AND S0$("<")
      "YES"AND S0$("<")="N"
      AND S0$(">")="NO"
      THEN GOTO 1490
1600 UNTIL S0$="N" OR S0$=
      "NO"
1610 END
1620 VDU 5
1630 MOVE 224,296
      :GCOL 0.2
      :VDU 225,226
      :MOVE 224,264
      :VDU 227,228
      :MOVE 246,270
      :GCOL 0.0
      :VDU 230
      :MOVE 246,270
      :GCOL 0.2
      :VDU 229
      :MOVE 270,258
      :GCOL 0.0
      :VDU 237
1640 VDU 4
1650 RETURN
1660 VDU 5
1670 MOVE 480,296
      :GCOL 0.0
      :VDU 225,226
      :MOVE 480,264
      :VDU 227,228
      :MOVE 495,270
      :GCOL 0.2
      :VDU 231
1680 VDU 4
1690 RETURN
1700 VDU 5
1710 MOVE 736,296
      :GCOL 0.1
      :VDU 225,226
      :MOVE 736,264
      :VDU 227,228
      :MOVE 753,270
      :GCOL 0.2
      :VDU 232
      :MOVE 751,276
      :VDU 233
1720 VDU 4
1730 RETURN
1740 VDU 5
1750 MOVE 992,296
      :GCOL 0.1
      :VDU 225,226
      :MOVE 992,264
      :VDU 227,228
      :MOVE 1007,275
      :GCOL 0.0
      :VDU 232
1760 VDU 4
1770 RETURN
1780 DEF PROCcast(N0,N1)
1790 SOUND 1,1,200,12
1800 GCOL 0,0
1810 MOVE RODPOS(N0),300
      :DRAW RODPOS(N0),700
1820 GCOL 0.2
1830 IF N1=0
      THEN N1=600
      ELSE N1=950
1840 FOR LOOP1=0 TO 1500
      :NEXT
1850 SOUND 0,-5,6,1
      :SOUND 0,-5,4,1
1860 VDU 5
      :MOVE RODPOS(N0)+100
      ,N1
      :VDU 237
      :VDU 4
1870 ENDPROC
1880 DEF PROCcalctime(N0
      ,N1)
1890 LOCAL LOOP0,N3
1900 N3=1
1910 FOR LOOP0=0 TO 2
1920 IF OPTIMUM(L00P0)=ANGLE
      R(N0,L00P0)
      THEN N3=N3+1
1930 NEXT
1940 NCATCH(N0)=INT (N1+(1/N
      3*20*(RND(1)+0.5)))
1950 LOOP0=0
1960 REPEAT
1970 IF NCATCH(N0)=NCATCH(L0
      OP0) AND N0("<")LOOP0
      THEN NCATCH(N0)=NCATCH(
      N0)+1
      ELSE LOOP0=LOOP0+1
1980 UNTIL LOOP0=ANGLERS
1990 ENDPROC
2000 DEF PROCgameloop
2010 CLS
2020 LOOP1=-1
      :REPEAT
      :LOOP1=LOOP1+1
      :UNTIL NCATCH(L00P1)=LO
      OP0 OR LOOP1=ANGLERS-1
2030 IF NCATCH(L00P1)=LOOP0
      THEN PROCbite(L00P1)
2040 *FX15.0
2050 S0$=INKEY$ (300)
2060 IF S0$(">")=""
      THEN PROCinterrupt
2070 ENDPROC
2080 DEF PROCinterrupt
2090 INPUT "Who is that"

```


EXPOSED!

THE JUKI 6100
DAISYWHEEL
PRINTER


OFFERED
AT AN ALMOST
UNPRINTABLE
PRICE

£339.95

EXCLUDING VAT

FREE
CARRIAGE


- 18CPS - Bi-Directional Logic Seeking
- 10, 12, 15 CPI + Proportional Spacing
- "Drop in" Daisywheel - Triumph Adler Compatible
- Supports all Wordstar features
- Diablo protocols - IBM Selectric ribbon
- 2k Buffer as standard - 100 character Daisywheel

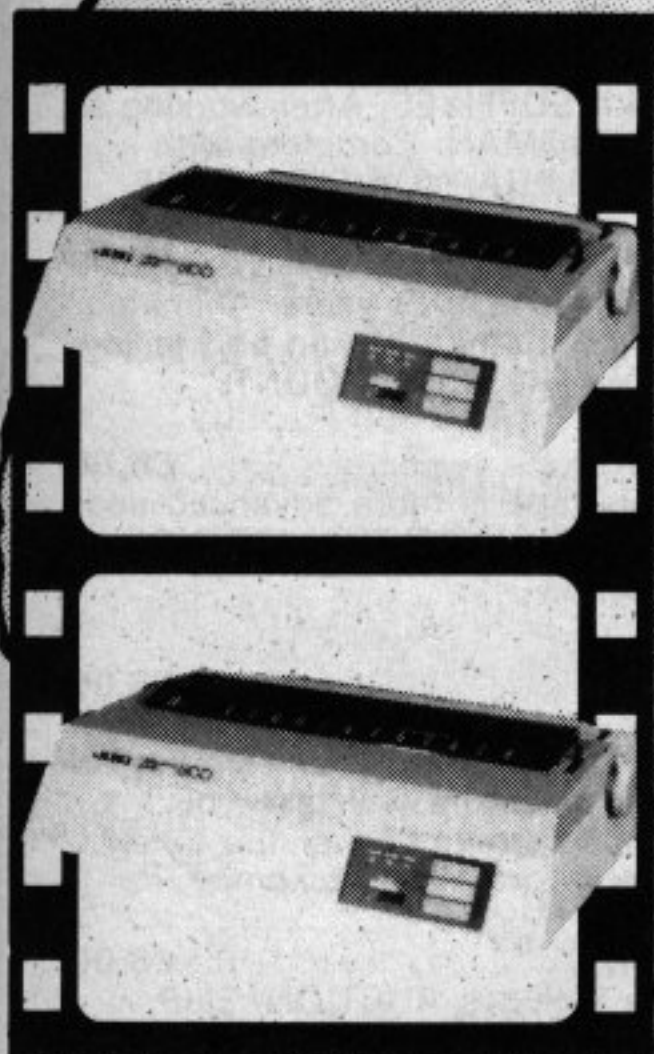

OAKLEAF COMPUTERS LIMITED



ACORN SPECIALISTS



121, Dudley Road,
Grantham,
Lincs.

0476 76994/70281

100, Boughton,
Chester,
Cheshire.

0244 310099

DISCOUNT SOFTWARE SUPER SALE

A FEW EXAMPLES FROM OUR GROWING RANGE

	Retail	Our Prices
Great Britain Limited - S. Hessel You are the Prime Minister of Britain, you select the party you represent, your aim is to stay in office as long as possible. You control inflation, unemployment and other economic problems. You must remain popular because election night is coming up.	£5.95	£4.69
Road Runner - Superior Software Full version of arcade game. Features include: scrolling screen, radar, fuel gauge, smoke screens etc. Keyboard or joysticks.	£7.95	£6.29
747 - Dr. Soft Full blown simulation of taking off, flying and landing a jumbo. Large dials, pointers, digital readouts, written by a pilot. Excellent piece of software which includes separate briefing program, maps, etc.	£7.95	£6.29
Logo II - Computer Concepts First implementation of graphics language LOGO that is now very popular in America.	£11.50	£9.69
Beebmunch - IJK High resolution graphics and sound make this a great version of packman. Includes ghosts, fruit etc.	£6.50	£4.89

Prices include VAT and P&P.

The prices above are for ONE cassette, buy more and get up to 40% DISCOUNT on retail.

Cassettes are in stock and available for quick dispatch by 1st class post.

For catalogue (and orders) send name and address to:

Ricksoft, Dept DS, 78 Warren Drive, Hornchurch, Essex RM12 4QX.
Tel: (04024) 47722

Simonsoft

Specialists in High Quality Software for
the BBC Microcomputer

DISASSEMBLER (A/B) - a 'smart' disassembler that will generate fully labelled assembly listings of any machine code program - data is automatically differentiated from code and displayed together with its ASCII equivalent - the assembly listing can be saved in *EXEC format and subsequently incorporated into user programs - supplied with full instructions.

Without doubt the most powerful and flexible disassembler available
Disassembler £7.95

EMULATOR (B) - a new concept in machine code programming tools! Emulator is a machine code INTERPRETER which allows you to write and debug machine code as easily as BASIC - fully compatible with disassembler so that disassembled programs can be altered and 'emulated' - features single step, breakpoints register display, edit modes, data display mode etc etc - since the machine code is interpreted there is full protection from errors. Probably the most useful machine code programming tool.

Emulator £8.45

BASIC GOODIES (A/B) - a set of useful BASIC debugging routines saved in *EXEC format and fully documented - includes PROC/FN LISTER which lists the lines where procedures and functions are defined together with name, parameters etc - VARIABLE LISTER displays the current values of all or selected variables; very useful for debugging and demonstrations - SUPER REPORT intercepts BASIC errors and returns the message in a string variable so that error messages can be more flexibly reported - and more besides.

Basic Goodies £5.95

Prices are fully inclusive (for disc version add £3.00 and state single or double density)

All programs are fully guaranteed and OS 0.1 to 1.2 compatible.

DEALER ENQUIRIES WELCOME

Simonsoft

Front Street, Topcliffe, North Yorkshire, YO7 3RJ.

GLENGARY SOFT

"MICROQUEST" £5.95 Fascinating quest through the 'BEEB'. Find your way by using your GUIDE. This program will help you learn more about your computer as the quest progresses.

"SORCERERS KINGDOM" £6.95 Can you defeat the Black Sorcerer and the dreaded Trolls, find the treasure and escape from the Mountain of Mirth? Will you plummet down the Falls of Death or be eaten by a Sabre-toothed Tiger? To find the answers play this adventure.

"CONCENTRATION" £6.95 Battle of wits for two players, or play against computer. In the latter case the computer automatically regulates its own skill level in accordance with that of the human. This original game is based on the card game of pairs.

"FORCASTER" £4.95 To predict your football pools. Update info weekly with latest results, and save onto tape. 7 ways to predict.

"ARITHMETIC" £6.95 This program allows counting, multiplication, division, subtraction, addition and tables. Difficulty is variable by altering parameters at start of program. All ages up to 12.

"DATABASE" £7.95 An excellent program to suit your filing needs. Allows you to sort, search, add, edit, save, print-out.

"HOMEDATA" £6.95 Allows you to calculate and predict your monthly finances, and save on tape.

"ANALYSIS 1" £6.95 O-level chemical analysis.

"ANALYSIS 2" £7.95 A-level. A very comprehensive program for A-level students. Very well documented.

"HOP & SPELL" £4.95 Spelling game for 4/5 year olds.

"EASIER ENVELOPES" £4.95 Design and program your envelopes with this easy to use program.

- ALL PRICES FULLY INCLUSIVE -

The above programs run on all O.S. and 32K.

40% ROYALTIES

Paid to the writers of high quality original software, including:- Games, Educational, Business & Domestic for use on the 'Beeb'.

**GLENGARY
SOFT**

9 HIGHFIELD CRESCENT,
HORNCHURCH, ESSEX
RM12 6QB
TEL: HORNCHURCH
(04024) 40864

MP

B.B.C. MICRO SOFTWARE**THREE GREAT ADVENTURE GAMES*****NEW*
BLUE DRAGON**

Somewhere in a strange and dangerous land lies a fabulous treasure guarded by a fierce dragon. Can you survive the perils that await and recover the treasure or will you meet a nasty end!! What is making terrible slurping noises deep underground? And what use is the strange black cloud? Play the game and find out.

"SURVIVOR"

The year is 1910 you are sailing on a steamer bound for Borneo when there is an explosion and the ship sinks. Shipwrecked on a tropical island, can you survive and escape back to civilisation or will you end up in someones cooking pot!! There is more than one ending to this game, not all of them bad!

"FIRIENWOOD"

An evil wizard has captured the magic golden bird of paradise and imprisoned it in a weird castle in the middle of the enchanted Firiwood. Your quest is to find the bird and set it free, in return the bird will give you health and prosperity. Beware! Many perils lie before you and every move is fraught with danger!!

Each game is priced at £7.48 on cassette or £10.50 on disc.

All the games are text only and written in machine code for high speed. They require 32K and run on all operating systems. Prices include VAT and Postage within UK. Send SAE for full range of programs and price list or ask your local dealer.

Trade enquiries welcome.

**ALL PRICES INCLUDE POSTAGE. CHEQUES
AND POSTAL ORDERS PAYABLE TO: M.P. SOFTWARE.**

MP

SOFTWARE & SERVICES

DEPT. BM, 165 Spital Road,
Bromborough, Merseyside L62 2AE.
Telephone: 051-334 3472

BBC SOFTWARE

QUALITY SOFTWARE PRODUCED BY PROFESSIONALS.

EDUCATIONAL

Our educational software is used in hundreds of schools throughout Great Britain.

FUN WITH WORDS 32K £8.00

Start your fun with alphabet puzzle in GUESS A LETTER. Continue your play as you learn about VOWELS, know the difference between THERE and THEIR and have games with SUFFIXES. After working so hard reward yourself with games of HANGMAN. Complete with graphics and sound. The tape includes ALPHA, VOWELS, THERE, SUFFIXES, and HANGMAN.

EDUCATIONAL - 1 32K £8.00

Hours of fun and learning for children aged 5 to 9 years. Animated graphics will encourage children to enjoy maths, spelling and telling the time. The tape includes MATH1, MATH2, CUBECOUNT, SHAPES, MEMORY, SPELL and CLOCK.

EDUCATIONAL - 2 32K £8.00

Although similar to Educational - 1 this tape is more advanced and aimed at 7 to 12 year olds. The tape includes MATH1, MATH2, AREA, MEMORY, CUBECOUNT and SPELL.

*** GAMES & UTILITIES****KATAKOMBS 32K £8.00**

Are you cunning enough to discover and seize the treasure in the Katakombs AND return alive? What and where are your enemies? Can you outwit them? Yes? Then your adventure will take you through unending forests, beside tumbling streams, over the lonely plains to desolate ruins and finally to the tortuous Katakombs. Be prepared for anything!

GAMES OF LOGIC & CUNNING 32K £8.00

For children and adults alike. The tape includes AUCTION, FLIP, REVERSE, TELEPATHY and HEXA15.

SUPERLIFE 32K £6.90

Fast (machine code) version of a popular 'Game of Life' in a large universe.

UTILITIES 16/32K £8.00

Behind the mundane title lies an assortment of useful procedures and functions which can save you hours/days of programming effort: date conversion, input and validation routines, graphic routines (cube, rectangle, etc) search, sort and many more.

*** SPECIAL OFFER *** Any 3 cassettes for £20.00

Add 50p per order for p/p.

Cheque/P.O. to:

**GOLEM LTD., Dept B,
77 Qualitas, Bracknell, Berks, RG12 4QG. Telephone:
(0344) 50720**

BBC MICRO COMPUTER CASES BY ANTLER.



Antler, the foremost name in British luggage announce the D618 - BBC micro computer case:- External dimensions 22" x 16" x 6" deep (560mm x 450mm x 150mm)

- * High impact quality rigid ABS shells give excellent wearing characteristics and protection.
- * High density foam interiors with hard wearing black brush nylon.
- * Exclusive hardened aluminium box girder frame with radius corners for additional strength.
- * Steel toggle locks with lever action draw the frame tightly together. This with the tongue and groove frame protects against dust and moisture.
- * Double handles bolted through the frame provide a strong secure anchorage.
- * Cases carry after sales service and 2 years guarantee covering materials and faulty workmanship.

INTERIOR LAYOUT

Interior has profile cut foam to provide a firm grip to the computer, tape machine and 9 cassettes. Hand grip access slots for easy insertion and withdrawal of equipment. Foam protection beneath equipment.

Separate spacious compartment with rigid securing top for leads, 4 block 13A connector, extras - manuals, books or cassettes, plus others.



ANTLER THE BEST
OF BRITISH LUGGAGE

£49.90 + £2.50 carr.
(incl. VAT)

VIZ: Toolcases, cases for samples and sales display, carrying disc packs, printed circuit boards and many others.

SPECIALIST CASES DIVISION
manufacturers a range of ABS cases -

Contact us
for your particular needs and further information.
Gordon Ashworth - Manager, Specialist Cases Division,
Antler Ltd, Bury, Lancs. BL9 9EE Tel: 061-764 5241.

Name _____

Company _____

Address _____

Phone No. _____

antler
OF PALL MALL

From Page 102

```

.S0$
2100 S0$=LEFT$(S0$,9)
2110 LOOP1=-1
      :REPEAT
      :LOOP1=LOOP1+1
      :UNTIL ANGLER$(LOOP1)=5
      0$ OR LOOP1=ANGLERS-1
2120 IF ANGLER$(LOOP1)<>S0$
      THEN GOTO 2320
2130 N0=LOOP1
2140 CLS
      :PRINT "OK":
      :INPUT LINE S0$
2150 IF S0$="HELP"
      THEN PROCHELP
      :GOTO 2320
2160 IF S0$="FINISH"
      THEN GOTO 2320
2170 N1=ANGLER(N0,0)
2180 S0$=S0$+STRING$(10
      ," ")
2190 N2=0
2200 IF INSTR(S0$,"NEAR")>0
      THEN ANGLER(N0,0)=0
      :N2=1
      :GOTO 2220
2210 IF INSTR(S0$,"FAR")>0
      THEN ANGLER(N0,0)=1
      :N2=1
2220 IF INSTR(S0$,"TOP")>0
      THEN ANGLER(N0,1)=1
      :N2=1
      :GOTO 2240
2230 IF INSTR(S0$,"BOTTOM")>
      0
      THEN ANGLER(N0,1)=0
      :N2=1
2240 IF INSTR(S0$,"BREAD")>0
      THEN ANGLER(N0,2)=0
      :GOTO 2280
2250 IF INSTR(S0$,"WORM")>0
      THEN ANGLER(N0,2)=1
      :GOTO 2280
2260 IF INSTR(S0$,"MAGGOT")>
      0
      THEN ANGLER(N0,2)=2
      :GOTO 2280
2270 IF N2=0
      THEN GOTO 2320
2280 PROCReelin(N0,N1)
2290 FOR LOOP1=0 TO 2000
      :NEXT
2300 PROCcast(N0,ANGLER(N0
      ,0))
2310 PROCcalctime(N0,LOOP0)
2320 ENDPROC
2330 DEF PROCReelin(N0
      ,N1)
2340 IF N1=0
      THEN N1=600
      ELSE N1=950
2350 GCOL 0.1
2360 VDU 5
      :N2=RODPOS(N0)+100
2370 FOR LOOP1=700 TO 451
      STEP -3
2380 SOUND 1,-15,100.0
      :SOUND 1.0,0.1
2390 MOVE RODPOS(N0),700
      :DRAW RODPOS(N0),LOOP1
2400 MOVE INT (N2),INT (N1)
      :GCOL 0.2
      :VDU 237
      :MOVE INT (N2),
      INT (N1)
      :GCOL 0.1
      :VDU 237
2410 IF N2>RODPOS(N0)
      THEN N2=N2-0.4
2420 IF N1>400
      THEN N1=N1-1.7
2430 NEXT
2440 VDU 4
2450 ENDPROC
2460 DEF PROCbite(N0)
2470 IF ANGLER(N0,0)=0
      THEN N1=600
      ELSE N1=950
2480 GCOL 0.1
      :VDU 5
      :MOVE RODPOS(N0)+100
      ,N1
      :VDU 237,4
2490 *FX15,0
2500 S0$=INKEY$ ((RND(150)+1
      0))
2510 IF S0$<>" "
      THEN GOTO 2560
2520 MOVE RODPOS(N0)+100
      ,N1
      :GCOL 0.2
      :VDU 5,237,4
2530 N2=RND(4)
      :IF N2>1
      THEN FOR LOOP1=0
      TO 1500
      :NEXT
      :GOTO 3150
2540 N2=RND(3000)+500
      :FOR LOOP1=0 TO N2
      :NEXT
2550 GOTO 2480
2560 FOR LOOP1=700 TO 440
      STEP -4
2570 SOUND 1,-15,100.0
      :SOUND 1.0,0.1
2580 MOVE RODPOS(N0),700
      :GCOL 0.1
      :DRAW RODPOS(N0),LOOP1
2590 NEXT
2600 N2=100
2610 VDU 5
2620 FOR LOOP1=N1 TO 500
      STEP -2
2630 SOUND 0,-1*RND(5)
      ,100.1
2640 IF N2>0
      THEN N2=N2-0.25
2650 N3=RND(20)+RODPOS(N0)+
      INT (N2)
      :N4=RND(20)+LOOP1
      :N5=RND(20)
2660 GCOL 0.2
      :MOVE N3,N4
2670 IF N5<9
      THEN VDU 224
      :GCOL 0.1
      :MOVE N3,N4
      :VDU 224
2680 IF N5>=9 AND N5<18
      THEN VDU 238
      :GCOL 0.1
      :MOVE N3,N4
      :VDU 238
2690 IF N5=18
      THEN VDU 234
      :GCOL 0.1
      :MOVE N3,N4
      :VDU 234
      :SOUND 0.2,4.3
2700 IF N5=19
      THEN VDU 235
      :GCOL 0.1
      :MOVE N3,N4
      :VDU 235
      :SOUND 0.2,4.3
2710 IF N5=20
      THEN VDU 236
      :GCOL 0.1
      :MOVE N3,N4
      :VDU 236
      :SOUND 0.2,4.3
2720 MOVE N3-40,N4-40
      :GCOL 0.2
      :VDU 237
      :MOVE N3-40,N4-40
      :GCOL 0.1
      :VDU 237
2730 NEXT
2740 GCOL 0.2
      :MOVE N3,N4
      :VDU 235,4
2750 FOR LOOP1=0 TO 9
2760 A0(LOOP1)=0
2770 FOR LOOP2=0 TO 2
2780 IF ANGLER(N0,LOOP2)=FIS
      H(LOOP1,LOOP2+1)
      THEN A0(LOOP1)=A0(LOOP1
      )+1
2790 NEXT
2800 NEXT
2810 N1=A0(1)
2820 FOR LOOP1=1 TO 9
2830 N1=N1+A0(LOOP1)
      :A0(LOOP1)=N1
2840 IF LOOP1=8 OR LOOP1=9
      THEN N1=N1+3
      :A0(LOOP1)=N1
2850 NEXT
2860 N2=RND(N1)
2870 IF N2<=A0(0)
      THEN N2=0
      :GOTO 2970
2880 IF N2<=A0(1)
      THEN N2=1
      :GOTO 2970
2890 IF N2<=A0(2)
      THEN N2=2
      :GOTO 2970
2900 IF N2<=A0(3)
      THEN N2=3
      :GOTO 2970
2910 IF N2<=A0(4)
      THEN N2=4
      :GOTO 2970
2920 IF N2<=A0(5)
      THEN N2=5
      :GOTO 2970
2930 IF N2<=A0(6)
      THEN N2=6
      :GOTO 2970
2940 IF N2<=A0(7)
      THEN N2=7
      :GOTO 2970
2950 IF N2<=A0(8)
      THEN N2=8

```


Gone Fishin' listing

From Page 105

```

:GOTO 2970
2960 N2=9
2970 N1=RND(FISH(N2,0))
2980 FOR LOOP1=0 TO 2
2990 N3=RND(4)
      :IF N3>1
      THEN N1=INT (N1/2)
3000 NEXT
3010 IF N1<1
      THEN N1=1
3020 N3=INT ((N1/100)+0.5)
3030 PRINT ANGLER$(N0):
      " caught"
3040 PRINT "a ";FISH$(N2)
      :PRINT "wt ";N1:"g
      :";N3+FISH(N2,4):
      "pts":
3050 SCORE(N0,0)=SCORE(N0
      ,0)+1
3060 SCORE(N0,1)=SCORE(N0

```

```

      .1)+FISH(N2,4)
3070 SCORE(N0,2)=SCORE(N0
      ,2)+N1
3080 SCORE(N0,3)=SCORE(N0
      ,3)+N3
3090 *FX15,0
3100 S0$=INKEY$ (800)
3110 GCOL 0,1
      :PLOT 0,-64,0
      :VDU 5,235,4
3120 *FX15,0
3130 S0$=INKEY$ (300)
3140 PROCcast(N0,ANGLER(N0
      ,0))
3150 PROCcalctime(N0,LOOP0)
3160 CLS

```

*This listing is included in
this month's cassette tape
offer. See order form on
Page 93.*

```

3170 ENDPROC
3180 DEF PROChele
3190 CLS
      :COLOUR 3
      :PRINT "Commands:"
3200 COLOUR 2
      :PRINT " NEAR FAR
      TOP BOTTOM BREAD
      WORM MAGGOT FINISH":
3210 *FX15,0
3220 S0$=INKEY$ (2000)
3230 CLS
3240 ENDPROC
3250 DEF PROCtune(N0)
3260 ENVELOPE 3,128,0,0
      ,0,0,0,0,12,-2,-1
      ,-2,126,106
3270 DATA 121,1,129,1,137
      ,1,145,2,145,2,145
      ,1,117,1,121,1,129
      ,1,137,2,137,2
3280 DATA 137,1,109,1,117
      ,1,121,1,129,2,129
      ,2,129,1,129,1,121
      ,1,117,1,109,1
3290 IF N0=0
      THEN N0=11
      :RESTORE 3280
3300 IF N0=1
      THEN N0=22
      :RESTORE 3270
3310 FOR LOOP0=1 TO N0
3320 IF LOOP0=22
      THEN N3=255
      ELSE N3=2
3330 READ N1,N2
3340 SOUND 0,3,3,N3
3350 SOUND 1,3,N1,N3
3360 FOR LOOP1=0 TO 300*N2
      :NEXT
3370 NEXT
3380 FOR LOOP1=0 TO 2500
      :NEXT
3390 ENDPROC

```

MICROGAMES

Patrick Bossert (Author of **You Can Do The Cube**)
and Philippa Dickinson

An electrifying selection of easily programmable, original games for BBC (models A and B), RML (380Z and 480Z) ZX Spectrum, and ZX 81
£1.50 (illustrated)

Starting 1 September A Micro competition with macro prizes

PUFFIN YOUNG PROGRAMMERS OF THE YEAR

in conjunction with Sinclair Research and the National Association of Youth Clubs



- ★ Three age ranges
- ★ 9 Sinclair ZX Spectrum or equivalent software to be won
- ★ 50 runner-up prizes of Penguin micro computer books in each section

Build up on your BASIC now...
the search is on!

Entry forms: Children's Marketing Dept.,
(Sincomp), Penguin Books Ltd, 536 King's Road, London SW10 0UH



HARDWARE AND SOFTWARE **Micro-Aid** FOR THE BBC MICRO

SOFTWARE - Programs that are guaranteed to run! Save hours of work and worry with these utilities and practical programs on cassette or disc. Orders are posted the same day.

102	CASHBOOK	Double entry 4 columns with accounts & analysis	£ 7.95	B
102d	CASHBOOK	Full disc version. 1100 items on 100k disc	£13.95	B
103	LEDGER	Complements CASHBOOK with ageing & analysis	£ 7.95	B
105	MAILING	Holds 218 addresses. Alpha & post code sorts, fast search any format labels & delete, add and amend.	£ 7.95	B
106	PAYROLL (W or M)	In 2 parts to handle weekly or monthly (state which) PAYE & NI for 100 employees. Fully supported.	£17.95	B
106a	Manual	30 page A4 manual with examples. Extra. No VAT.	£ 2.50	
107	MEMO-CALC	Database/Calcsheet with up to 255 columns, string or numeric data, sorts, searches, calculations, with automatic fully formatted printout facility	£ 9.95	B
107a	Manual	20 page A4 manual with examples. Extra. No VAT.	£ 2.00	
201	GAMES 1	5 Card, Minefield, Darts, Pontoon & Mrmidon.	£ 4.95	B
203	HANGMAN	Word game in English, French, German, Italian, Spanish	£ 7.95	B
301	BANNER	Print large text and graphics on paper for displays	£ 2.95	A/B
302	DISTANCES	Three graphic maps of U.K., EUROPE & the WORLD Calculate the distance between any 2 places	£ 4.95	B
303	FLAGS	98 full colour flags of the world with questions	£ 4.95	B
304	STATPAK	Statistics package giving over 30 results	£ 9.95	B
504	PROCAID	includes SEARCHBAS to search a BASIC program and alter it, PROCVAR to list variables in a BASIC program & PROCFLUSH to clear resident integers in RAM	£ 3.45	A/B
505	UTILITY-A	Our best selling tape includes PROCAID, DEFCHR to design, display & store graphic characters, SORTM/C a very fast machine code numeric sort, SORTBAS The undisputed fastest BASIC sort routine	£ 5.95	A/B
600	FORTH	'79 FORTH second language ROM for either OS	£34.74	B
601	LOGO-FORTH	Advanced Turtle Graphics Language ROM	£55.00	B
602	PASCAL-T	Structured language ROM with compiler-interpreter	£55.00	B
603	XCAL	Computer Assisted Learning ROM	£65.00	B
605	WORDWISE	Superb fast & easy Wordprocessor in ROM	£34.74	B
606	BEEB-CALC	ROM based spread sheet with floating point maths	£32.50	B
607	DISKDOC	ROM for disk problems in format, search, files etc.	£27.50	B
700	BOOKS	Various titles for the BBC Micro from	£ 6.95	
801	CASSETTES	C12 Computer quality tapes boxed in 10's	£ 4.50	
810	5.25" DISCS	MEMORFX Soft sector 40 track S/S discettes	£19.95	
900	SEIKOSHA	GP700A NEW 7 COLOUR dot matrix printer 50cps	£369.00	
901	EPSON RX-80	Superb printer. 100cps, 3 fnts, graphics, tractor	£269.00	
901a	EPSON RX-80	T/F Same as above, with Tractor and Friction feed	£TBA	
902	EPSON FX-80	Magnificent. 160cps, 6 founts, graphics, F/T Roll	£379.00	
910	DISC DRIVES	Slimline TEAC or MITSUBISHI with power supply, 100k - 800k format disc cable and excellent manual. From	£199.00	
920	VDU STAND	Stainless Steel Support protects your micro	£19.95	
930	COLOUR TV	CABEL 14" Colour Monitor 10Mhz 430 pixels	£189.50	

ADD VAT TO ALL PRICES EXCEPT MANUALS AND BOOKS.
FOR COPIES ON DISCS ADD £1.75 PER DISC. NO PACKING CHARGES.
MOST PROGRAMS AVAILABLE ON MICRONET 800.

If you want further information before parting with your hard earned cash send for our free brochure to:-

Micro-Aid (MU)
25 Fore Street, Praze, Camborne,
Cornwall TR14 0JX.
Tel: 0209-831274

EDUCATIONAL SOFTWARE

For children ages 4-11

EDUCARE'S 50

Fifty high-quality programs for primary education
Strongly recommended by educational authorities

on the
ZX81

on the
BBC

MICRO

(Model A and Model B)

with
SPECTRUM
SUPPLEMENT

WITH COLOUR, SOUND AND
OTHER ENHANCEMENTS

£5.95 Paperback
122 pages

PROGRAMS WRITTEN IN
STRUCTURED FORM

(All programs suit IK ZX81)

£7.95 Paperback
110 pages

NEW

These programs cover a wealth of basic concepts every child will meet in primary education. They are produced by professional educators and have been thoroughly tested in a primary school. Designed to go beyond drill & practice they promote learning through interaction and discovery. Programs range from counting and simple arithmetic to ones dealing with volume, balance and direction, mostly in form of games. Each program is short but powerful and comes with full documentation.

To:

EDUCARE
139a Sloane St.
London
SW1X 9AY

Please send copies Educare's 50 on ZX81/Spectrum.
..... copies Educare's 50 on BBC Micro.

I enclose cheque/postal order for £.....
Name.....
Address.....

Let your child benefit early - Send now

BBC

Make the most of your BBC Micro...

with the latest addition to the Pitman
Programming Pocket Guides series:

Pocket Guide to Programming for the BBC Micro

Neil & Pat Cryer/0 273 01979 1/October

Specifically designed for quick, easy access - this jargon-free guide will help you get the most from your BBC Micro.

ALSO AVAILABLE

Pocket Guide to BASIC

Roger Hunt/0 273 01685 7

Pocket Guide to COBOL

Ray Welland/0 273 01650 4

Pocket Guide to FORTRAN

Philip Ridler/0 273 01683 0

Pocket Guide to PASCAL

David Watt/0 273 01649 0

NEW Pocket Guide to FORTRAN 77

Clive Page/0 273 01973 2

NEW Pocket Guide to the Assembly Language for the 6502

Bob Bright/0 273 01990 2

COMING SOON in January 1984, further guides on
the Apple, the Pet, Statistical Programming and
the Assembly Language for the Z80.


All titles ONLY £2.50 EACH

Order NOW from your bookseller.

Pitman Publishing, 128 Long Acre, London WC2E 9AN

Pitman

GRUNDIG KINGSLEY

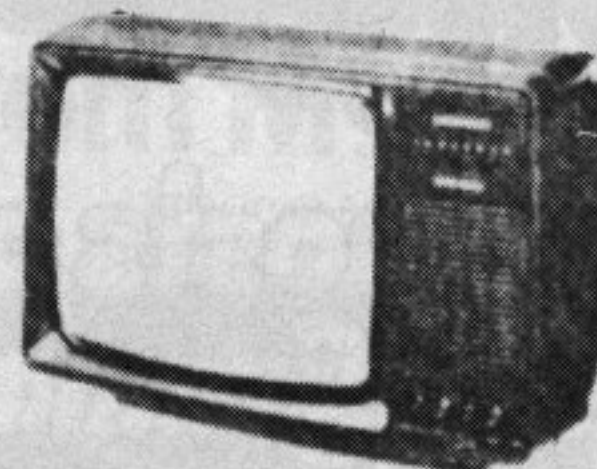

R.G.B. MONITOR/TV (GRUNDIG APPROVED)

As supplied to Education Authorities Specification

R.G.B. inputs (Analogue and Digital Levels) all models
1 Volt P.P. composite video (remote model only)
Teletext decoder available to plug into chassis. (remote model only). Remote control of computer via monitor (remote model only). Sound input gives access to audio amp all models. Instantly switches back to TV.

12" MONOCHROME MONITOR/TV	£95 + VAT
14" COLOUR MONITOR/TV	£227 + VAT
16" COLOUR MONITOR/TV	£255 + VAT
16" COLOUR MONITOR/TV REMOTE	£295 + VAT
20" COLOUR MONITOR/TV REMOTE	£315 + VAT
22" COLOUR MONITOR/TV REMOTE	£340 + VAT
26" COLOUR MONITOR/TV REMOTE	£380 + VAT
PLUG IN TELETEXT MODULE	£75 + VAT
CONNECTING LEAD	£5 + VAT
CARRIAGE AND INSURANCE	£9.50
4 YEAR GUARANTEE	£29.60

KINGSLEY

40-42, Shields Road, Newcastle-upon-Tyne,
NE6 1DR. Tel: (0632) 650653

SPELLWISE

IS YORE SPELING REELY ATROSHUS?

Or is it just a littel bit off kei?

In either case you need SPELLWISE.

SPELLWISE

- is a spelling checker for use with your BBC micro and WORDWISE word processor
- contains an expandable tape-based dictionary of over 3000 words.
- has a comprehensive user manual

SPELLWISE diligently checks every word in your text against the SPELLWISE data tape. When it has finished you will be left with a list of words which are incorrectly spelt or not in the base vocabulary of more than 3000 words.

The program can be interrupted at any stage for inspection of the remaining word list and for the insertion of personal or specialist vocabularies. For this purpose software is included to enable you to create your own data files.


SPELLWISE comprises a set of two tapes plus a complete user manual. It is designed for use with a cassette recorder with motor control.

SPELLWISE costs £12 (including p&p) and can be obtained from:

DATAWARE FREEPOST SWINDON SN3 4BR

TWIN TUBE © COMPUTER WORK STATION FROM

Lowland Designs Ltd.

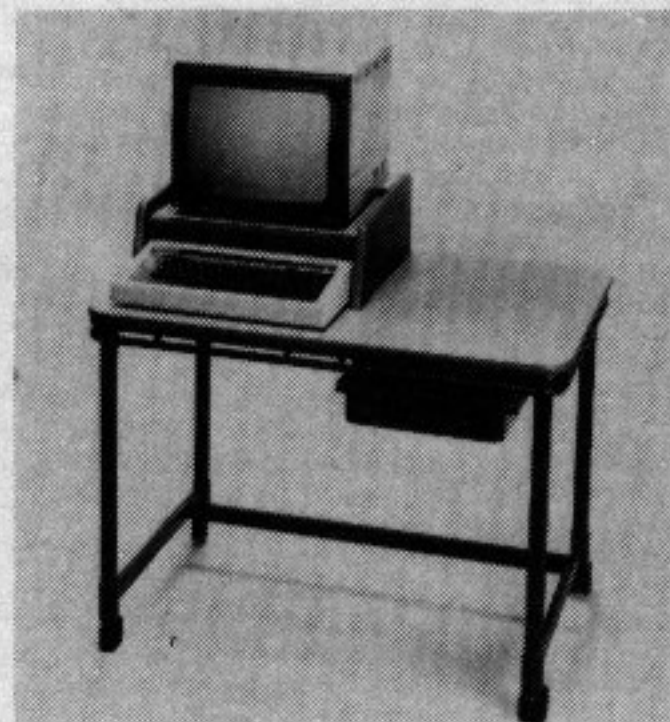

Overall size 900 x 600 x 700mm high.
Adjustable monitor shelf, wire harness tray, 4 way 6amp conblock.


Plastic drawer, castors, matching colours to the BBC Micro.

£72.50 + VAT £10.87 = £83.37

Also available 1200mm long at **£85.60 + VAT.**

For further information write or phone:

LOWLAND DESIGNS LTD.,
Well Road, Lockerbie, Dumfriesshire DG11 2EZ.
Tel: 05762 3399. Telex: 778264



Magic

PRESENTS

The Ghosts of Grunley Grammar

A brand new fantasy quiz game written for the BBC micro. Your task is to make your way through the different classrooms of an old school, now haunted by its old masters. These question-happy ghostly masters can be beaten by a combination of luck, skill and a good memory. And you're against the clock all the way. "Ghosts of Grunley Grammar" is magic to play (and it improves your general knowledge as well).


★ For BBC model B, or model A with 32K. Works on all operating modes 0.1 to 1.2.
★ Electron version now available too!

TAPES: £6.45
(£5.95 plus 50p. p. & p.)
DISCS (40 track): £7.95
(£7.45 plus 50p. p. & p.)
(all prices include V.A.T.)

Send cheque or postal order with your order to

**MAGIC SOFTWARE LTD., Dept MU1,
ASHFIELD ROAD, ELMSWELL,
BURY ST. EDMUNDS, SUFFOLK**
State clearly for which micro when ordering

Trade and Educational Enquiries welcome

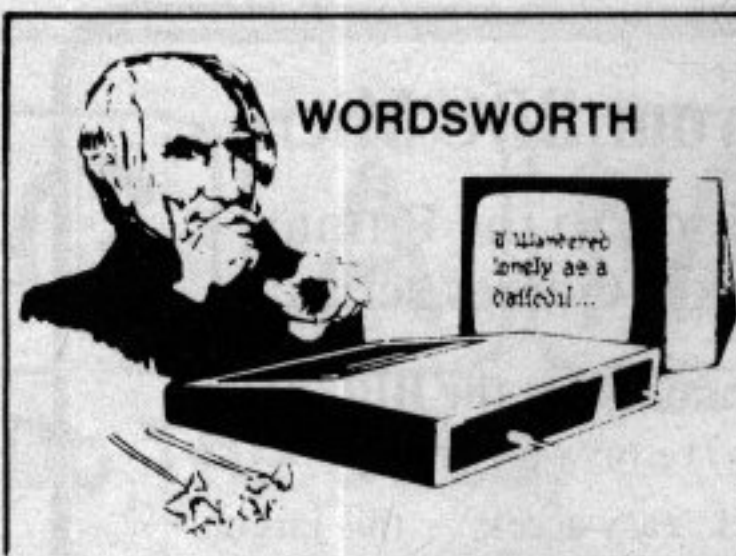

WORDSWORTH

NOW ON
DISC
OR
TAPE

A BBC WORD-PROCESSOR

FOR HOME, SCHOOL, COLLEGE OR BUSINESS
WITH

* BACKGROUND PRINTING * ON-SCREEN
FORMATTING * DECIMAL TAB WITH
AUTOMATIC TOTALLING * DEFINABLE PRINTER
CONTROL CODES *

Print 500 labels, personalise 500 letters, or print 200,000 characters at one command – with up to 9999 copies of everything. Or use it without a printer for your address lists, appointments diary, indexes etc.

IT MUST BE

WORDSWORTH

TAPE £17.25. DISC (40 OR 80 TRACK) £19.50
FROM YOUR DEALER, OR DIRECT FROM

IAN COPESTAKE


Dept. W9, 23 Connaught Crescent, Brookwood, WOKING, Surrey, GU24
0AN. Tel: 048 67 Brookwood 4755

Goods despatched by return. Printing service available.

THE BBC MICROCOMPUTER CAR BADGE



Actual size

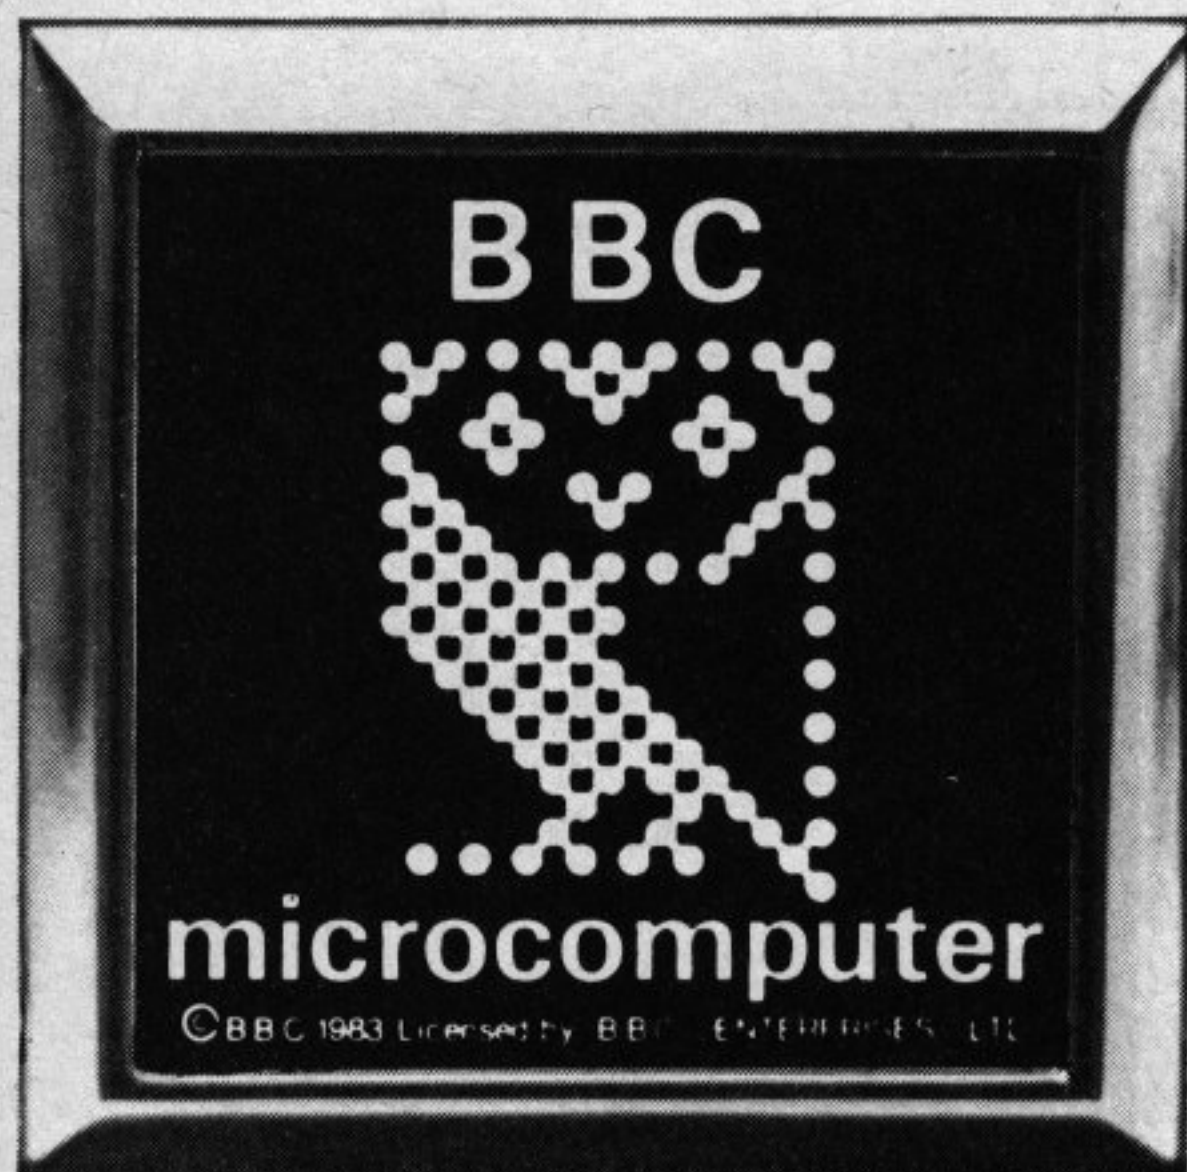

UNITED KINGDOM ONLY

© BBC 1983 LICENSED BY BBC ENTERPRISES LTD.

- ★ COLOUR: CREAM ON DARK BROWN BACKGROUND
- ★ SOLID, DIE CAST, CHROMED, ENAMEL
- ★ COMPLETE WITH BACKPLATE & GRILLE FITTINGS
- ★ BADGE BAR AND BUMPER FITTING HOLES
- ★ MAIL ORDER ONLY £3.80 (INCLUSIVE)

Please send me Badges

I enclose cheque/P.O. payable to HAWTHORN

Name

Address

Send to:

"Hawthorn", 90 Victoria Street, Hyde, Cheshire

It's time to S-T-R-E-T-C-H your Micro! with new books and software from McGraw-Hill

☐ Structured Programming: A First Course for Students and Hobbyists

Peter Gosling

The merits and techniques of structured programming are explained in this book, with examples of the way real-life programs are designed and written.

ISBN 07 084701 0 £5.95

☐ Information Handling for the ZX Spectrum C.A. Street

This book explains how file handling programs are designed, used, developed, and written. Details of the accompanying software are given below.

ISBN 07 084707 X £6.95

☐ Spectrum Information Handling Routines C.A. Street

Contains thirty programs and program segments with machine code routines for sorting. Saves hours of keying!

ISBN 07 084726 6 £6.95 inc VAT

☐ PROFILE 1 C.A. Street

A spreadsheet file handling system for the hobbyist or small business needing a cataloguing, mailing or stock control system. Handles both numeric and alphabetic information, selects, prints, processes, calculates and manipulates words and numbers.

ISBN 07 084706 1 £9.95 inc VAT

☐ The Spectrum Workshop: Word Processing and Beyond Randle Hurley

The Spectrum can be used as a wordprocessor! The programs in this book are as comprehensive as a dedicated commercial package, and are fully described, line by line.

ISBN 07 084704 5 £6.95

☐ Spectrum Interfacing and Projects G.D. Bishop

This book shows how to use the Spectrum to control the outside world and contains many examples, programs and circuits, including a DAC, ADC and latch full construction details. Hardware kits are available for projects, as well as software.

ISBN 07 084702 9 £6.95

☐ Spectrum Interfacing Programs

G.D. Bishop

This support software provides all the necessary programs to drive the projects in the above book.

ISBN 07 084709 6 £6.95 inc VAT

☐ ZX81/TS1000 Programming for Young Programmers

Linda Hurley

A book intended to teach children aged 9 upwards how to program in BASIC, through games and movements, calculated to hold a child's interest.

ISBN 07 084595 6 £4.95

☐ ZX81/TS1000 Programs for Young Programmers

Linda Hurley

Consists of three games programs not included in the above book and provides many extensions and improvements in the book.

ISBN 07 084700 2 £5.95 inc VAT

☐ Learn and Use Assembly Language on the ZX Spectrum

Tony Woods

This book provides a detailed step-by-step introduction to Assembly Language Programming.

ISBN 07 084705 3 £6.95

☐ ZX Spectrum Machine Code Assembler ACS

A full-function machine code assembler which enables the Spectrum to 'speak' Z80 Assembly Language. A must for arcade enthusiasts.

ISBN 07 084717 7 £7.95 inc VAT

☐ Invent and Write Games for the ZX Spectrum

Noel Williams

This book teaches you how to write your own graphic and adventure games programs. See below for accompanying software.

ISBN 07 084719 3 £6.95

☐ Spectrum Adventures

Noel Williams

Three games are included along with additional programs not in the book. The programs are listable and can be examined and modified.

ISBN 07 084720 7 £5.95 inc VAT

☐ Programming the Dragon for Games and Graphics

Geoff Phillips

Programming techniques in BASIC – including a stock control (freezer contents) program, an Adventure game, and Star Battle. See accompanying software.

ISBN 07 084703 7 £5.95

☐ Dragon Games and Graphics

Geoff Phillips

All the major programs in the book – Breakout, Clock, Freezer, Adventure, Cards and Star Battle. All in BASIC, can be listed, to save a lot of keying.

ISBN 07 084715 £7.95 inc VAT



☐ Please send me further details about the above series.

These books will be available at all good booksellers, but in case of difficulty you may order any of the above books, by just ticking the titles you require: Fill in your name and address, and send this advert (or a copy of it) with your cheque or postal order to:
**Marketing Services Department,
McGraw-Hill Book Company (UK) Limited,
FREEPOST, Maidenhead, Berkshire, SL6 2BU.**

Name:

Address:

MU

CHESS LISTING

From Page 63

```

,255,240,0
3160 VDU 23,234,255,255,255,255,255
,240,0,0
3170 VDU 23,235,252,254,254,255,240
,0,0,0
3180 VDU 23,255,255,255,255,255,255
,255,255,255
3190 Fgnd%=Black%
3200 OrigY%=704
3210 FOR OrigX%=0 TO 224 STEP 32
3220 PROCdraw_row(OrigX%,OrigY%)
3230 OrigY%=OrigY%-64
3240 NEXT
3250 ENDPROC
3260 REM
4000 REM ** DRAW ONE ROW OF BOARD
**
4010 DEF PROCdraw_row(OX%,OY%)
4020 REM alternate foreground
4030 Fgnd%=3-Fgnd%
4040 FOR I=1 TO 8
4050 PROCdraw_square(OX%,OY%)
4060 OX%=OX%+128
4070 OY%=OY%+16
4080 NEXT
4090 ENDPROC
4100 REM
5000 REM ** DRAW A SINGLE SQUARE
**
5010 DEF PROCdraw_square(X%,Y%)
5020 REM Invert foreground colour
5030 GCOL 0,Fgnd%
5040 Fgnd%=3-Fgnd%
5050 MOVE X%,Y%
5060 VDU 224,225,226,227,228
5070 VDU 8,8,8,8,8,10
5080 VDU 229,255,255,255,230
5090 VDU 8,8,8,8,8,10
5100 VDU 231,232,233,234,235
5110 ENDPROC
5120 REM
6000 REM *** Draw the major pieces
***
6010 DEF PROCdraw_pieces(Col%,X%
,Y%)
6020 PROCrook
6030 PROCknight
6040 PROCbishop
6050 PROCqueen
6060 PROCking
6070 PROCbishop
6080 PROCknight
6090 PROCrook
6100 ENDPROC
6110 REM
7000 REM *** ROOK ***
7010 DEF PROCrook

```

```

7020 PROCclear
7030 REM shape
7040 VDU 23,228,0,0,0,27,31,31,15
,15
7050 VDU 23,229,0,0,0,216,248,248
,240,240
7060 VDU 23,230,7,7,7,7,7,7,7
7070 VDU 23,231,224,224,224,224,224
,224,224,224
7080 VDU 23,232,15,15,31,63,63,31
,15,0
7090 VDU 23,233,240,240,248,252,252
,248,240,0
7100 REM highlight
7110 VDU 23,236,0,0,0,0,64,64,64
,64
7120 VDU 23,237,0,128,128,128,128
,128,128,128
7130 VDU 23,238,192,64,96,32,48,0
,0,0
7140 REM outline
7150 VDU 23,243,0,0,31,36,32,32,16
,16
7160 VDU 23,244,0,0,248,36,4,4,8
,8
7170 VDU 23,245,8,8,8,8,8,8,8
7180 VDU 23,246,16,16,16,16,16,16
,16,16
7190 VDU 23,247,16,16,32,64,64,32
,16,15
7200 VDU 23,248,8,8,4,2,2,4,8,240
7210 PROCdraw_piece
7220 ENDPROC
7230 REM
8000 REM *** KNIGHT ***
8010 DEF PROCknight
8020 PROCclear
8030 REM shape
8040 VDU 23,226,0,0,0,0,1,3,3,7
8050 VDU 23,227,0,0,0,0,0,0,192,240
8060 VDU 23,228,15,31,31,63,63,63
,63,31
8070 VDU 23,229,252,252,240,248,128
,192,224,240
8080 VDU 23,230,31,31,15,7,7,31,31
,15
8090 VDU 23,231,248,252,252,248,240
,248,248,240
8100 VDU 23,232,15,63,127,127,127
,63,15,0
8110 VDU 23,233,240,252,254,254,254
,252,240,0
8120 REM highlights
8130 VDU 23,235,0,0,0,0,0,0,0,64
8140 VDU 23,236,0,0,0,0,0,0,128,128
8150 VDU 23,237,192,64,96,32,0,0
,0,64
8160 VDU 23,238,96,32,48,16,0,0,0
,0

```

```

8170 REM outline
8180 VDU 23,241,0,0,0,0,1,2,4,4,8
8190 VDU 23,242,0,0,0,0,128,192,48
,12
8200 VDU 23,243,16,32,32,64,64,64
,64,32
8210 VDU 23,244,2,2,12,4,120,32,16
,8
8220 VDU 23,245,32,32,16,8,24,32
,32,16
8230 VDU 23,246,4,2,2,4,8,4,4,8
8240 VDU 23,247,48,64,128,128,128
,64,48,15
8250 VDU 23,248,12,2,1,1,1,2,12,240
8260 PROCdraw_piece
8270 ENDPROC
8280 REM
9000 REM *** BISHOP ***
9010 DEF PROCbishop
9020 PROCclear
9030 REM shape
9040 VDU 23,226,0,0,0,0,0,1,3,3
9050 VDU 23,227,0,0,0,0,0,128,128
,0
9060 VDU 23,228,6,6,15,15,15,3,3
,7
9070 VDU 23,229,96,224,240,240,240
,192,192,224
9080 VDU 23,230,31,3,3,3,3,7,7,7
9090 VDU 23,231,248,192,192,192,192
,224,224,224
9100 VDU 23,232,15,31,63,63,63,31
,15,0
9110 VDU 23,233,240,248,252,252,252
,248,240,0
9120 REM highlight
9130 VDU 23,236,0,64,64,96,0,0,0
,0
9140 VDU 23,237,0,0,128,128,128,128
,128,192
9150 VDU 23,238,64,64,96,32,0,0,0
,0
9160 REM outline
9170 VDU 23,241,0,0,0,0,1,2,4,4
9180 VDU 23,242,0,0,0,0,128,64,64
,224
9190 VDU 23,243,9,9,16,16,16,12,4
,24
9200 VDU 23,244,144,16,8,8,8,48,32
,24
9210 VDU 23,245,32,28,4,4,4,8,8,8
9220 VDU 23,246,4,56,32,32,32,16
,16,16
9230 VDU 23,247,16,32,64,64,64,32
,16,15
9240 VDU 23,248,8,4,2,2,2,4,8,240
9250 PROCdraw_piece
9260 ENDPROC
9270 REM


```



```

10000 REM ** NULL CHARACTERS **
10010 DEF PROCclear
10020 REM produce clear areas for
10030 REM rook, knight and bishop
10040 FOR Char%=224 TO 242
10050 VDU 23,Char%,0,0,0,0,0,0,0,0
10060 NEXT
10070 ENDPROC
10080 REM
11000 REM *** QUEEN ***
11010 DEF PROCqueen
11020 REM DEFINE 4 CHARS FOR HEAD
11030 VDU 23,224,0,0,0,0,1,3,3,7
11040 VDU 23,225,0,0,0,0,128,192,192
,224
11050 VDU 23,226,63,63,31,15,7,7,3
,3
11060 VDU 23,227,252,252,248,240,224
,224,192,192
11070 REM DEFINE 2 CHARS FOR HIGHLIGHTS
11080 VDU 23,234,0,0,0,0,0,128,0,0
11090 VDU 23,235,168,0,64,192,128
,128,0,0
11100 REM DEFINE 4 CHARS FOR OUTLINE
11110 VDU 23,239,0,0,0,1,2,4,4,56
11120 VDU 23,240,0,0,0,128,64,32,32
,28
11130 VDU 23,241,64,64,32,16,8,8,4
,4
11140 VDU 23,242,2,2,4,8,16,16,32
,32
11150 PROCroyal_base
11160 PROCdraw_piece
11170 ENDPROC
11180 REM
12000 REM *** KING ***
12010 DEF PROCking
12020 REM DEFINE 4 CHARS FOR HEAD
12030 VDU 23,224,0,1,3,3,1,1,3,7
12040 VDU 23,225,0,128,192,192,128
,128,192,224
12050 VDU 23,226,31,31,15,15,7,7,3
,3
12060 VDU 23,227,248,248,240,240,224
,224,192,192
12070 REM DEFINE 2 CHARS FOR HIGHLIGHTS
12080 VDU 23,234,0,0,128,128,0,0,0
,0
12090 VDU 23,235,96,0,64,64,192,128
,128,0
12100 REM DEFINE 4 CHARS FOR OUTLINE
12110 VDU 23,239,1,2,4,4,2,2,4,24
12120 VDU 23,240,128,64,32,32,64,64
,32,24
12130 VDU 23,241,32,32,16,16,8,8,4
,4
12140 VDU 23,242,4,4,8,8,16,16,32
,32
12150 PROCroyal_base
12160 PROCdraw_piece
12170 ENDPROC
12180 REM
13000 REM ** BOTTOM OF KING AND QUEEN
*
13010 DEF PROCroyal_base
13020 REM DEFINE 6 CHARS FOR SHAPE
13030 VDU 23,228,7,31,3,3,3,3,3,3
13040 VDU 23,229,224,248,192,192,192
,192,192,192
13050 VDU 23,230,7,7,7,7,15,15,31
,63
13060 VDU 23,231,224,224,224,224,240
,240,248,252
13070 VDU 23,232,63,63,127,127,127
,63,31,0
13080 VDU 23,233,252,252,254,254,254
,252,248,0
13090 REM DEFINE 3 CHARS FOR HIGHLIGHTS
13100 VDU 23,236,0,0,0,0,128,128,128
,128
13110 VDU 23,237,128,192,64,64,64
,64,32,32
13120 VDU 23,238,32,48,48,24,24,0
,0,0
13130 REM DEFINE 6 CHARS FOR OUTLINE
13140 VDU 23,243,24,32,28,4,4,4,4
,4
13150 VDU 23,244,24,4,56,32,32,32
,32,32
13160 VDU 23,245,8,8,8,8,16,16,32
,64
13170 VDU 23,246,16,16,16,16,8,8,4
,2
13180 VDU 23,247,64,64,128,128,128
,64,32,31
13190 VDU 23,248,2,2,1,1,1,2,4,248
13200 ENDPROC
13210 REM
14000 REM *** DRAW A PIECE ***
14010 DEF PROCdraw_piece
14020 REM select colour, move to start
14030 GCOL 0,Col%
14040 MOVE X%,Y%
14050 REM draw shape
14060 VDU 224,225,8,8,10,226,227,8
,8,10,228,229,8,8,10,230,231
,8,8,10,232,233
14070 REM change to white for highlight
14080 GCOL 0,3
14090 MOVE X%,Y%
14100 VDU 9,234,8,10,235,8,10,236
,8,10,237,8,10,238
14110 REM now cyan for outline
14120 GCOL 0,1
14130 MOVE X%,Y%
14140 VDU 239,240,8,8,10,241,242,8
,8,10,243,244,8,8,10,245,246
,8,8,10,247,248
14150 REM adjust origin for next piece
14160 X%=X%+128
14170 Y%=Y%+16
14180 ENDPROC
14190 REM
15000 REM ** DEFINE PAWN-SHAPE **
15010 DEF PROCdef_pawn
15020 REM main shape
15030 VDU 23,224,0,0,0,0,0,1,3,7
15040 VDU 23,225,0,0,0,0,0,128,192
,224
15050 VDU 23,226,7,3,1,7,1,1,3,3
15060 VDU 23,227,224,192,128,224,128
,128,192,192
15070 VDU 23,228,7,7,15,31,31,31,15
,0
15080 VDU 23,229,224,224,240,248,248
,248,240,0
15090 REM highlight
15100 VDU 23,230,0,0,0,0,0,0,0,192
15110 VDU 23,231,128,0,0,0,0,0,0,128
15120 VDU 23,232,128,128,192,64,96
,0,0,0
15130 REM outline
15140 VDU 23,233,0,0,0,0,1,2,4,8
15150 VDU 23,234,0,0,0,0,128,64,32
,16
15160 VDU 23,235,8,4,6,8,6,2,4,4
15170 VDU 23,236,16,32,96,16,96,64
,32,32
15180 VDU 23,237,8,8,16,32,32,32,16
,15
15190 VDU 23,238,16,16,8,4,4,4,8,240
15200 ENDPROC
15210 REM
16000 REM *** DRAW A PAWN ***
16010 DEF PROCdraw_pawn(Col%)
16020 REM select position and colour
16030 MOVE OrigX%,OrigY%
16040 GCOL 0,Col%
16050 REM draw shape
16060 VDU 224,225,8,8,10,226,227,8
,8,10,228,229
16070 REM highlight
16080 GCOL 0,3
16090 VDU 8,11,11,230,8,10,231,8,10
,232
16100 REM outline
16110 MOVE OrigX%,OrigY%
16120 GCOL 0,1
16130 VDU 233,234,8,8,10,235,236,8
,8,10,237,238
16140 REM re-position for next pawn
16150 OrigX%=OrigX%+128
16160 OrigY%=OrigY%+16
16170 pawns_drawn=pawns_drawn+1
16180 ENDPROC
16190 REM
16200 REM **** End of program ****

```

GARLAND COMPUTING

35 DEAN HILL - PLYMOUTH - PL9 9AF. TELEPHONE: 0752 41287

NEW BBC RELEASES

LEARNING MATHS A series of programs for ages 9-12. Each package contains 3 to 4 programs, many with animations and entertaining games to help learn the principles of maths in school or at home. (Each Package £7.00)

Angles . Directed Numbers . Fractions . Co-ordinates and Lines . Symmetry . Motion Geometry . Sets . Elementary Statistics . Ratios

MUSIC TUTOR A unique and absorbing program which helps you to learn or create music. Notes can be entered in various ways, and the pitch and duration displayed on the screen on a treble clef. Other options allow you to play back, alter, make permanent copy and more. Full documentation (£10.95)

EDUCATIONAL GAMES Three programs which will provide fun for all the family and help to improve children's spelling, concentration or ability to estimate angles and distances. (Each £5.95)

Wordsquare . Pick-A-Pair . Sea-Battle

Prices include VAT and P&P. Available by mail order, or from selected computer stores and educational suppliers. Send for full details of our extensive range of educational software.

THE EDUCATIONAL SPECIALISTS

35 DEAN HILL . PLYMOUTH . PL9 9AF

TELEPHONE 0752 41287

THE TYPING MASTERtm

(The typing tutor that puts you in a class of your own)

'The Typing Master' program exists to teach you to type. The easily-met target is 30 words per minute with 95% accuracy over 30 half-hour sessions. The following facilities help you to accomplish this standard.

'Sight & Type' introduces you to the keyboard with the correct finger for each key and takes you to a speed of around 12 words per minute.

'Touch-Typing' takes you to around 24 words per minute at the same time ensuring you learn the peripheral keys to the same standard as those most commonly used.

'Practice Exercises' gives Non-timed accuracy orientated exercises and Timed speed/accuracy exercises. The results are given in words per minute and percent accuracy. The target standard (and far beyond) is achieved through this module.

'Session Monitor' holds your hand all the way through the course from first use of the program to that final, very useful result.

To back up the program you get a 4-page documentation on how to approach the course and a record card to fill-in as you progress through the modules.

'The Typing Master' is not a toy. It is a professionally written program which has as its sole purpose the teaching of typing/keyboard skills in a way that is friendly and fun. It was written by a typing instructor and it has been marketed world-wide on CP/M, MSDOS, PCDOS and other operating system-based machines over the last two years.

Now it is available for the BBC Micro in two versions: 'Basic Version' (Single-user), or; 'Business/Schools Version' (up to 99 users). The latter adds other facilities including a 'Records File' module for the upkeep of each user's record.

BBC Micro Basic Version* (Model A or B) (cassette) £20.00

BBC Micro Business/Schools Version* (disc only) £125.00

Please send payment with order to:

**Anthony Ashpitel
Software Systems,
56 London Road, Harleston,
Norfolk, IP20 9BZ.
Tele hone: (0379) 852807**

* OS 1.0+

WALTERS TAKE ANOTHER BYTE



**WALTERS NEW
STACK-A-DRIVE
GIVES YOU THE
BEST IN DISC DRIVE TECHNOLOGY,
PLUS A UNIQUE IDEA...**

Walters and Teac have combined to give you the best disc drive. You can buy your first now and later just STACK another! And no more cables to purchase either!

FULL 1 YEAR WARRANTY

- | | | |
|------------------------------------|-----------------|----------------|
| 1 100K, 40 track Single Side Pack | £181.00 + VAT = | £208.15 |
| 2 400K, 80 track Double Sided Pack | £299.00 + VAT = | £343.85 |
- Use them in any configuration, but remember your BBC will only support 4 surfaces. For example an 800K dual configuration would cost just
- | | | |
|--|-----------------|----------------|
| | £598.00 + VAT = | £687.70 |
|--|-----------------|----------------|

OPTIONAL EXTRAS

- | | | |
|--|------------------------------|---------------|
| 3 Universal Cable Set (takes both SINGLE and DUAL configuration) | £11.50 + VAT = | £13.22 |
| 4 Disc utilities and manual | £15.00 + VAT = | £17.25 |
| Delivery, including insurance | £4.50 for single + VAT = | £5.17 |
| | £7.50 for two drives + VAT = | £8.62 |

PRE-CHRISTMAS OFFER!

100K	£10.00 OFF =	£11.50 INC. VAT
400K	£19.00 OFF =	£21.85 INC. VAT
800K	£38.00 OFF =	£43.70 INC. VAT

All orders received prior to 1st December, 1983.

Further information about this exciting new idea or details of our complete range of BBC accessories and peripherals may be obtained by phoning us on Stourbridge (03843) 70811.

WALTERS COMPUTER SYSTEMS LTD.
12 HAGLEY ROAD, STOURBRIDGE, WEST MIDLANDS DY8 1PS
TEL: STOURBRIDGE (03843) 70811 (9 LINES)

Get it Right!

DEALER
ENQUIRIES
WELCOME

RUSH ME AN ORDER FORM

Name _____

Address _____

PROCede with caution when spurning GOTO

DEAR Micro User,
PROCletter: PROCname of
writer:END

DEFPROCletter: I am getting a little tired of hearing the cries of the inane structuralist whenever programming comes to the fore.

It seems that there are two sets of programmers at large, those who shudder at the thought of using anything but a PROC statement, and those, possibly reared on "inferior" Basic, who fill their programs with GOTOs and GOSUBs like they were confetti.

An analysis of which technique is the better has led me to the following conclusions.

The all-GOTO approach is obviously incapable of being used in long programs as you need to keep checking where the program is going next... it can end up like Spaghetti Junction in the listing.

Now the all-PROC man is just as foolish, as he will swear that under no circumstances must anything other than a PROC be used. Ten years with a ZX81 is the usual punishment. (Your faint-hearted micro user of the August 1983 edition appears to have encountered such a fellow.)

To use PROCs ALL the time is, I have found, totally beyond

reason.

I have written this letter in such a manner, where there is no need to have used any PROCs... as you can see they clog up the visual running order and one has to check all the DEFPROCs to see what the actual program looks like.

In the end you are going back and forth through the program as if you'd used GOTOs in the first place.

Also having to use three commands instead of one (PROC, DEFPROC and ENDPROC or GOTO) is a waste of vital program space, and in a game like your King Kong (April issue) can even lead to "No room."

Now from personal programming experience just hear this: I am currently writing a piece of software and had written the entire "order" of the program in one line of PROCs, like the top of this letter, and was then defining each PROC in turn.

However, when I came to change mode in a PROC I got "Bad mode". So I then put the

mode changes in between the PROC statements.

OK so far. But then I had to use the VDU5 command, and overlap several shapes in different colours. Because it was used inside a PROC definition it now refused to either change mode OR go into VDU5.

If I were to put the VDU5 outside the PROC, I'd have had to split one PROC into two. The situation was obviously hopeless. PROCs had let me down.

Is this usual for them to "refuse" certain commands? My remedy was to scrub the "extra" line I'd used at the start for all the PROCs, which was gradually getting longer and longer, and all the wasteful DEFPROC and ENDPROCs!

Now I could change mode whenever I felt like it, and use VDU5. However, not wishing to be an extremist, I included a few PROCs that were necessary, as they did repetitive actions.

I never use a PROC for the

sake of it, like some seem to do.

This time I only use them for time loops, etc (for example PROCt(500)). And as for GOTOs, they are excellent at handling inputs - if the input doesn't equal 'Yes' or 'No', GOTO the line where it asks the input question again, for instance.

I've never had any problems with them at that level.

The point is not to swear by any method, but to use either command in its proper place. Both are necessary. That is why both are in the Basic.

Why do you think GOTOs and GOSUBs are in, otherwise, Mr. Structuralist? ENDPROC DEFPROCname_of_writer - Christopher Hester, West Yorks.

● The reason mode change won't work inside the PROC definition is that it would destroy the basic stack which is situated just below HIMEM.

As to your query about VDU5, the answer is that we don't know why it won't work for you. It does for us!

The speedy one

I HAVE recently become interested in machine code for the BBC Micro.

I have now managed to attain a decent standard in programming machine code and can use Mode 7 graphics, but have found it very difficult to use machine code graphics in the hi-res modes without the use of the OS, which is too slow.

Could you do a series of articles on machine code graphics in hi-res modes without using the OS and also incorporate sound without the OS?

Finally, I would like to add

Take the blue viewpoint

WHEN using Mode 0 I suggest readers change the colour of the background to white and the foreground to blue by using VDU19 to redefine the white and black, as it is much easier to read and better for the eyes than the normal Mode 0.

It's great to be able to use the sound facility but often in arcade type games the volume is much too high even with a large book over the speaker - and it's a shame to switch it off.

Why can't the games writers allow you to change the volume or at least turn it down?

Many schools, including mine, have both a BBC and a 380Z Research machine. Is there any way in which you can use the 380Z disc drives with the BBC without it costing too much?

Can you recommend an efficient compiler?

And, finally, is a Cobol version for the BBC likely to appear in the near future? - Simon Taurins, Llanelen, Gwent.

● If you open up your BBC Micro you will find in the bottom left hand corner a

printed circuit board on which is a small blue plastic block. If you examine this you will find there is a small screwdriver slot - this is a volume control and may be used to turn the volume down.

As to your second question, we know of no one using the BBC disc drives with the 380Z research machine without it costing too much.

There is as yet no full compiler for the BBC Micro, but Acornsoft are working on Cobol for the Beeb. No release date has been announced.

From Page 113

Cassette specifications

ACORN Computers have asked us to pass onto our readers their following reply to a letter "indirected" through Micromail:

THE specifications of the cassette interface of the BBC computer, and for reference our data recorder, are as follows:

BBC Computer

Output impedance $< 1k$ ohms

Input impedance $> 100k$ ohms

Output level nominal 200mV P-P

Dynamic input range nominal 50mV – 5V P-P

BBC Data Recorder

Output impedance $< 1k$ ohms

Input impedance $= 40k$ ohms

Output level nominal 275mV RMS

Input signal range 6mV – 200mV RMS

We were well aware during our work on the BBC computer design that people would wish to use many

different types of cassette recorder with their computers and that they would need some means to test and set the correct level.

After much thought it was decided not to provide the signal level specification, as it was felt that this would cause some confusion with a large number of our customers (with particular problems caused by figures given for various recorders in dB, RMS or peak-to-peak values).

Instead it was decided to provide the section on the beginning of the Welcome cassette in the hope that people would be able to adjust the volume controls of their recorders to set the correct level.

This was based on the observation that the cheapest recorders always seem to work once the correct signal levels have been set. – Mike Bicknell, Customer Service Manager, Acorn Computers.

plugs, and can now load and save perfectly.

I use TDK ferric oxide tapes – the cheapest – and have never failed to load or save programs.

Not only that, but the radio/cassette can be at any volume, either minimum or maximum.

The tone control also makes no difference to loading or saving.

I have also found that I cannot load or save programs with the more expensive chromium dioxide tapes. – Ewan MacLeod, Stewarton, Ayrshire.

Overpriced at £400?

I AM going to buy a micro in the near future. At the moment I am looking at the BBC Model B.

Apart from its excellent gra-

phics, I want a machine that eventually I could use as a word processor – not to mention educational software for the kids.

However the Beeb looks a trifle overpriced at £400. Now that the Commodore 64 is almost half the price, I can't believe that the Beeb is twice as good.

The Memotech MTX512 looks good too from what one can see from the pre-release reviews.

How will it shape up next to the BBC? How much longer can Acorn (or is it the BBC?) keep the price so high?

Do you expect the price to drop – say before Christmas?

On a different tack, are "sprites" and "user-defined" graphics the same animal? – Martin Crawley, Isleworth, Middlesex.

● The BBC Micro is worth every penny you pay for it. Far

from being overpriced it is underpriced and we can see little chance of its price coming down in the future, unless some of the High Street stores start discounting.

The low profit margins of the BBC Micro make that unlikely.

Sprites bear some resemblance to user defined characters but are far cleverer beasts.

Rampant robot

MAY I be the millionth person to congratulate you on the high quality of your excellent magazine.

Inspired by your review of "Countdown to Doom" the adventure game by Acornsoft, I bought it.

Now I know that one gets a crib sheet with the game but I'm absolutely stuck.

Even with their cryptic clues, I have been unable to de-activate the robot.

When I bought my Beeb I was determined not to become addicted to playing games, but would get down to the finer parts of programming.

Anyway, you have been indirectly responsible for my predicament, so I wonder if you will publish this plea for help. – M.B. Hollands, Warminster, Wiltshire.

● If any reader who knows how to de-activate the robot would write to us we'll pass the replies to Mr Hollands.

Way with strings

CAN you help me with this problem please? I always compile an index page for my discs which is !BOOTed.

The page shows names in full, but when a program is

that I feel your article on King Kong was a little trivial. When writing an arcade style game in Basic it is usually far faster if most of the program is written in a less structured manner.

Contrary to popular belief, the GOSUB command on the Beeb is faster than the PROC command.

Also why waste memory making a PROC for slowing down when a FOR ... NEXT loop can be used?

The PROC uses a lot of memory to be defined and then the actual call is large too. – Barry Wakelin, Greatham, Hants.

● A machine code course which will cover your requirements is currently being written for us.

It will cover most of the points you require, as will Acornsoft's forthcoming book "Creative Assembler".

The author of King Kong thoroughly agrees with you. After all the object of the exercise was to produce an enjoyable, exciting game, which he achieved.

Having said that, some still prefer us to publish structured programs – they're easier to debug!

In praise of tape

I WRITE to defend the BBC Micro's much-criticised cassette system, and hope my experiences will be of help to readers.

I have the Model A with the 0.10 OS. This, together with the fact that I use a combined radio-cassette with twin speakers, is generally considered to be a bad choice.

However, I previously used a 7-pin Din with two 3.5mm jack plugs, and found I could only load programs – sometimes unsuccessfully.

I later bought two 5-pin Din



COMMUNITY

Community falls into the category of strategic games. You take the role of Lord of the Manor and must deal with a wide range of hardships from starvation to murder at the hands of a ruthless bank manager. The program is based around the classic "Kingdom" game, including four types of crop, four types of animal, six possible weather conditions, a market and numerous natural (and unnatural) disasters.

Model B Price £6.90

ULTIMA-FILE

This program is an invaluable aid to your collection whether your interests lie at home or in the office. ULTIMA-FILE will handle your current filing system. Useful for keeping records of anything from telephone numbers to stock lists. Includes an alphabetical sort.

A or B Models Price £7.50

BRIDGE TO THE EAST

A new experience in graphical adventure games. It combines the excitement of an arcade game with the subtlety of an intriguing adventure. You take the part of a wizard who must protect a band of would-be heroes, as they journey to save the land by restoring the Crystals of Power. All the action takes place in real time in exquisite scenery interspersed with cunning riddles and brain-teasing problems.

Model B Price £8.05



MINER

In 'Miner' you are trapped on an alien planet called 'Rhondahl'. Your ship has been rendered inoperative and you require a 'Hornfelse' crystal to power the hyper drive. Without the crystal you cannot attain enough power to overcome the planet's gravitational field.

The planet is formed of 'Kyper-Marl' with mountains of 'Granite'. Your tools can cope with the 'Kyper-Marl', but not the 'Granite' and you must venture into the cave system in search of the crystal. Beware, however, the indigenous cavemen who dwell in these subterranean vaults and the explosives left by previous unsuccessful and very dead end expeditions.

Model B Price £6.90

LIFE

Conway's classic game reproduced faithfully on the BBC MICRO.


Model A Price £4.75

Write to: **IXION SOFTWARE**

10, The Crescent, Lymsham, Weston-Super-Mare, Somerset BS24 0BH.

Cheques and Postal Orders payable to 'IXION SOFTWARE'. Allow 21 days for delivery.

(All prices include VAT & Postage and Packing)

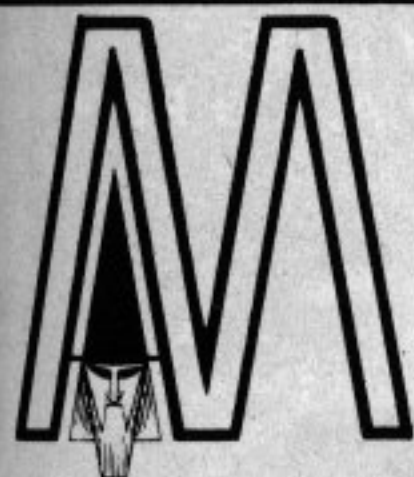

DO YOU WANT A WORD PROCESSOR FOR YOUR BBC OR A WORD PROCESSOR FOR YOUR BBC ?

Yes there is a difference between word processors and we can offer the best because it's the **FIRST PROFESSIONAL DISC BASED WORD PROCESSOR FOR THE BBC COMPUTER.**

The MERLIN SCRIBE uses the disc on your computer the same way that professional systems costing many hundreds of pounds do.

Until now any document you wished to create has been limited to the few pages which could be squeezed into your computer memory. This means the computer is really using the disc as if it were a cassette!

The SCRIBE can create documents far greater in size than the computer memory, and really uses the disc as it was intended to be used. SCRIBE automatically loads and offloads pages between disc and memory without you even knowing it's happening!

Amongst the many super features available are:

- * Optional 40 & 80 column screen format selection.
- * On screen formatting - you see it as it's printed INCLUDING UNDERLINING.
- * Right justify, word wrap, insert, delete, move copy & centre.
- * Document merge (will merge two documents into one from disc).
- * Addresses all four drive units allowed by your BBC disc system.

Plus many more professional features.

SCRIBE comes in ROM with five minute fitting instructions, printer utilities on disc and a comprehensive manual.


PRICE £59.95

Also MERLIN SCRIBE in ROM for cassette machines £29.95, and on tape £19.95. All prices include VAT. Post and Packaging 60p.



MERLIN COMPUTER PRODUCTS (BUCON LIMITED)
18 MANSEL STREET, SWANSEA, SA1 5SG. TEL (0792) 467980



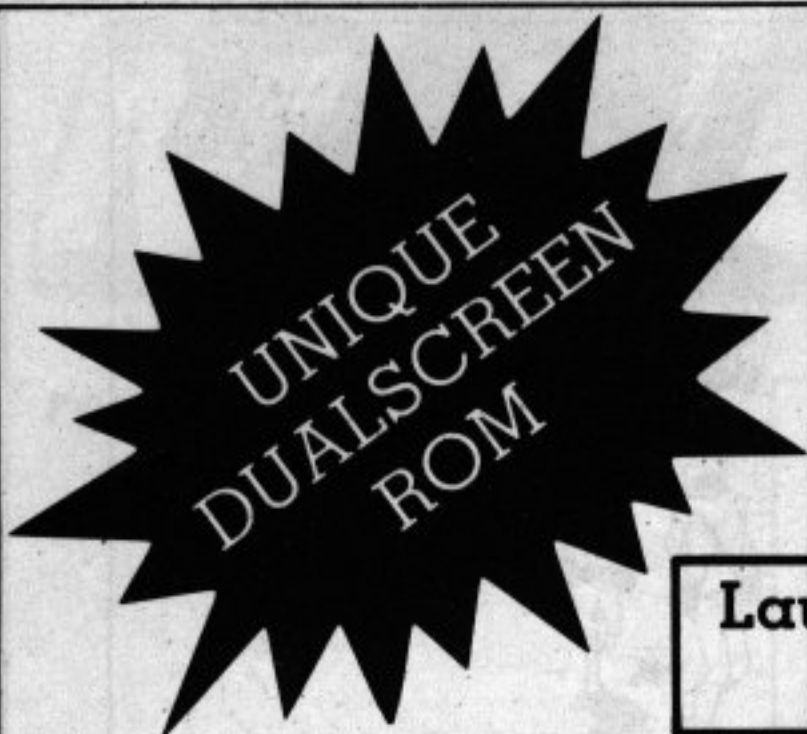

AID at last!


Assembler Interactive Debug for the
BBC Micro with DUALSCREEN

Launched on cassette and now available
on ROM with extended features

- Discover the exciting world of fast machine code
- Powerful – but easy to use
- Essential for beginners and experts alike
- Used extensively by schools, colleges, universities and government establishments

★ FEATURES

- A packed 8k ROM with over 40 commands to help you crack machine code on the BBC Micro
- Superb mode 7 colour screen with disassembled program listing, status display and AID command and message lines
- Comprehensive specification includes breakpoints, single step, modify memory and registers, move, copy, find, disassemble/hexdump, block fill, relocate
- Excellent user guide giving detailed description on how to use the AID facilities

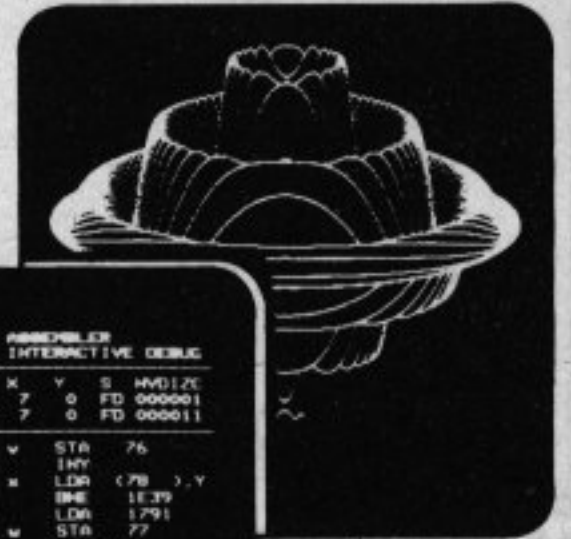

★ DUALSCREEN

Unique to AID giving you unmatched power for developing or watching machine code graphics in action. AID supports two concurrent screens – its own and your program's, so use of AID does not mean loss of your graphics screen. On entry AID saves the screen ready for when you return to your program. This superb facility only requires 1.5k of RAM and makes AID the most powerful program available for developing or learning machine code graphics.

The most advanced machine code AID for the BBC Micro

LINCOLN
Microsystems

Dept DP1, 22 Lagan Walk
Peel Hall
Manchester M22 5WG



ROM
plus manual
(OS 1.2 required)

£28

p&p add
UK £1.50
Europe £3.00
Outside Europe
£4.50

NOW FLY THE CASSETTE!!

ONLY £7.95
Including V.A.T. & P&P

*CURRENTLY ON
PRESTEL VIA
MICRONET 800

Dealers Contact
(0903) 206076

747

DOCTOR SOFT

BBC
ALL OPERATING
SYSTEMS

32K

747

FLIGHT
SIMULATOR
& BRIEFING

A full blown, pilot written simulation (writer of the famous Atom 747) real time instrument and visual display, 3D runway view (Heathrow or Gatwick), large dials, moving pointers plus digital readout. Demonstration approach and landing. Full, separate briefing program. Area chart, notes and flight plan. Fantastic!

SPEECH ROM? TABLES TEACHER! The Doc speaks! One multiplication in several different interesting and colourful ways. (Runs OK without S.R. but DOC is silent). (Add £4.00 for disk version).

KREMLIN multi level maze escape with Gremlins/bomb/3D graphics and sound/map/compass/quiet explore option!

HARMONY: infinite, saveable, 3D patterns of colour and sound, menu driven.

WORD PERFECT friendly and versatile, full facility 40/80 column word processor (add £4 for disk version)

ROYALTIES DOC PAYS THE BEST FOR THE BEST

DOCTOR SOFT

ADVANCED SOFTWARE



A new concept, a new classic



*CURRENTLY ON
PRESTEL VIA
MICRONET 800

Wolfpack III

BBC 32K, all operating systems
Combat briefing and program

"Sometimes your first warning is a lancing disruptor beam striking from beyond – sometimes they materialise close at hand. You are either quick or dead!" "A think, zap and think again game!"

True in-space cumulative motion, amazing full colour Starfield graphics & sound. Multiple ship control, each ship has its own mission and destiny, 4 types of enemy, meteor strikes. Good strategy rewarded by energy & promotion. Poor combat rewarded by death! (but rescue/refuel possible). Rotating base station.

NO extras all prices fully inclusive

- Special offer £1 off for 2 items, £2 off for 3 items, etc

Name

Address

Orders to: Doctor Soft, 258 Coneygree
Rd., Peterborough PE2 8LR

- ... copies of 747 @ £7.95
- ... copies of Wolfpack £7.95
- ... copies of Tables Teacher £7.95
- ... copies of Kremlin £6.95
- ... copies of Harmony £6.95
- ... copies of Word Perfect £9.95

TOTAL £

From Page 114

selected the program CHAINS the first seven letters.

Recently I bought an RX-80 Epson printer.

It would be much more convenient to LOAD from the disc as I often have to edit the programs before running, for example, I keep letterheads on the disc.

But I cannot replace CHAIN by LOAD – it prints just syntax error. There must be a way of overcoming this. – R.Y. McNulty, Northampton.

● Unfortunately you can CHAIN a string but you cannot LOAD it, so CHAIN A\$ will work but LOAD A\$ will not.

Believe it or not, our editor came to the rescue. Set up a function key with the OSCLI routine that contains "LOAD" + A\$, then "press" that key with a *FX138. The User Guide contains the details, OS 1.0 and above.

We're going to be giving full details in a future article describing an interesting disc utility.

Building the Buggy

THE review by Mike Cook in The Micro User in August this year compares the Edinburgh Turtle to the Economatics/BBC Buggy, which is constructed using elements of Fischertechnik of which we are the manufacturer.

While the article may make a number of points concerning the technical applications of a Buggy about which we are not able to comment, we would like to make a point regarding a statement made on the first page of the article.

Mr Cook says: "In contrast to the precision engineered Turtle, the Buggy gives the impression of being made from a child's construction set – which it was!"

Fischertechnik may well be designed for use by children, but to dismiss it as a simple child's

toy is unfair, to say the least.

Fischertechnik parts are manufactured to the highest standard and most precise tolerances.

The kits are used widely in schools and universities as a teaching aid for CDT studies and even in industry where they are used to test design principles and layouts at a very high and precise level.

Fischertechnik was chosen for use in the BBC Buggy after careful consideration by the BBC, the MEP and Economatics, the ultimate manufacturers of the whole Buggy, only after we were able to prove to everyone's satisfaction that Fischertechnik can maintain the precision required for an instrument such as the Buggy.

The Edinburgh Turtle is designed and built in an entirely different manner to the BBC Buggy.

One of the important points about this is that it is to be constructed by the purchaser himself, and this in itself is a valuable part of the exercise.

Some of the problems experienced by Mr Cook are quite possibly the result of construction from the kit, and resolving these would be an important part of the exercise for a purchaser of the BBC Buggy.

To sum up the BBC Buggy, being constructed from Fischertechnik, is not only engineered with great precision, but also allows the purchaser to use his own experience in further developing his capabilities. – Martin Thomas, marketing manager, Artur Fischer (UK) Ltd.

● A review is a record of the impression gained of a new product, not a free advertisement. We have a duty to our readers to explain how the product comes across in an unbiased yet entertaining manner.

I stand by the decision to review the two buggies in one article as I do not think that there will be many schools who will be able to purchase both and so, by definition, they will be rivals.

The number of points that "need clearing up" seem mostly to agree with what I said, except that they are couched in glowing salesman-like terms, but let me clarify where we differ.

The software supplied with the BBC buggy was, in my opinion, quite poor. This was the result of over-production. The programs promised more than they delivered.

They were confusing to operate and when I finally worked it all out I was left with the feeling, "Oh is that all it does".

This was also the opinion of about 10 teachers to whom I showed it.

I know it would have been easy to drive the buggy with a background task, so why was one of the programs not constructed to demonstrate this? You seem to think the teachers incapable of understanding it would be capable of writing it!

The shortfall in the rotation was not due to faulty construction, as it was cumulative. Therefore after several rotations it was 180 degrees out.

When the test program unwound it however, the over rotation in the other direction cancelled this out and the Buggy ended up pointing in roughly the correct direction.

I did try to remove the bumper but it would not be removed, it just went limp and floppy.

The buggy had been assembled by a post-graduate student teacher, so I suppose that children will do better.

None of the teachers who saw the buggy in action were impressed with it. I think the trouble is that, like the software, it promises more than it delivers.

Mike Cook

No link

I HAVE a BBC Micro at home and one at my business.

I would be grateful if you would advise me of the most economical method for transferring the contents of discs between one and the other by telephone.

The user manual hints that both Prestel and Econet add-on units will do this, but the details are not specific. – D.A.G. King, Wrotham Heath, Kent.

● Prestel or Econet both involve a type of downloading, but not of the sort you require.

As yet there is no method of transferring programs directly from one micro to the other via the telephone.

Specialist groups

THE British Primary Health Care Group is anxious to help co-ordinate the efforts of all those who are finding uses for BBC computers in general practice and primary care.

We hope to try and prevent the inevitable duplication that will occur, by setting up a subgroup to run a medical software library, assist novices, and run meetings around the country.

The library programs will be available free to members. Typically they will be small practice accounting packages, morbidity analysers, rotas, and small databases for vaccination recall. Membership will be £6

a year including bi-monthly newsletter.

Anyone interested in joining, or more importantly, participating in this group, please contact: Dr R.H. Board, BBC Group Organiser, Carisbrooke House, Stockleigh Road, St. Leonards on Sea, E. Sussex TN38 0JP. – Dr N. Robinson, PHCG secretary.

● Nice to hear of the formation of a specialist user group. If anyone has formed any other special groups (or wants to) please let us have details.

MICROMAIL

DFS changes

I HAVE read with interest your review of disc filing systems in the September issue of *The Micro User*. I would like to thank Jim Notman and Chris Martin for the fair way in which they both treated the subject.

I would, however, like to point out that the Amcom DFS that was reviewed was one of a very early batch and certain important aspects have been considerably improved since the review was carried out.

The most significant change to the Amcom DFS has been the removal of the heavy error checking while handling random access files to bring it into line with other disc filing systems presently available.

This has allowed for considerable increases in the speed

of the system.

When the DFS was originally conceived we considered including an **ACCESS* command, but concluded that it could be dangerous to allow the global locking and unlocking of files indiscriminately, therefore the **ACCESS* command was omitted.

However due to popular demand we have now included this command in the Amcom DFS.

The random access file handling routines have also been tidied up somewhat, for instance the *OSGBPB* calls now function in a standard manner (including *OSGBPB 8* which Jim Notman so observantly noticed was missing).

Locked files can now be read into memory, so Wordwise will now function happily with this DFS (the reduction in error checking has also greatly speeded up saving and loading

of Wordwise files).

This DFS can also handle up to five open files in the same manner as the Acorn DFS.

COPY* is, and always has been, able to copy files from more than one directory at once. For instance all files beginning with a "W" may be copied regardless of their directory by typing **COPY 0 1 #W.

The Amcom DFS can **RUN* a program from a different directory without the full file specification although in some circumstances the file name may need to be in inverted commas to avoid ambiguity with other commands.

The reason **CAT* does not give an alphabetical listing of the files on the disc is because with page set at &1500 as opposed to Acorn's &1900 there is no longer space to alphabeticalise the file names, especially in extended mode

where there are up to 63 file names.

We believe that an extra 1k of user memory is more important than having the catalog in alphabetical order.

Finally if anyone who purchased an early version of this DFS would like to have it exchanged for the current version, please contact our customer service department for a replacement. — Kevin Gibson, Technical Director, Pace Software Supplies.

Anon . . .

JUST a minor moan. I wrote your last two games of the month — *Fruities* and *Robin and Marian* but you didn't print my name on either of them. Yours sincerely —

● Sorry about that, but our typesetting machine just won't print
Still thanks for the games!

And finally, with tongue firmly in cheek . . .

Dear Trev

I write to you in pain, a convalescent newly-emerged from a hospital bed like a butterfly from a chrysalis (or a blue-bottle from rotting meat, as Andrea might say).

It was nothing serious, just one of those silly accidents. I was up in the spare room "playing" with my Beeb (as A would put it), running a rather nasty games program called *Vet* in which you have to catch and neuter cats before they breed and overwhelm you.

I was trying to take the cassette out of its player and I knocked the case over the other side of the table.

Without thinking I went to get it and tripped over the Beeb's electric flex which A had tidied up earlier without telling me.

The result was two broken fingers on my left hand, a couple of cracked ribs and a nasty bang on the head. A found me unconscious on the floor.

She says that she left me for a while because she thought I was worshipping the Beeb, but I don't believe her.

Anyway, the result was a couple of days in the local general hospital for observation and it was not without incident. Despite being groggy I was sitting up in bed trying to read *The Micro User*, fascinated by the way the listings were scrolling, and a nurse saw what I was reading.

"Oh, are you one of those microchip people who're going to put us all out of work?" she asked.

Before I could reply she stuck a thermometer in my mouth, took my pulse and walked away saying, with a most un-Nightingale smirk, "Well, get your computer to take you to the loo, then."

Actually she was quite nice, which is more than I can say for

Andrea. Apparently she'd warned the doctors that I might suffer from withdrawal symptoms, as I was addicted to the Beeb.

This probably explains some of the funny looks I kept getting from the nurses. And it didn't help when A visited.

"Here's a couple of things for you, may help you a bit, avoid you going 'cold turkey'," and she handed over a pocket calculator and a magazine on computers which had nothing to do with Beebs.

"They'll keep you from missing your thing," she explained and with these alarming words (remember I was still groggy) she announced that she was off to an emergency bell ringing practice.

"Ask not for whom the bell tolls", she said cheerily, by way of parting, "it might be tolling for you, yet".

After she'd gone I had a nightmare about A lending Beeb to my horrible nephew Nigel, he of the inquisitive mind and ever-ready screwdriver.

Remember what he did to his grandad's wheelchair that time? He was never the same man.

It was a relief when I woke up in my hospital bed, though I was in a cold sweat, which one of the nurses misinterpreted, so I was kept in for an extra day.

Anyway, I'm out now and I've got some time off work, which I intend to devote to my Beeb, though it's hard typing with one hand.

See you soon

Cheers, Bob.


P.S. Don't tell Andrea, but the nurses heard her talking about bell-ringing and promptly christened her *Death Nell*. I must send them a box of chocolates.

Learning a Language ?

kosmos
Software

A French Language Learning Aid.

BBC
Micro
Model B

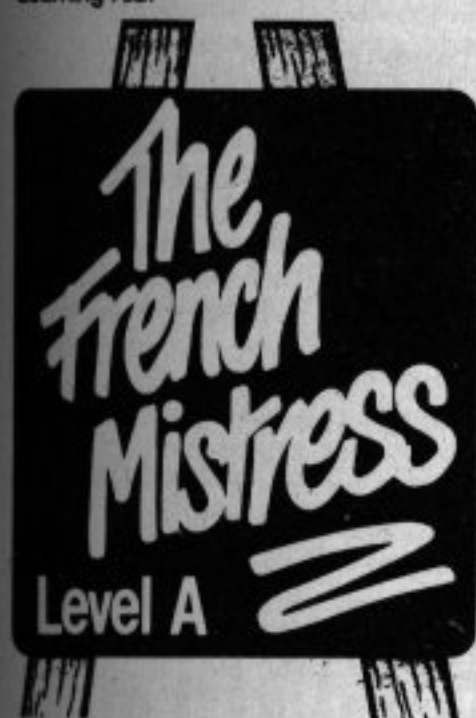

kosmos
Software

A German Language Learning Aid.

BBC
Micro
Model B



- ★ For Pupils, Teachers, Travellers or anyone interested in languages.
- ★ Ready made lessons provide an enormous vocabulary of words, phrases and verbs arranged in subject groups.
- ★ Lessons can be run in three ways; learning, self-test or speed and accuracy test. Clear, large-format displays including all special characters; each gender has its own colour.
- ★ Full tape editing facilities allow an infinite number of new or updated lessons to be created and stored for later use.
- ★ Runs on all operating systems including systems fitted with disc.

Choice of Level A or B cassettes with totally different vocabularies. Both include extensive word lists; verbs and phrases are introduced in Level B. Available from dealers, large stores or mail order. Prices include p&p.

French Level A or B £9.95 each
German Level A or B £9.95 each
Available soon: Spanish and 48K Spectrum versions.

kosmos

SOFTWARE

1, Pilgrims Close, Harlington
Dunstable, Beds. LU5 6LX
Tel: 05255 3942

PRINTERLAND

BBC Printer Specialists, Epson Dealer
Since 1980

EPSON RX80 Tractor	£246
EPSON RX80 F/T Friction + Trac.	£279
EPSON FX80 Friction + Trac.	£345
SEIKOSHA Colour Printer	£Lowest/CALL
SMITH-CORONA Daisywheel	£345
BBC/PRINTER CABLE	£8.99

Next Day Securicorp Delivery £7.00

Educational and Overseas Orders Welcome

12 Months Warranty on Epsoms
FREE High Res. Screen Dump for Epson/Seikosha
Callers Welcome by Appointment

**29 Moorcroft Park
New Mill**


Huddersfield HD7 7NH

Tel: (0484) 683566/687928 (24 Hours)

Barclaycard/Access Facilities Available

New! . . . available now from

A comprehensive debugging monitor and dis-assembler on ROM for the BBC microcomputer.

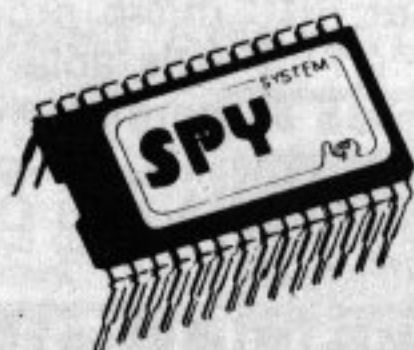

SPY is instantly accessible to the programmer for inspecting, modifying, debugging and dis-assembling machine code programs. SPY has a very comprehensive set of commands supported by an excellent Users Guide.

SPY features


- great, easy-to-read COLOUR display
- single key commands
- hexadecimal, ASCII and DIS-ASSEMBLED display modes
- SINGLE STEP and TRACE in hexadecimal and DIS-ASSEMBLED instruction modes
- access front panel with BREAKPOINTS, OSBYTE (new *FX call added) or CTRL-F. All entry points can be enabled or disabled.
- continue program execution with CONTINUE and JUMP commands
- NUMEROUS commands for locating memory including FIND byte pattern and FIND "string"
- alter memory and registers with ease
- includes FILL, MOVE, VERIFY and TYPE memory commands
- instant SPY GUIDE help page
- can inspect and repair BASIC programs with or without ASSEMBLY LANGUAGE routines.
- *LST added to operating system commands to DIS-ASSEMBLE memory to screen or printer
- ROM-based program can NOT be corrupted. Shares workspace amicably with BASIC. Uses NO USER RAM.

This is the **ULTIMATE** debugging aid for the serious programmer.

£24.15 incl. vat

Please enclose cash with order or an official order form

SYSTEM SOFTWARE

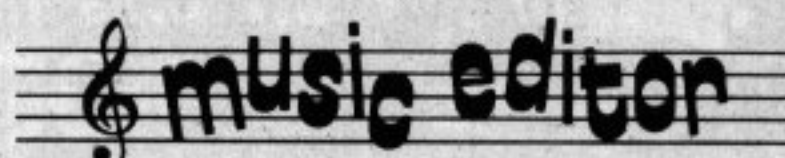

Write your own compositions for the BBC microcomputer or enter tunes directly from sheet music with ease.

- full GRAPHIC display showing treble and bass staves
- VERSATILE SCREEN EDITOR with single key input
- up to 1200 note compositions on tape (600 on disc)
- SAVE your music/sound effects on disc or tape
- write in ANY KEY; sharps and flats are put in automatically
- up to 3 VOICES
- redefine up to 16 ENVELOPES
- graphically FOLLOW the amplitude/envelope, duration and pitch of each note
- HEAR the notes as you enter them

32K required disc or tape **£9.00 incl. VAT**

Super new GRAPHICAL ENVELOPE GENERATOR

- interfaces directly with MUSIC EDITOR
- 16 special envelopes already defined
- SAVE envelopes for use in ANY program
- easy to use SCREEN EDITOR
- amplitude and frequency parameters are displayed GRAPHICALLY

32K required disc or tape **£7.00 incl. VAT**



Create your own graphics characters on the screen with this versatile CHARACTER GENERATOR.

- indispensable for SCREEN ANIMATION
- complete with illustrative ANIMATION programs and 4 sample CHARACTER SETS
- SAVE character sets on disc or tape for immediate inclusion in your programs
- Lists VDU 23 commands for typing directly into programs
- Users Guide gives hints on animation and method of using "imploded" and "exploded" character sets
- compatible with all Operating Systems

32K memory needed tape or disc **£9.00 incl. VAT**

SYSTEM

Dept B, 12 Collegiate Crescent, Sheffield S10 2BA

AUSTRALIAN B.B.C.

MCS Microcomputer Systems invite U.K. software houses to contact us for distribution and sales of their products throughout Australia.

**Write or phone
Australia 02-9231373**

**PO Box 131,
Camberay NSW 2062, Australia.**

INSTRUMENTATION AND CONTROL FOR THE BBC

1. **ANALOGUE DISTRIBUTION UNIT.** Will accept up to four analogue sensors and three switching devices, or two switching and one low speed Digital to Analogue converter, or light pen.
2. **DIGITAL DISTRIBUTION UNIT.** Will accept up to eight switching devices or sensors that give digital output, with or without handshake.
3. **SENSORS** available for temperature, light, pH, and liquid flow. Others under development.
4. **CONTROL DEVICES** available are, relay contacts and opto-isolated mains socket. Other control devices under development and specials to Order.
5. **SOFTWARE** to exercise individual sensors or control devices with enough remarks to enable you to modify it to suit your requirements.

For further details write or phone,

DEDICATED MICROPROCESSORS LTD.

Regeneration House, School Road, North Acton, London NW 10 6TD.
Tel. 01-965-2841

TOP QUALITY PRINTERS! ROCK BOTTOM PRICES!

EPSON RX80 £258 + VAT SHINWA CP80 £258 + VAT
EPSON FX80 £358 + VAT STAR 510 £258 + VAT
EPSON MX100 £419 + VAT STAR 515 £368 + VAT

We also have large stocks of sundries including ribbons, fanfold and roll paper, continuous labels, dust covers, etc.

For **FREE BROCHURE** and **DISCOUNT ORDER FORM** write now to:

Datatech Ltd (TMU)
8 Bellingham Close, Bury,
Lancs. BL8 2TU.

SOFTWARE SERVICES

SECURITY ANTI-THEFT DEVICE

FOR THE BBC MICRO

YOUR NAME AND ADDRESS DISPLAYED ON SCREEN AT SWITCH ON. CODE WORD MUST BE ENTERED BEFORE MICRO OPERATIONAL. YOUR MACHINE IS THEREFORE USELESS TO A THIEF.

PLUS: You have a PERSONALISED computer.

PLUS: * SEC. causes a temporary keyboard lockout.

INTRODUCTORY PRICE £15

Easily fitted within the unit, no soldering. 1.2 O/S.

Send name, address, phone no, machiner ser. no. and 5 digit code word (letters or numbers) to:

Dept. 1. Software Services, 65 South Mossley Hill Road,
Liverpool L19 9BG.



KUDUSOFT

SOFTWARE FOR THE BBC MICRO

STAR PATROL: Multi-stage Space War. Differing situations. Enjoy the thrills - test your skills, flying your Spacecraft against the enemy. Full Colour and Sound effects.

For Model B: £6.50 incl. p&p.

STARBATTLE: Destroy the Alien Starships before they get through to you. Avoid the onrushing meteorites. Increasing Skill Levels. Full Colour & Sound effects.

For Model B: £5.50 incl. p&p.

STARLANDER: Full use of MODEL A. Test your skills in landing your Starship under increasingly difficult conditions. Full Colour and Sound.

£3.50 incl. p&p

**KUDUSOFT, 130 Main Street, Tweedmouth,
Berwick-upon-Tweed. TD15 2AW.**

Tel: 0289 306622

"Always Something New"

PERSONAL BACKUP COPIES

VISION SOFTWARE

COPY FILE II allows the user to prepare personal backup copies of BBC micro programs. £5. incl.

COPY FILE II is able to backup:-

- LOCKED as well as normal programs
- FULL SIZE programs (i.e. up to &6E blocks). For use with the BBC Model A or B Operating system 1.2 - Simple to use.

COPY FILE II

Mail order only to: **VISION SOFTWARE**
1 Allington St., Liverpool. L17 7AD.

N.B. Users must not infringe any copyrights.

BBC PROGRAMMERS

High price or royalties paid for original games with high resolution graphics, written in BBC BASIC or Machine Code for the BBC Micro.

Software not used will be treated confidentially and returned to you.

Send your programs, on cassette, for our evaluation and comments to:-

**CCL Ltd., The Gables,
Watling Street, Hockliffe,
Leighton Buzzard, Beds. LU7 9NB.**

DRAWMASTER

A new and exciting drawing program for the BBC.

Ever wondered "If only I could draw that!"?

Now DRAWMASTER is here to help you.

Features:

- * Shapes outlined or filled * Rubber Banding * Arcs * Partial and full circles, Ellipses and Polygons * Rectangles and Triangles * Pixel and Point to Point * Alignment Grid * Text Entry * Load and Save Screen * Plotting Logic * Choice of Palette * Variable Cursor Speed * Keyboard Entry * etc.

Supplied on cassette with free ruler and manual.

ONLY £5.50 incl. p&p.

Send cheques and P.O.s made payable to:-

FAILSWORTH COMPUTERS
42 Paulden Drive, Failsworth, Manchester M35 0RW.
Telephone: 061-688 4544

Dealer enquiries welcome

Write your own 'Arcade Action' games with D.A.C.C.

Sprite-Gen

This amazing and revolutionary new piece of software, written for the BBC Model B by Dennis Ibbotson, represents the biggest step forward for BASIC programmers since the release of the BBC Micro itself. It allows you to create multi-coloured, fast moving SPRITES, controlled simply from your own BASIC program. Now you can write the kind of "Arcade Action" games you always dreamed of writing before you discovered that BASIC can't achieve the speeds necessary. Until now, only experienced machine-code programmers could produce "Ghost Gobbling Monsters" and "Light Speed" spacecraft. With SPRITE GRAPHICS all the creates and objects you can imagine are at your command, moving smoothly at any speed and in any direction you choose. Incredibly, SPRITES can be created using ALL SIXTEEN logical colours - eight steady and eight flashing. And as if that were not enough you animate your SPRITES with individual movements such as "a man who walks", "a bird that flaps its wings", "invaders that pulse menacingly", the possibilities are endless! When you own the SPRITE GENERATOR package you have access to every sort of high-speed animation technique you need. Buying expensive machine-code games may become a thing of the past. Look at the following impressive list of features you can access from your own BASIC programs ...

- Up to 32 SPRITES on screen at any time.
- Limitless SPRITE design using the SPRITE Generator program included in the package, allows ALL SIXTEEN logical colours "in each SPRITE" if desired. Full operating system capability of logical/actual colour assignment.
- There can be up to EIGHT different SPRITE DESIGNS active at one time, each of which can have up to THREE "CLONES", (copies of the primary SPRITE but each with individual movement control).
- Each SPRITE actually has TWO images which given slight differences will achieve the animation effects when the two are alternated. Or, if you choose, give the two images totally different designs and you have created two SPRITES out of one, usable alternately. This technique can also be applied to the CLONES which means that all 32 SPRITES can be animated, multi-coloured, moving objects!!!
- Once you have completed the design of your SPRITES using the simple grid-based generator utility, they and the high speed machine-code routines that control their movement are secreted into RAM and the BASIC system is ready to accept your own program lines through which you can direct the SPRITES to appear, move, disappear or just remain stationary, with the simplest commands you could imagine.
- SPRITES can be linked together in pairs or groups to produce large scale animation. Of course, if you wish they can be as small as a single pixel.
- Your own creations can move in front of each other with no loss of detail.

SPRITE-GEN is supplied as a package containing:


- ★★★ Sprite-Generator program
 - ★★★ Two 'fast-action' demonstration programs
 - ★★★ Sprite-Gen control routines
 - ★★★ Illustrated user manual with examples and listings
- All for only £17.95 (pp and VAT included).
In U.S. \$49.95

INTRODUCING **SUPER-7** ● SPACE PILOT TEST ● FIRE-CHIEF
● GUNS OF NAVARONE ● BOUNCER
● CHOPPER-CHASE ● SPACE RESCUE
● CREATURES OF THE DEEP

The best value in arcade-type games available today. Seven exciting games on one cassette using full colour, sound and machine code. (BBC Model/B) ONLY £8.95 (pp and VAT included)

DRAGON BBC MODEL/B TRS 80 C/C 32K
747 FLIGHT SIMULATOR

Superbly realistic instrumentation and pilot's view in lifelike simulation which includes emergencies such as engine fires and systems failures. This program uses high resolution graphics to the full to produce the most realistic flight-deck display yet seen on a home computer. There are 21 real dials and 25 other indicators (see diagram). Your controls operate throttle, ailerons, elevators, flaps, slats, spoilers, landing gear, reverse thrust, brakes etc. You see the runway in true perspective. Uses joysticks and includes options to start with take-off or random landing approach. "A real simulation, not just another game." (Your Comp. Apr. 83).

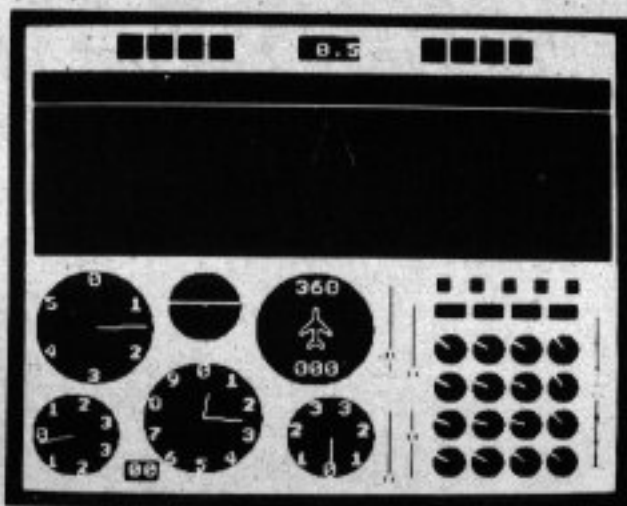

ACTUAL SCREEN PHOTOGRAPH

CASSETTE £9.95 (pp and VAT included).
In U.S. \$27.95 (pp included)

(U.K. orders despatched within 48 hours)

Dealer and foreign distributor enquiries now being taken.
Software writers - sell your programs in the U.S. through DACC.

In U.S. order from sole distributor: Frank Ashton, Dept. MU2, P.O. Box 7037,
Chula Vista, CA 92012-7037.
(California residents add 6% Sales Tax)

To DACC Ltd., 23 Waverley Road, Hindley, Wigan, Lancs. WN2 3BN.

Please rush me:

- ___ qty. SPRITE-GEN at £17.95 each (BBC Model/B only)
- ___ qty. SUPER-7 at £8.95 each (BBC Model/B only)
- ___ qty. 747 FLIGHT SIMULATOR at £9.95 each (state machine)

I enclose a cheque/P.O. to the value of _____

NAME _____

ADDRESS _____

POST CODE _____

INCREASE YOUR FIRE POWER !!!!

There you are, ZAPPING away with your laser, happily defending your planet when; suddenly - you're surrounded. Your one chance? a SMART BOMB. You reach for the keyboard - your spaceship nose dives and CRASH!!! - Wiped out. Later, on your cloud, playing your digital harp, you think "If only the SMART BOMB button had been next to the laser on the handset? I'd be alive today.", "If only the joystick had sprung back to centre at least I'd be still up there fighting."

NOW!! TO SAVE THE WORLD. THE NEW DELTA 14 RANGE OF HANDSETS FROM VOLTMACE.



Used for years by DATABASE video game owners these handsets have sprung return, nylon coated steel joysticks with graphite wiper potentiometers for longer life and SM00-00-00-THER control, plus 12 pushbuttons with two extra fire buttons to share the wear. The DELTA 14 comes in two parts. One handset will plug into the 15 way "D" plug to give analogue joystick plus three button functions. The second part is the DELTA 14B/1 adapter box which plugs onto the 15 way "D" and connects to the user port. This gives use of all 12 buttons on the user port using a 3 x 4 strobed matrix. The eighth line is used to select a second joystick which can be plugged into the adapter box. Suggested software routines included with each handset

DELTA 14 B JOYSTICK HANDSET FOR BBC £10.95
DELTA 14 B/1 ADAPTER BOX & CABLE £13.95

Including VAT and 1st Class Post.




Cheques or postal orders to:

VOLTMACE LTD., Park Drive, Baldock, Herts (0462 894410)
Callers welcome Monday to Friday. Trade quantity discounts.

"Maybe I could have a gatlin gun, firestreak missiles, photon torpedoes, warp drive, Hyperspace drive"

OUR EPSON PRINTERS ARE READY TO GO!

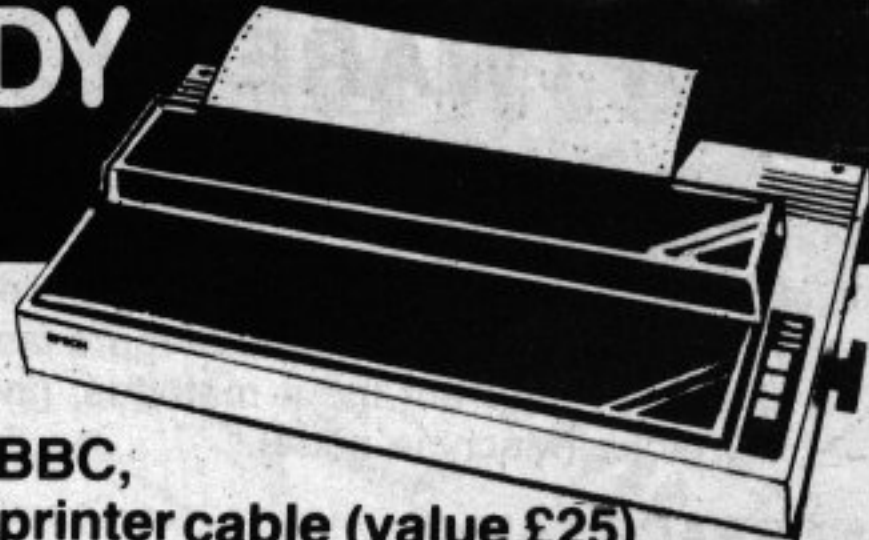

That means...

- Supplied WITH a BBC, VIC-20 or CBM64 printer cable (value £25)
- Tested before despatch
- Fitted with a 3amp fused mains plug
- Securicor next day delivery FREE to UK mainland addresses

Ready to go with BBC Model B, VIC-20 or CBM64

RX80 £269 plus VAT (£309.35 inc)

FX80 £379 plus VAT (£435.85 inc)

MX82 £319 plus VAT (£366.85 inc)

MX100 (illus.) £424 plus VAT (£487.60 inc)

If your machine is not mentioned above phone us on 0772 57684.

Ring us for a competitive quotation on:
Anadex Printers, CBM, Apple, Sirius or IBM.

Official Orders Welcome

24hr Answerphone

**PRESTON
COMPUTER
CENTRE**
6 Victoria Buildings, Fishergate, Preston PR1 2NJ.
Telephone: 0772 57684

Please send me: Qty _____ Model _____ at £ _____

for use with BBC/B CBM64 VIC-20

Access Barclaycard Cheque enclosed

HALF-HEIGHT DISC DRIVES

	UNCASED	CASED	CASED & CABLES
40 Track S/S	£125.00	£135.00	£145.00
40 Track S/S	£135.00	£145.00	£155.00
40 Track D/S	£170.00	£180.00	£191.00
80 Track D/S	£210.00	£220.00	£230.00

Plus VAT at 15% + £8 carriage. Disc Interface Kit — £85.00.
Allow 28 days for delivery — and qualify for additional 5% discount!

Dealer Enquiries Invited.

Format disc and User Guide £5 + VAT

7 DAYS TRIAL PERIOD. 12 MONTHS WARRANTY.

CARSON DEVELOPMENTS (MU),

84 Highfield Road, Collier Row, Romford, Essex RM5 3RU.

Telephone: 0708 27043

S.P. ELECTRONICS

ALL IN STOCK

BBC SPECIALISTS

BBC Model B 1.2 O.S	£399
Upgrade Kits A to B	£60
Disc Operating System	£95
Disc Drives	from £212
Cassette Recorders	£18.90
G3WHO RTTY PROGRAM	£7.50
Circuit board for RTTY decoder (inc. instructions)	£6.30
Computer Dust Covers	£3.00
CP80 and Star 510 Printers (inc. cable)	£330.00
Joysticks (pair)	£13.00
Printer Cable (Centronics)	£12.90
VIEW Word Processor	£59.00
WORDWISE Word Processor	£39.00

Wide selection of software, books, leads, plugs, etc.

SAE for full list. All available Mail Order

48 Linby Road, Hucknall, Notts. NG15 7TS.

Tel: 0602 640377




(all prices include VAT)

All prices apply while stocks last.

Carriage extra

THE EASY WAY TO PLAN YOUR GRAPHICS

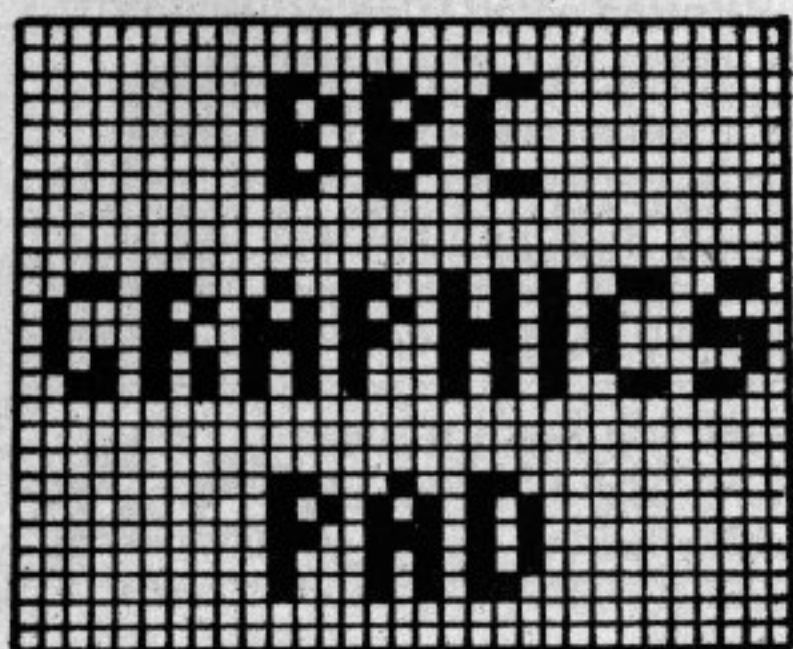


20 Sheets for Mode 7
10 Sheets for Mode 0
10 Sheets for Mode 1/4
10 Sheets for Mode 2/5

★
Tab Positions.
Plot Co-ordinates.
Space for Listings.

★
£2.50 each

I.Q. COMPUTER PRODUCTS
P.O. BOX 81,
SWINDON, WILTSHIRE.



BBC MICRO CONSOLES


Not just a monitor/tv stand but an expansion console which gives your micro the professional look. Protects and encloses your micro with room for disc drives and 2nd. processor or teletext adapter etc., all untidy connecting wires safely out of sight within the console. Made of light yet strong aluminium with a textured finish in matching BBC colour. Coming soon a bolt on extra module to the console for further expansion options. YES this console will grow with your needs. Basic BBC console as shown **£39.99** + £4 carriage MAIL ORDER ONLY. Viewing by appointment only.

Please add 15% VAT.

For further information or send cheque to:

Silent COMPUTERS

• The console will house the Torch Disc Pack

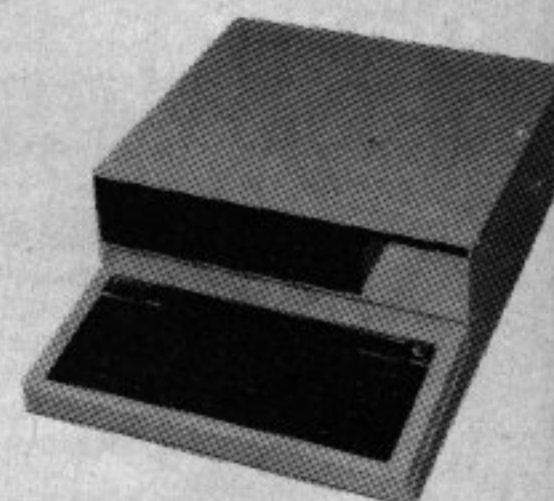

Matching Printer Stand, can double for VDU Stand over the micro — only **£14.99** + £2 carriage

27 WYCOMBE ROAD, LONDON N17 9XN.
TEL: 01-801 3014 (24 Hr Ansaphone)

ORION SOFTWARE

PROFESSIONAL PROGRAMS FOR THE MODEL B

STAR HAWKS £6.95

Can you stop the star hawks before they stop you? Slow work means the generation of more laser firing mutant hawks. Choice of different input methods, (including joysticks). Top ten table. (Machine code).

SPACE TANK £6.95

After your space tank has landed on the Planet Orion, a series of alien tanks and spacecrafts will attack. This game makes use of the beeps fast scrolling ability. (M.C./Basic)

DESIGN £4.95

If you're fed up working out the mathematics of user defined characters then "Design" is for you. Design enables you to draw/modify characters on an 8x8 grid, leaving the work to the machine.

HANGMAN £4.95

Let words become fun with our 3 language version of the popular game of hangman. New words can be added or old ones removed.

ALL PRICES ARE FULLY INCLUSIVE!
SUBTRACT 1 POUND FOR EACH EXTRA PROGRAM
OR SEND £20.00 FOR ALL FOUR!

FREE with all orders is our version of NOUGHTS AND CROSSES!!!

MAIL ORDER ONLY

ORION SOFTWARE,
11 Buttercup Close,
Romleighs Park,
Harold Wood,
Essex RM3 0XF.

GAMES WANTED

"Everyone has got at least one novel inside him, and every BBC Micro owner has at least one original game waiting to be programmed." — **Zen in the Art of**

Computer Programming.

So says our editor in his forthcoming book. Is he correct though? Have you got a games program locked away in your subconscious, just waiting to see the light of day?

If so, get in touch with us right away — we're only too willing to hear from you. And we've got our team of experts ready to help evaluate your work and add any necessary finishing touches.


Of course, if it's good enough, we shall want to include it in the pages of BBC Micro User. So send a copy of your original games program, on cassette or disc, to:

*The Editor, Micro User, Europa House,
68 Chester Road, Hazel Grove, Stockport.*

And please mark your envelope clearly "GAME".

Viglen
Acrylics Limited

proudly present the only
SPECIALLY DESIGNED

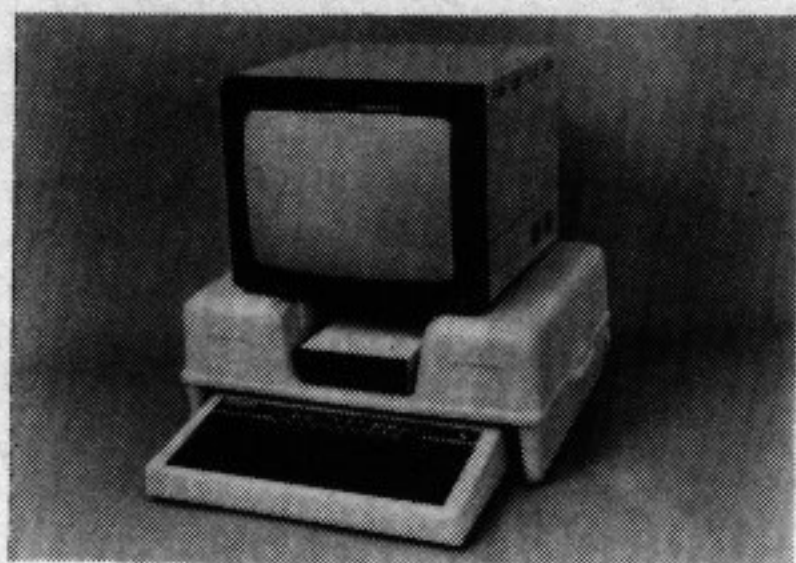

TOTAL CONTROL CONSOLE

- ★ Keeps your hardware clean and tidy
- ★ Accommodates officially approved monitor
- ★ Wire tidy – no messy cables
- ★ Tuck away your computer when not in use
- ★ Easily transportable
- ★ Colour matched to the BBC Micro

Console Unit only **£35.00** + VAT
Console Unit + power supply **£70.00** + VAT

Please phone for any special requirements, such as Cooling fans, switches, sockets etc.

VIGLEN Computer Supplies, Unit 7, Trumpers Way, Hanwell, London W7 2QA.
Telephone: 01-843 9903

PRESENTING ...



SPEED is a full screen text editor for all BBC MICRO'S enabling editing of BASIC and assembler programs, teletext graphics and text screens, letters and documents with save, reload and print capabilities.

- | | |
|--|--|
| * Instant edit response 40 or 80 character screen. | * Full auto scroll for rapid text entry. |
| * Text width up to 280 characters. | * Utilities including printing, word-count screen preparation and case conversion. |
| * 29 editing commands including Global search/replace, insert/delete, move/copy. | * Multiple text into one (from tape). |
| | * Compatibility with all BBC operating systems. |

£13.95 cheques and P/O made payable to
MULTISOFT, 32 Redfield Hill, Oldland Common, Bristol.
BS15 6TQ

Top royalties paid for quality programs.

ELECTRONICS WITHOUT TEARS

- * To extend the use of your computer take advantage of our hardware designs.
- * To understand the basis of electronics follow our twelve-part series.

TEACH-IN 84


Ideal home-study course with simple experiments. Starting in the October issue.

Hardware add-on designs are featured each month. Also regular features on interfacing techniques.

**OCTOBER ISSUE
ON SALE SEPT. 16**

**EVERYDAY
ELECTRONICS
and computer PROJECTS**

micro-links

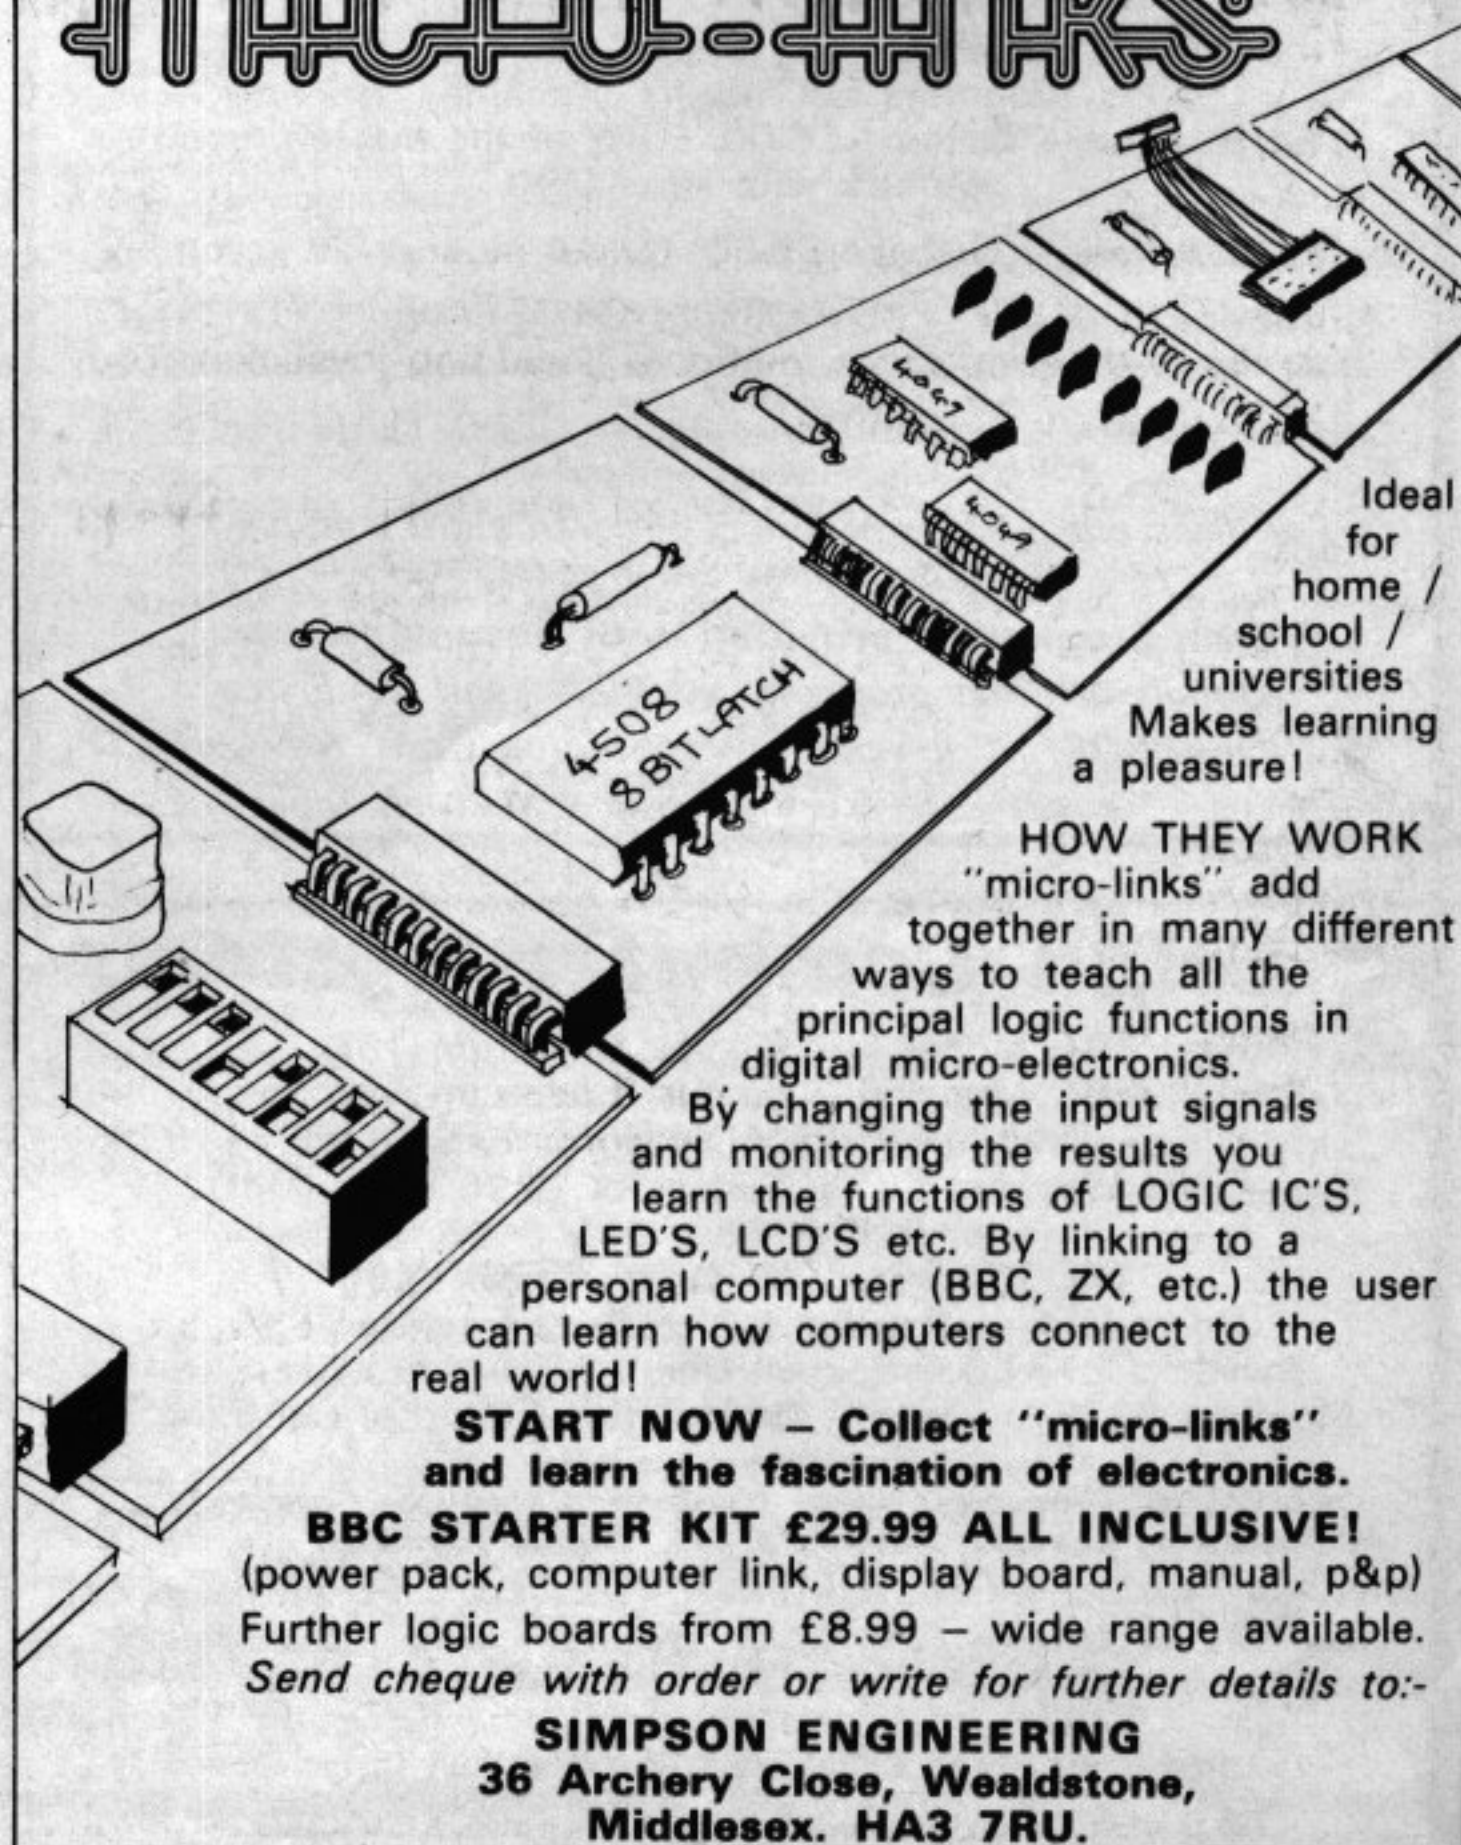

Ideal for home / school / universities
Makes learning a pleasure!

HOW THEY WORK
"micro-links" add together in many different ways to teach all the principal logic functions in digital micro-electronics. By changing the input signals and monitoring the results you learn the functions of LOGIC IC'S, LED'S, LCD'S etc. By linking to a personal computer (BBC, ZX, etc.) the user can learn how computers connect to the real world!

START NOW – Collect "micro-links" and learn the fascination of electronics.

BBC STARTER KIT £29.99 ALL INCLUSIVE!
(power pack, computer link, display board, manual, p&p)
Further logic boards from £8.99 – wide range available.
Send cheque with order or write for further details to:-

SIMPSON ENGINEERING
36 Archery Close, Wealdstone,
Middlesex. HA3 7RU.

northern computers

micro computer systems for all applications

**we supply, support,
and service:**

LISA
IBM
Apple II, III.
Torch
Acorn Electron
Acorn Econet
Fibre - Optic
Networks
Newbrain
Sinclair
B.B.C. Distributor

TRAINING SOFTWARE
SUPPORT - CAL primary
and middle school,
graphics design,
programming, accounts
training packages,
professional accounts,
e.g. - legal,
estate agents etc.

Visitors are invited to evaluate and test LISA, and B.B.C. econet.
please contact: GARETH LITTLER or MARK HOWARD

EDUCATION & TRAINING DIVISION.

Northern Computers, Churchfield Road,
FRODSHAM, CHESHIRE WA6 6RD Tel: (0928) 35110

location:



ADMINISTRATIVE SOFTWARE
SUPPORT - Timetabling and
options, database records and
filing packages, word processing,
accounts.

ADVERTISERS INDEX

3D Computers	33	Micro Power	11, 30
Aerospace Developments	60	Micro-Aid	107
Aimgram	97	Microdraw	97
Alpha Disc	15	Micronet	84, 85
AMS	59	Micropower	98
Anthony Ashpitel	112	Midwich	14
Antler	104	Multisoft	123
Arrowsoft	89/123	Musicsoft	96
Australian BBC	120	National Extension College	96
Bridge Software	126	National Micro Centre	44, 45
Bucon	115	Norsoft	124
CCL	120	Northern Computers	124
C Tech	56	Oakleaf Computers	103
C/WP	61	Opus	36
Carson Development	122	Orion Software	106
Chalksoft	96	PJ Microsystems	90
Clares Micro Supplies	10	Pace	38/125
Computer City	127	Paperlogic	12
Computer Concepts	2, 8	Penguin Books	106
Computerama	71	Pitman Publishing	107
Contex	101	Preston Computer Centre	121
Control Universal	72	Primasoft	126
Copyfile	120	Printerland	119
DACC	121	Ricksoft	90, 103
DA Computers	101	SP Electronics	122
Data Efficiency	43, 96	Scholarsoft	124
Datatech	120	Scorby Software	124
Dataware	108	Sherston Software	126
Dedicated Microprocessors	120	Silent Computers	122
Doctor Soft	116	Silverlind	88
Edinburgh Turtle	98	Simon W Hessel	64
Educare	107	Simonsoft	103
Electronequip	82	Simpson Engineering	123
Everyday Electronics	123	Sir Computers	13
Failsworth Computers	120	Skyleader	90
Garland Computing	112	Small School Software	126
Geophysical Systems	40	Softsmith	90
Glengary Soft	103	Software Services	120
Golem	104	Stack	86
Guildford Computer Centre	25	Superior Software	16
HCCS	125	System	119
Hawthorn	109	Tandata	98
Home & Business	94	Technicare	94
IQ Computers	122	Technomatic	71, 75
Ikon	34	Tekform	98
Integrex	6	The Computer Room	101
Ixon Software	115	Third Program	97
Jasmine Software	3	Twillstar Computers	7
John Wiley & Sons	9	Viglen	21
Kingsley	107	Voltmace	121
Kosmos	119	Walters Computers	112
Kudusoft	120	Watford Electronics	26, 27, 28, 29
Leigh Computer	124	Wordsworth	108
Level 9	68/125		
Lincoln Microsystems	116		
Lowland Design	108		
MP Software	104		
Magic Software	108		
McGraw-Hill	109		
Merlin Computer	115		

Electron User Advertisers

Acorn	12, 13
Computer Market	6
Minor Miracles	6
PSS	16

SCHOLARSOFT

Computer guided learning for BBC Micro (B). Practical Programs for Today's Teaching.

The Bunsen - Science £6.00. Parts of the bunsen, good graphics with simulation.

Acids & Alkalis - Science £5.50. Colour monitor/TV essential.

Numbers in Order - Mathematics (3 programs) £7.00. The user involved by putting numbers in order using the cursor.

Capital Letters - English (3 programs) £7.00. Large printing - visually attractive.

For discs add £2 per program. Programs are suitable for children aged 9-13 years.

Each program is provided with documentation.

Details of other programs available send S.A.E. to:
SCHOLARSOFT, 'Coniscliffe', Woolsington Gdns, Newcastle upon Tyne NE13 8AP.

TEXT AND GRAPHICS PLOTTER FOR THE B.B.C. MICRO

The attractive layout of text and graphics is essential to good programming. Our plotter pad allows you to plan text only, graphics only or mixed displays in any mode, making programming both easier and quicker.

A 60-sheet pad with card backing and protective cover - £1.90 incl. postage.

Cheques etc to:

**Scorby Software Services, P.O. Box 27,
Scarborough, North Yorkshire.**

Leigh Computer Systems

BBC Model A - Sinclair Spectrum 16K

BBC Model B - Sinclair Spectrum 48K

Dragon 32, Pace Discs from £212

Cabel Monitors £225, Epson RX £295 - FX £410

Star 510 £295 - 515 £415

CP80 £295 - Juki Daisy Wheel £485

Upgrade A to B - Pace Disc Drive Interface £95

Joysticks £17.50 - Speech Chip £55 - Wordwise £46

TV Monitors £235 inc. lead - TV Monitors (Remote) £265 inc. lead.

Quality software available:

Acornsoft, Program Power, Bugbyte, Computer Concept, Micropower, Superior Software, IJK, Digital Fantasia, etc, etc.

Any two - deduct £1.25. Any three - deduct £2.50 off list price.

Send SAE for software lists - state machine. Any make of computer supplied at competitive prices. Don't be disappointed, order your Electron now.

Large items - add £5.00 p&p. All prices fully inclusive.

36 Derby Road, Hinckley, Leicestershire LE10 1QF.
Telephone: 0455 612139

Norsoft

Software for the BBC 32K and Spectrum

I.J.K.

GEMINI

Send S.A.E. for details

**91 Roundwood Road, Northenden,
Manchester M22 4AD.**

FOR THE BBC MICROCOMPUTER

TINY PASCAL

PASCAL-T is a 16K Eprom program capable of compiling source PASCAL into a compact very fast threaded-interpreters-code. Full editor and disc support are included and the program is supplied with comprehensive documentation.

Price £59.00 + VAT

X CAL

An expert computer-aided learning package in 16K Eprom and support disc. No programming skill required to construct learning sessions as the program is screen driven. Facilities include text pages, graphics and histograms.

Price £65.00 + VAT

FORTH

FIG-FORTH in 8K Eprom together with manual.

Price £34.72 + VAT

LOGO-FORTH

A 16K Eprom program introducing this very powerful but extremely friendly Turtle-graphics language. Users also have full access to the FIG-FORTH support nucleus. Full documentation is included.

Price £59.00 + VAT

Retail/Mail Order/Dealer Enquiries to:-

H.C.C.S. Associates

533 Durham Road, Low Fell, Gateshead,
Tyne & Wear NE9 5EY. Tel: (0632) 821924

Retail sales also at:-

H.C.C.S. Microcomputers

122 Darwen Street, Blackburn, Lancs.
Tel: (0254) 672214

BBC FORTH

£15

"For your money you get not only a very good implementation of the popular FORTH language but also a 72 page manual ... Once you have got an idea of the fundamentals you should get better value out of this pack than virtually any other program you could buy. In fact, the only reason I can think of for not buying this cassette is that you already have a version of FORTH!" - *LASERBUG April 83*

"rqFORTH is fast and has a first-class screen editor ... Overall, a good buy" - *Computing Today July 83*

rqFORTH costs just £15 (inclusive) and runs on 16K or 32K BBC micros. It:

- ★ needs no added hardware and works with any MOS version;
- ★ works with cassette and disc;
- ★ is FORTH-79 STANDARD and has fig-FORTH facilities;
- ★ provides 260 FORTH words and is infinitely extensible;
- ★ allows full use of the MOS via *MOS, CALL and EMIT;
- ★ permits use of all graphic modes, even 0-2 (just!);
- ★ has an excellent full-screen editor;
- ★ runs faster than BBC BASIC;
- ★ includes a 72 page manual, a 20 page disc supplement and a summary card for quick reference;
- ★ is used by hundreds of people, worldwide.

BBC FORTH TOOLKIT

£10

"Level 9 promise to support rqFORTH and this pack proves it. It provides the source code for all sorts of useful routines and examples of how to program in FORTH. With so much on one cassette it would be good value at twice the price." - *LASERBUG April 83*

The rqFORTH toolkit costs just £10 (inclusive) and adds the following facilities to FORTH:

- ★ a full assembler, providing machine-code within FORTH;
- ★ turtle graphics, giving you easy-to-use colour graphics;
- ★ decompiler routines, allowing the versatile examination of your compiled FORTH programs;
- ★ the full double-number set (with many extensions);
- ★ an example FORTH program and demonstrations of graphics;
- ★ other useful routines.

ALL PRICES INCLUDE P&P AND VAT. ALL programs are in stock and orders will be sent within 2 days of receipt. Please send order or SAE for catalogue, describing your micro, to:

LEVEL 9 COMPUTING

Dept U, 229 Hughenden Road, High Wycombe, Bucks HP13 5PG

THE REAL AMCOM DISC FILING SYSTEM

One of its distinct advantages against the Acorn DFS is the speed in which it handles Random Access Files (refer Benchmark figures), consequently, it can load wordwise files in approximately half the time taken by the Acorn DFS.

PRINT 1000 numbers	9.8	Move PTR 1000 places	2.9
PRINT 100 strings	56.2	Write test relative file	51.0
INPUT 1000 numbers	5.7	Read test relative file	24.2
INPUT 100 strings	22.7	Write relative file backwards	81.0
BPUT 1000 bytes	4.5	Read relative file backwards	36.0
BGET 1000 bytes	3.4		

This independent disc filing system adds greater flexibility to your BBC Computer. It has two distinct modes which auto select on booting the system. Mode zero is the standard mode which retains compatibility with presently available software. Mode one, the extended mode, allows for sixty-three file names per disc, over 100% increase on the existing DFS, and also permits the file names to be up to fifteen characters in length, providing much greater scope for meaningful file names. In both modes page is set at &1500. This gives 10% more usable memory than Acorn's DFS, in modes 0, 1 and 2. If you already have a Disc interface fitted, it is very easy to upgrade, you simply remove the DFS Eprom and replace it with the Amcom DFS Eprom, if not then it is possible to purchase an entire Disc interface kit (consists of 11 I.C.'s) with this DFS track cutting is not required. **Also includes 8 way DIL switch to allow start up options to be set. (see below).**

Link 1 Determines if the system starts up in 40 or 80 tracks
Link 2 Select Acorn or Extended mode at start-up
Link 3 & 4 Selects type of drive ie. Shugart, Canon etc.

Link 5 Select auto-boot or not, on 'break'
Link 6-8 Select screen mode on start-up, ie. model 0 to 7 etc.

NINE NEW COMMANDS ARE NOW AVAILABLE

- *Clear Quickly and easily erases a entire disc
- *Format Formats drive 0 to 3 in either 40 or 80 tracks
- *OPT2,n Alters the number of sectors per track to n
- *OPT3,n Alters the number of tracks per disc to n
- *OPT5,n Sets the start of the DFS buffer (see OPT7)

- *OPT6,n Provides control over which part of the file spec. will be displayed ie. only display directory and program length, or just display drive and load address.
- *OPT7,n Sets the length of the DFS buffer
- *OPT8,n Double steps the disc drive to allow the reading of 40 track discs on 80 track drives
- *SYS Selects either Acorn mode or Extended mode
Commands now include *Access

There is a built-in formatter which will format in either forty or eighty tracks in both modes of operation. This formatter also allows for user definable parameters to be included for the development of software protection. With this disc filing system a user definable buffer can be used while compacting the disc. This will enable disc compacting to be carried out without overwriting any programme in memory. Alternatively a new disc may be formatted without any resident programme being overwritten.

This DFS also allows for the use of wildcard characters, using either the # symbol for a single wildcard and the * character for multiple wild characters. (e.g. CHAIN "P#" could be used to chain a program called PRINTER as long as there are no other files whose names begin with P).

This DFS is totally compatible with Econet etc., and is complete with a utilities disc and comprehensive manual. The utilities disc contains many useful programmes including printer screen dumps in all modes, including High Res. (Epson & NEC 8023). It also has a nibble editor to scan discs, read data, edit them, and then write back to the disc. Plus a utility to assist in the transfer of cassette files to disc.

Available now direct from Pace or contact your local dealer.

Comes complete with disc, 8 way DIL switch, manual and full fitting instructions at £34 inclusive of VAT.

Also available as a complete Disc Interface Kit (including DFS) at £95 inclusive of VAT.

PACE SOFTWARE SUPPLIES LTD., 92 NEW CROSS STREET, BRADFORD BD5 8BS.



0274 729306



QUALITY BBC SOFTWARE

DATABASE:- £12.95 Cass. £15.95 Disc. (INC.)

Make card-filing obsolete. For cassette and disc operation (32K), many facilities found only on more expensive systems: *Variable field length. *Fast sort, any field. *Search and replace. *Fast search through fields. *Specific, between-range, wildcard search. *Record amend (on screen editing), delete, replace. Can be used as sophisticated mailing list as well as for school/class/club/business records, directories, inventories, catalogues, as teaching resource where data compilation and classification are required. Comprehensively documented.

EEL:- £7.95 INC

The only way to learn number bonds and tables. Guide the eel and eat the number family. 20 levels of difficulty, making it suitable for 6 year olds upwards. Includes full user performance record for teacher/parent. Keyboard or joystick operation. Very addictive.

PLOTAPIC:- £7.95 INC.

Display and presentation program that allows pictures to be created using co-ordinate procedures. Results can be linked together to form story. Comes complete with picture story of Nativity. Age range - 8+.

MICRO CASE:- £35.00 + £3.00 pp.

Smart, strong, foam-lined lockable. Holds BBC micro, recorder/disc drive, cassettes, cables. Black with aluminium trim.

Cheque, Access/Visa (Phone anytime).

Official order to:

PRIMASOFT

FREEPOST, GLOSSOP, DERBYS. SK13 9YB.

Tel. GLOSSOP 62743

Excellent royalties for quality educational software.

DEALER ENQUIRIES WELCOME

BRIDGE SOFTWARE

MOLECULE
or

Beat the Bug

A game of logic for BBC Model B

The survival of mankind is at stake

Can you beat the bug?

A new virus is decimating the world's population. The virus has been successfully isolated. Now YOU must discover the structure of its molecule so that a vaccine can be made.

Fed up with zapping?

Looking for something a little more demanding on the grey cells? then MOLECULE is the game for you.

Demands the skill and intuition of the true scientist.

But beware, this game is so compulsive the package ought carry a Government Health Warning!

Send £6.90 for quality cassette

STOP PRESS: Our brilliant BRIDGE MAN

gobbler game is still available at **£6.90**



Dept BU, 36 Fernwood, Marple Bridge,
Stockport, Cheshire, SK6 5BE, England.

Sherston Software

Sherston Software offer a range of educational programs for primary school age children designed by teachers and written by professional programmers. It is our policy to produce high quality programs at reasonable prices.

M. Savory, Gloucester Education Adviser, writes:

"It happens that the programmes with the label 'Sherston' had a remarkable reception. Without any exception all the teachers found the programmes attractive, all of them said they would use the programmes themselves with infants and lower juniors. It has never been my habit to recommend software in any blanket form at all but merely to recommend particular programmes to the teachers. However I do feel that the quality of the programmes you sent to me may trigger me to give such a blanket recommendation".

READING PROGRAMS

Short Vowel Sounds: BBC Model B and Spectrum 48K

A very comprehensive program to practice short vowel sounds using simple words and pictures. Options include diagnostic, practice and final assessment modes. The speed, number of retries and weighting on particular vowels can all be altered. Nicely presented with graphics and sound effects. **7.00 pounds.**

Word Builder 1: BBC Model B

Word Builder builds up words exactly as children should and shows the sequence on the screen for the children to sound out and read at their own speed. Includes sections on initial consonants and short vowel sounds, consonant blends and digraphs, double consonants and vowel-consonant digraphs. Presented in large, colourful, lower case letters. **4.00 pounds.**

Word Builder 2: BBC Model B

As word builder 1, but introducing vowel digraphs. **4.00 pounds (or 6.00 pounds for both Word Builders).**

MATHS

Maths Snap: BBC Model B

A 'game' for 1, 2, 3 or 4 players to practice number bonds. Options include addition, subtraction, (or both), multiplication and division (or both) all at five levels of difficulty. The time allowed and the number of questions per game can both be altered making it suitable for all ability levels. Children love it! **6.00 pounds.**

All programs have been thoroughly tested in the classroom and are accompanied by full explanatory notes. We trust our customers not to break the copyright laws. If you are not satisfied with our product, return it within seven days and get your money back.

Orders to Sherston Software, 1 Noble St., Sherston, Malmesbury, Wilts., SN16 0ND.

Cheques or P/O's payable to Sherston Software.

Allow 28 days for delivery. Send SAE for further details.



STUDY PACKS and STUDY AIDS

For BBC Model A(32K) & B
Sinclair Spectrum 48K

SMALL SCHOOL Software STUDY PACKAGES are designed to a high specification by experienced teachers for use both at Home and in School.

The STUDY PACKS are based on well established individualised learning techniques and are aimed at students working on their own or in small groups.

They consist of a suite of objective matched lessons, a review program and a Post Test with diagnostic on cassette tape, plus a Manual/Workbooklet that contains User Notes, Pack description, essential consolidation exercises with answers and special stationery and Record Sheet. The STUDY AID packages are special one off computer based programs or collections of programs that are of use in support of learning both at home and in school. They are again fully supported by a User's Manual and are created to the same high specification as the STUDY PACKS.

Study Pack Titles include:

The Theorem of Pythagoras (Model B) -

Designed to teach the Theorem of Pythagoras and its applications.

First Steps in Algebra (Model B and Spectrum) -

Introduces via 'mapping machines' the use of letters to define variables in simple operations leading to the solution of simple equations and problems.

Algebra Two (Model B) -

Follows on from 'First Steps...' to teach collection of terms, simplification of simple linear algebraic expressions not including brackets and the solution linear equations in one variable.

Introduction to Trigonometry. (Model B) -

From considering a rotating unit vector, the Study Pack establishes the sine and cosine curves for 0° to 360° and the use of tables to find the sine or cosine of any angle greater than 90°. By use of enlargements, shows how these ratios can be applied to the solution of right angled triangles.

Study Aid Titles include:

Mental Arithmetic Tests (Model B, Spectrum) -

Is designed to help implement the recommendations of the Cockcroft Committee that there be frequent practice in Mental Arithmetic. The Study Aid provides balanced Tests at 7 levels and 3 degrees of difficulty for youngsters aged 8 upwards to 14, covering most areas of basic numeracy. The package contains two versions, one for class use, the other for the individual and includes a Tables Practice program.

All Study Packs cost £7.95, while the Study Aids cost £6.95.

The prices include Postage and Packing.

Send for the latest Information Pack to:

**SMALL SCHOOL SOFTWARE,
1-2 KING STREET,
LUDLOW
SHROPSHIRE.**

COMPUTER CITY

THE COMPUTER CAPITAL OF THE NORTH

78 VICTORIA ROAD, WIDNES, CHESHIRE. 051-420 3333

DISC DRIVES (including
Disc Utilities and Manual)
Pace Single 100K
Drive £212.25
Pace Twin 100K
Drive £388.00
Acorn Twin 400K Drive
(80 Track) £804.00
Torch Twin 400K +
Z80 & 64K £897.00

**SPECIAL
OFFERS**

PRINTERS
Seikosha GP100A (including
free 'Screen Dump'
Program) £219.00
Seikosha GP250X ... £270.00
Epson RX80 £319.00
Epson FX80 £455.00
Smith Corona TP/1
(Daisywheel) £489.00

MONITORS
Microvitec 14" Colour
Monitor £287.50
Sanyo Green
Monitor £89.00
Sanyo 14" Colour Monitor
(Composite) £269.00

BBC
BBC Model B £399.00
BBC Model A £299.00
BBC Model A +
16K £338.30
BBC Model A +
16K & VIA £345.00

Carriage charges on Micro's, Monitors, Disc Drives and Printers £9.00

— **Special Summer Offer** —

CASSETTE RECORDER (BBC Compatible) **£19.95** P&P £1

NEW — STACK LIGHT PEN including **FREE** game
(Concentration) **£28.75** P&P 50p



ADVENTURE GAMES FOR THE BBC

Inc. VAT

The Golden Baton
(A/B) £10.30
The Time Machine
(A/B) £10.30
Arrow of Death (Pt 1)
(A/B) £10.30
Arrow of Death (Pt 2)
(A/B) £10.30
Escape from Pulsar 7
(B) £10.30
Circus (B) £10.30
Feasibility Experiment
(B) £10.30
The Wizard of Akyrz
(B) £10.30
Perseus and Andromeda
(B) £10.30
Ten Little Indians
(B) £10.30



Star Trek/Candy
Floss £6.50
Hangman £4.50
Super Hangman £4.50
Beep Beep £4.50
Beebmunch £6.50
Mutant Invaders £6.50
3D Maze £4.50
Model A Invaders £5.50
Model B Invaders £7.50
Word Pro £10.50
Atlantis £7.50
Flags £4.50
Hyper Drive £6.50
Strato Bomber £7.50
Leap Frog £7.50
5-a-Side Soccer £7.50
Pontoon and Patience £7.50

Kosmos

The French Mistress Level
A £9.95
The French Mistress Level
B £9.95

Doctor Soft

747 Flight Simulator £6.95
Wolf Pack III £7.95
Kremlin £6.95
Harmony £7.95

Bourne Educational Software

Animal/Vegetable/Mineral ...
..... £5.70
Word Hang £8.99
Happy Numbers £8.99
World Wise £8.99
Timeman One £8.99



Home Finance £10.00
Early Learning £10.00
Music £10.00
The Computer Prog.
(Vol. 1) £10.00
The Computer Prog.
(Vol. 2) £10.00
Painting £10.00
Drawing £10.00
Games of Strategy £10.00
Fun Games £10.00



Business Games £9.95
Tree of Knowledge £9.95
Peeko - Computer/
Manual £9.95
Algebraic
Manipulation £9.95
Creative Graphics
Cassette* £9.95
Graphs & Charts
Cassette* £9.95
Desk Diary/Manual £9.95
Lisp Cassette* £16.85
Forth Cassette* £16.85
Philosophers Quest £9.95
Sphinx Adventure £9.95
Castle of Riddles £9.95
Monsters £9.95
Snapper £9.95
Planetoid £9.95
Arcade Action £11.90
Rocket Raid* £9.95
Meteors £9.95
Arcadians £9.95
Sliding Block Puzzles £9.95
Cube Master £9.95
Super Invaders £9.95
Missile Base £9.95
Starship Command £9.95
Countdown/Doom £9.95
Snooker £9.95
Number Balance £9.95
Word Sequencing £9.95
Word Hunt £9.95
Missing Signs £9.95

Quick Silva

Music Processor £14.95
Protector £7.95
Wizard £6.95

Simonsoft

Disassembler £6.95

SPECIAL OFFER


ORDER 2 CASSETTES
— DEDUCT £1
ORDER 3 CASSETTES
— DEDUCT £2 etc.

MICROPOWER

Moonraider (B) £7.99
Swoop (B) £7.99
Alien Destroyers (B) ... £7.99
Galactic Commander
(B) £7.99
Timetrek (B) £7.99
Laser Command (B) ... £7.99
Spacemaze (B) £6.85
Astro Navigator (B) ... £5.70
Maze Invaders (B) £5.70
Star Trek £5.70
Filer £10.30
Constellation (B) £6.85
Disassembler £6.85
Micro Budget £6.85
Killer Gorilla (B) £7.99
Croaker (B) £7.99
Chess (B) £7.99
Chess £5.70
Barrage (B) £7.99
Footer (B) £7.99
Labyrinths of Lacoshe
(B) £7.99
Adventure £7.99
Painter (B) £6.85
Cowboy Shootout
(B) £6.85
Munchyman £6.85
Caveman Adventure £6.85
Seek £6.85
Eldorado Gold (B) £6.85
Roulette (B) £5.70
Reversi 1 £5.70
Reversi 2 (B) £5.70
Yahtzee (B) £5.70
Wall (B) £5.70
Mastermind £4.55
Draw £10.30
Where £6.85
Chemistry £6.85
World Geography £6.85
Junior Maths Pack £6.85
Physics £6.85
Moon Base Alpha £7.99

OPUS

Dog Fight £9.95



Galaxians £7.95
Centipeds £7.95
Invaders £7.95
Space Fighter £7.95
Alien Dropout £7.95
Fruit Machine £7.95
Frogger £7.95
Road Runner £7.95
Pontoon £6.95
Cribbage £6.95



BBC
Supergolf £7.50
Bun Fun £6.50



Space Pirates £8.00
Space Warp £9.00
BBC Dragon Quest ... £11.50
BBC Fruit Machine £5.50
BBC Chess £8.00
BBC Backgammon £8.00
BBC Multifile £15.00
Space Invaders £7.50
Galaxy Wars £7.50
City Defence £7.50
Synthesizer £9.50
Sea Lord £7.50
Oblivion £7.50
Old Father Time P.O.A.
Graphics Package £9.50
Sea Lord £7.50

LEVEL 9 COMPUTING

ULTIMATE ADVENTURES

Colossal Adventure .. £10.00
Adventure Quest £10.00
Dungeon Adventure .. £10.00
BBC Forth £15.00
BBC Forth Tool Kit .. £10.00



BUSINESS SOFTWARE

Cash Book Acc. £95.00
Beeb Calc £19.95
Inv. & Statements £19.95
Commercial Acc. £19.95
Mailing List £19.95
Database £19.95
Stock Control £19.95
Home Accounts £19.95
Word Processor £19.95

Simon Hessel

Great Britain £5.95
Inheritance £6.95
The World Travel Game
..... £6.95

WORD PROCESSING

Wordwise £45.00
View £59.00

CREDIT FACILITIES

Ask about instant credit up to £1,000. Choose the credit
to suit you. The deposit is only 10% of the cost of your
purchase.

We are credit brokers for Lombard Tricity Finance Ltd.
Interest is just 2.25% per month, equivalent to an annual
percentage rate of 30.6%. Ask for a written quotation
today!

MAIL ORDER

Please send me

-
-
-
-
-

Postage and packing on software 50p. Phone for hardware
delivery rates.

I enclose cheque/P.O. for

OR please debit my Access/Barclaycard/Visa*

* delete as applicable

Card No Expiry date

Name

Address

..... Code

Tel No.

Dealers Discount Available

ACCESS, BARCLAYCARD VISA ORDERS WELCOME ON

24HR 051-420 3333


COMPUTER CITY Dept F. FREEPOST (No Stamp

Required) 78 Victoria Road, Widnes, Cheshire WA8 7RA.



TRADE ENQUIRIES WELCOME.

SPECIAL DEALS FOR SCHOOLS.



THE COMPUTER CAPITAL OF THE NORTH — SUPPLYING **BBC** MICROCOMPUTERS
NATIONWIDE FOR EDUCATION, BUSINESS AND LEISURE

INTRODUCING FELIX


TWO NEW
FABULOUS, FUN-PACKED
PROGRAMS FROM
BRITAIN'S LEADING
SOFTWARE HOUSE!



FELIX IN THE FACTORY

Left in charge of the factory one evening Felix must keep the generator lubricated. He has to retrieve a succession of oil cans left lying about by the dayshift mechanic. But out to stop him are some very determined Gremlins and Giant Rats with voracious appetites for humans. He must run along the conveyor leaping over packages, climb ladders, lay poison for the Rat and pitchfork the Gremlins off the walkways - all before the Generator seizes up! Superbly smooth animation and delightful graphics feature strongly in this all-action machine-code game.


KEEP THE GENERATOR
JUICED FOR
ONLY £7.95

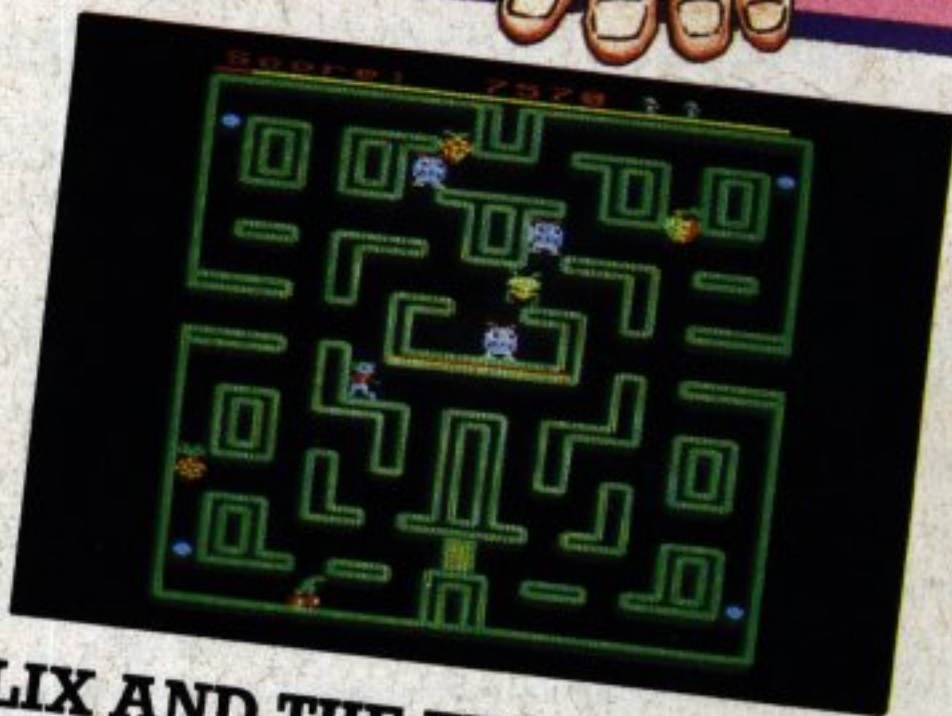

FELIX AND THE FRUIT MONSTERS

Venturing into the underground domain of interlocking passages Felix must protect the Magical Fruit (and himself) from marauding Fruit Monsters until their life-force runs out. By eating the fruit these remorseless creatures change into more aggressive mutations. Sleep-inducing Ether capsules aid Felix in his quest, and as a last ditch attempt he can trigger the magnetic pad to instantly teleport the creatures back to their cave. Dexterity and fast responses are at a premium in this second arcade-type game in the Felix series.

FIX THE
FRUIT MONSTERS
FOR ONLY £7.95

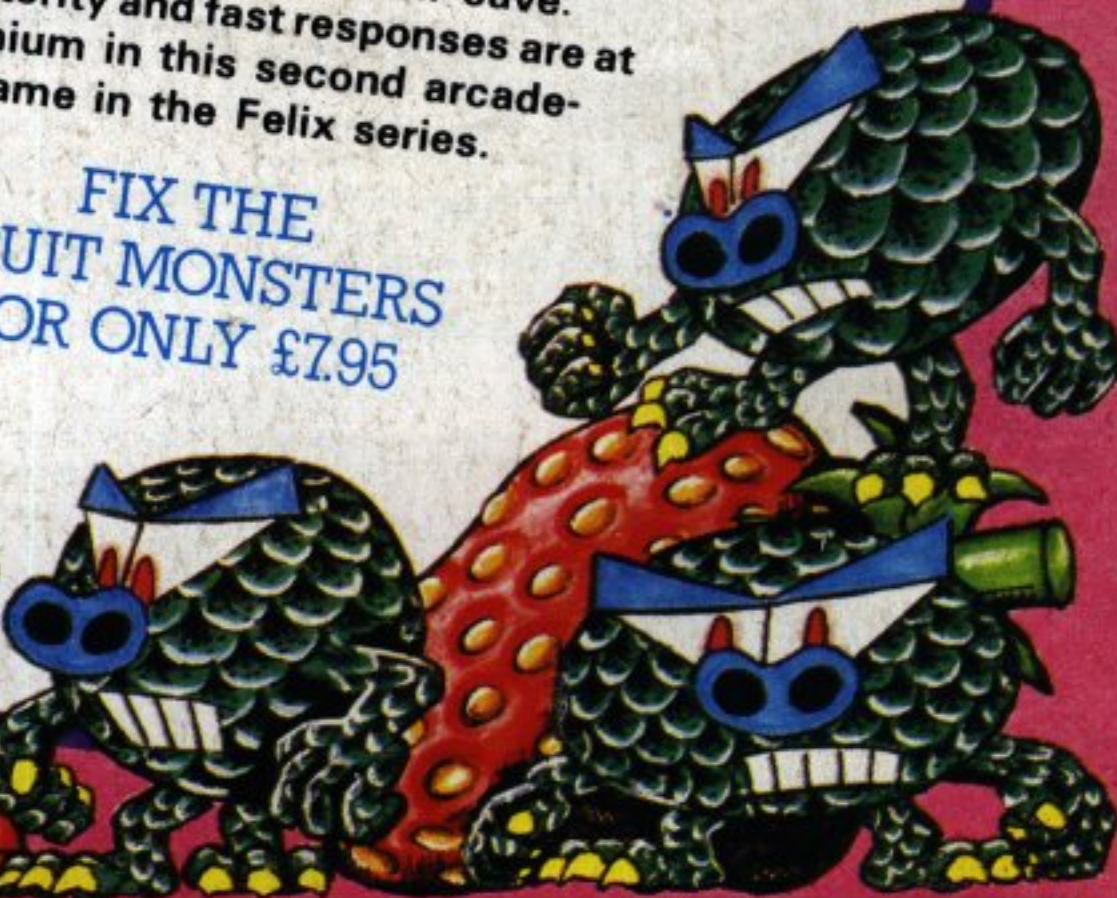

Other programs include: Killer Gorilla £7.95/
Escape from Moonbase Alpha £7.95/
Danger! UXB £7.95/Moon Raider £7.95/
Bandits at 3 o'clock £6.95/Swoop £7.95/
Demon Decorator £6.95/Croaker £7.95/
Alien Swirl £6.95/Reversi (A & B) £5.95/
Chess £7.95/Asteroid Storm £7.95/Laser
Command £7.95/Wall £5.95/Beebtoe £5.95/
Caveman Adventure £6.95/Labyrinths of
LaCoshe £7.95/Adventure £7.95/
World Geography £6.95/Where? £6.95/
Constellation £6.95/Physics £6.95/Chem-
istry £6.95/Junior Maths Pack £6.95/
Barrage £7.95/Galactic Commander £7.95/
Timetrek £7.95/Footer £7.95/Poker Dice
£5.95/Filer £9.95/Beebmon £7.95/Draw
£9.95/Disassembler £6.95.

MICRO POWER'S SOFTWARE IS NOW AVAILABLE AT
SELECTED BRANCHES OF W.H. SMITHS, BOOTS &
JOHN MENZIES.

Guarantee
THAT ALL OUR ADVERTISED
PROGRAMS HAVE BEEN
COMPLETED AND ARE
READILY AVAILABLE

WE ARE AUTHORISED DEALERS
FOR THE BBC MICRO, ELECTRON
& DRAGON 32

**SPECIAL
OFFER**

Deduct £1 per cassette
when ordering
two or more.

MICRO POWER LTD.
Dept. BMU 10,
8/8a REGENT STREET,
CHAPEL ALLERTON,
LEEDS LS7 4PE
Tel: (0532) 683186 or 696343

All prices inclusive of VAT. Please add 55p
per order Post and Packing.



Please note: All programs are available at all good
dealers or direct from MICRO POWER LTD.
Written any programs for the BBC Micro or
Electron? We pay 20% royalties!

ALL LEADING TITLE
WILL BE AVAILABLE
FOR THE NEW
ELECTRON